



A	公司简介 Companyinstruction	A1
B	管接头 Pipefittings	B1-B196
C	法兰 Flange	C1-C32
D	快换接头 Quickactioncoupling	D1-D14
E	钢制管件 Steelpipefitting	E1-E22
F	管夹 Pipeclamp	F1-F52
G	金属软管 胶管总成 Metalhoseandrubberhoseassembly	G1-G38
H	索引 Index	H1-H3



上海欧际冶金机械制造有限公司专业生产液压、润滑系统设备及管路附件，公司位于上海市宝山区顾村1号工业园区(富联路1188号)，占地12800米²，建筑面积5800米²，现有固定资产1168万元，公司拥有先进数控机床、精模锻等设备共258台套，本公司是集研究开发、生产、设计、制造为一体的实业公司，并实行计算机联网信息管理。

公司产品广泛应用于冶金、矿山、石油化工、工程机械、港口机械和交通运输等领域，欧际产品由于采用先进的精模锻技术、数控设备加工和配套高质量的进口密封元件，因而产品性能优越，质量稳定，深受用户好评。

欧际产品的供货范围主要包括以下几方面：

- 1、全系列引进转化的符合ISO、DIN标准的各种管接头、旋转接头、快速接头、SAE高压法兰、管夹等管路附件；
- 2、符合GB、GB/T、JB/ZQ、JB/T、JB等国家或行业标准的系列管路附件；
- 3、不锈钢波纹金属软管总成、液压橡胶软管总成和铠装液压橡胶软管总成；
- 4、干稀油润滑元件及部分液压设备；
- 5、承接设计制造各种非标的管路附件、液压系统和润滑系统。

上海欧际冶金机械制造有限公司同属上海欧际机电设备成套有限公司是一个对外经营窗口，主要从事液压润滑元器件、电机、空调、轴承泵组等到相关产品的进出口业务，为广大用户提供力士乐、威格士、万特赛、派克等世界知名厂家的产品。

公司服务宗旨：质量第一，用户至上，公司承诺：对产品实行“三包”。

我们衷心感谢新老客户对本公司的信赖与支持，愿与各界朋友真诚合作，共创辉煌！

The company professionally manufactures hydraulic, lubrication system and pipe fittings. It is located in the 1# industry zone of GUCUN Town of BAOSHAN District of Shanghai (1188# FULIAN ROAD). It covers a full area of 12800m² and the building covers 5800m². It possesses permanent capital 1.168 million yuan (RMB) and 258 sets of advanced numerical control machine tool and fine-forged machine tool. The company is an entity enterprise of researching, designing, manufacturing, managing by computer information network.

Our products are widely used in the conduits of metallurgy, mine, oil, chemical, engine machine, harbour machine, transporter, etc. The products are manufactured by fine-forged machine tool and numerical control machine tool, and these seals used are imported from Escort Seal Co., Ltd (Taiwan Province). So the performance and quality of the products are good. Following are a major range of our management:

1. We have introduced and transformed all series of all type fittings, swivel fittings, quick-action fittings, SAE high pressure flanges, pipe clamps and other fittings in accordance with ISO, DIN standard;
2. We also manufacture all series National Standard pipe fittings (according to GB, GB/T, JB/ZQ, JB/T, JB)
3. Stainless steel rugged metal hose assembly, hydraulic rubber hose assembly and armored hydraulic rubber hose assembly;
4. Grease & oil lubrication and hydraulic components;
5. Designing and manufacturing non-standard pipe fittings, hydraulic system and lubrication system.

Shanghai OUJI Complete Set of Mechanical and Electrical Co., Ltd is the brother enterprise of Shanghai OUJI Metallurgy Machine Manufacture Co., Ltd. It acts to manage the imported hydraulic and lubrication components, motors, air-conditions, bearings and battery of pumps.

The policy of our company is: Quality is of the most importance, users are My God. The permission of our company is: To carry out "SANBAO" policy in the after selling service.

Thanks for the belief and support of our customers. We are looking forward to the future sincere co-operation with you.

端直通连接 Male straight connecting union

型号说明:
型号中间的字母代
表连接螺纹(以下均
同)

其意义如下:

M-公制螺纹

G-英制管螺纹

U-美制螺纹

Z-公制锥螺纹

R-英制锥管螺纹

N-美制锥螺纹

例: IDGUN

其中: G代表端螺
纹为英制管螺

The middle of the
alphabet in the
code is the
connecting thread
(the following is
the same):

M-Metric thread

G-British standard
pipe thread

U-American

standard thread

Z-Metric cone pipe
thread

R-British standard

cone pipe thread

N-American

standard cone


pipe thread

Example: IDGUN


It is the British

standard pipe


thread




IDGUA
(B9-B10)



IDGUB
(B11-B12)




IDMUA
(B13)



IDMUB
(B14)



IDMQA
(B15)




IDMQB
(B16)




IDGOA IDMOA
(B17)




IDGOB IDMOB
(B18)




IDUQA
(B19)




IDUQB
(B20)




IDGJA
(B21-B22)




IDGJB
(B23-B24)




IDGLA
(B25-B26)




IDGLB
(B27-B28)




IDMJA
(B29)




IDMJB
(B30)




IDMLA
(B31)




IDMLB
(B32)




IDRXA IDZXA
(B33)




IDRXB
(B34)




IDNXA
(B35-B36)




IDNXB
(B37-B38)



IDGUC
(B39)



IDGUW
(B40)




IDMUC
(B41)



IDMUW
(B42)




IDMQW
(B43)



IDNXW
(B44)


管连接 Tube connectors




IAXXA
(B45)


























IBXXB
(B45)




LAXXA
(B46)




LBXXB
(B46)

管连接 Tube connectors	 TXXXA (B47)	 TBXXB (B47)	 XAXXA (B48)	 XBXXB (B48)
隔板连接 Bulkhead union	 HAXXA (B49)	 HBXXB (B50)	 MAXXA (B51)	 MBXXB (B52)
变径连接 Straight reducing adapter	 BAXXA (B53) Fig.A  BDGUN (B59)	 BBXXB (B54) Fig.B  BDGUN (B59)	 EAXXA (B55-B56) Fig.A  BDGLN (B60)	 EBXXB (B57-B58) Fig.B  BDGLN (B60)
端直角连接 Maleelbow connecting union	 LDZXA (B66)  LDNXXA (B70)	 LDZXB (B67)  LDNXXB (B71)	 LDRXA (B68)  LDGJA (B72)	 LDRXB (B69)  LDGJB (B73)


可调端连接
Male adjustable
connecting union




LKMOA
(B74)




LKMOB
(B75)




TKMOA
(B76)




TKMOB
(B77)




FKMOA
(B78)




FKMOB
(B79)




L45KMOA
(B80)




L45KMOB
(B81)




LKMQA
(B82)




LKMQB
(B83)




TKMQA
(B84)




TKMQB
(B85)




FKMQA
(B86)




FKMQB
(B87)




L45KMQA
(B88)




L45KMQB
(B89)




LKGOA
(B90)




LKGOB
(B91)




TKGOA
(B92)




TKGOB
(B93)




FKGOA
(B94)




FKGOB
(B95)




L45KGOA
(B96)




L45KGOB
(B97)




LKUQA
(B98)

























LKUQB
(B99)






















TKUQA
(B100)




TKUQB
(B101)

可调端连接 Male adjustable connecting union				
	FKUQA (B102)	FKUQB (B103)	L45KUQA (B104)	L45KUQB (B105)
内螺纹连接 Female straight connecting union				
	LKGXA LKMXA (B106)	LKGXB LKMXB (B107)		
				
	INMXA (B108)	INMXB (B109)	INGXA (B110)	INGXB (B111)
				
	INNXA (B112)	INNXB (B113)		
铰接式连接 Swivel union				
	JDMJA (B114)	JDMJB (B115)	GDMJA (B116)	GDMJB (B117)
				
	KDMJA (B118)	KDMJB (B119)	JDGJA (B120)	JDGJB (B121)
				
	GDGJA (B122)	GDGJB (B123)	KDGJA (B124)	KDGJB (B125)


铰接式连接 Swivelunion				
	GDGOB GDMOB (B126)	KDG OB KDMOB (B127)	ZDGUA (B128)	ZDGUB (B129)
	ZDMUA (B130)	ZDMUB (B131)	ZAXXA (B132)	ZBXXB (B133)
组合连接 Adjustableunion				
	LWXXA (B134)	LWXXB (B135)	LCXXA (B136)	TWXXA (B137)
	TWXXB (B138)	TCXXA (B139)	FWXXA (B140)	FWXXB (B141)
	FCXXA (B142)	IWXXW (B143)	LWXXW (B144)	
焊连接 Butt-weldingunion				
	IYXXA (B145)	IYXXB (B146)	LYXXA (B147)	LYXXB (B148)
	IHXXB (B149)	IXXXA (B150)	IXXXB (B150)	LEXXH (B151)

焊连接 Butt-welding union	  IHXXH (B152) IDRXH (B153)
压力表连接 Manorneterfitting	   YBA (B154) YBB (B154) YBC (B155)
测试点接头 Manorneterfitting	<!-- Row 1 -->   CSA (B156)   CSB (B156)   CSC (B156)   CSD (B156)  CSE (B157)  CSF (B157) <!-- Row 2 -->  CSG (B158)  CSH (B159)  CSI (B160)  CSJ (B160)  CSK (B160)
插焊接头 Socketwelding adpter	<!-- Row 1 -->  CHA (B161)  CHB (B161)  CHC (B161) <!-- Row 2 -->  CHD (B162)  CHE (B162)


内外接头
Nipplebushing
coupling/plug




NTA
(B163)




NTB
(B164)




NTC
(B165)




JTX
(B174)




NTD
(B166)




NTE
(B166)




NTF
(B167)




NWT
(B168)





DTA
(B169)




DTB
(B169)




DTC
(B170)




DTD
(B171)



DTE
(B171)




TGA
(B172)




TGB
(B173)


活接头
Union




HTA
(B175)




HTB
(B175)




HTC
(B176)



HTD
(B176)




HTE
(B177)




HTF
(B177)




集合管接头
Threadconnecting
block




JTA
(B178)





JTB
(B178)




JTC
(B179)




JTD
(B179)



旋转接头
Swivel connection

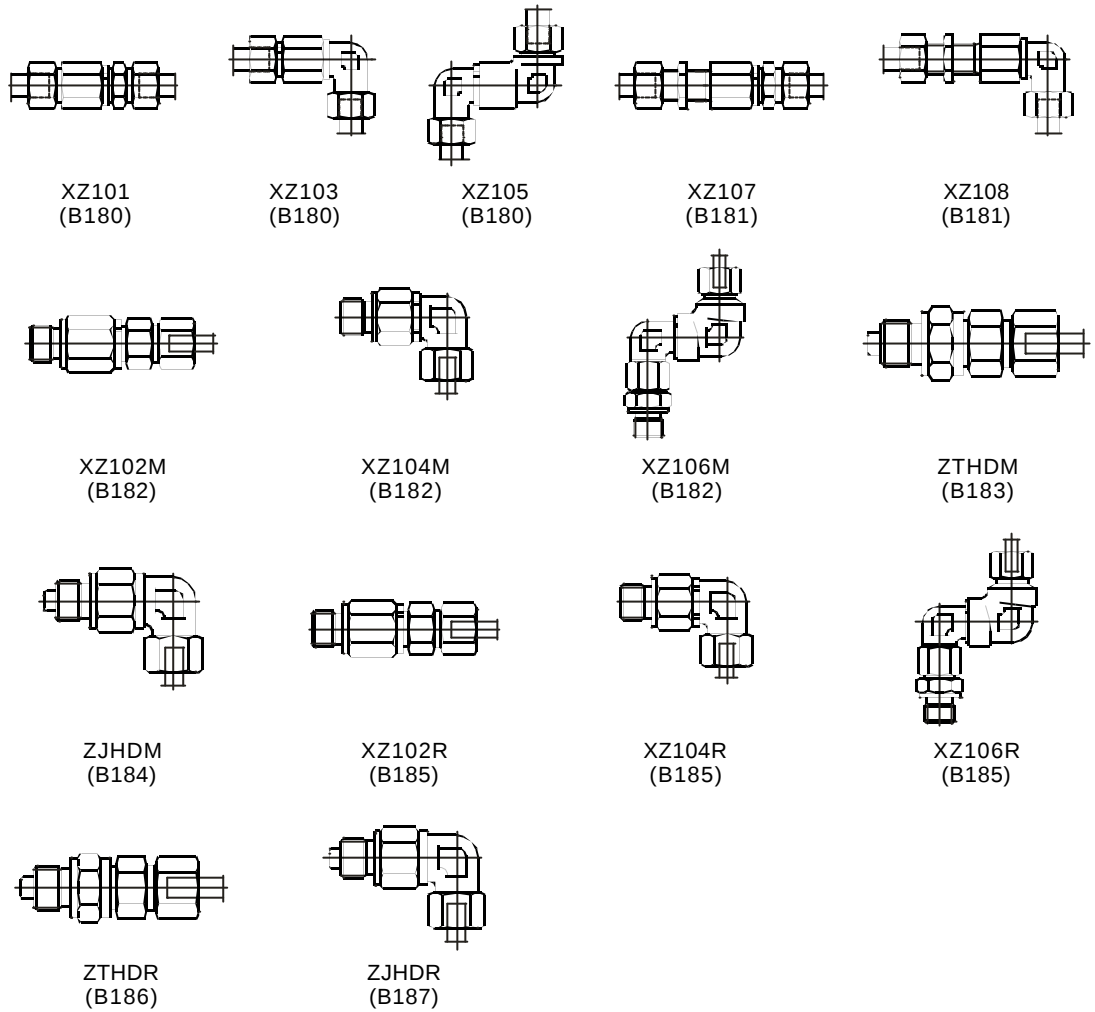


单向阀
Checkvalve

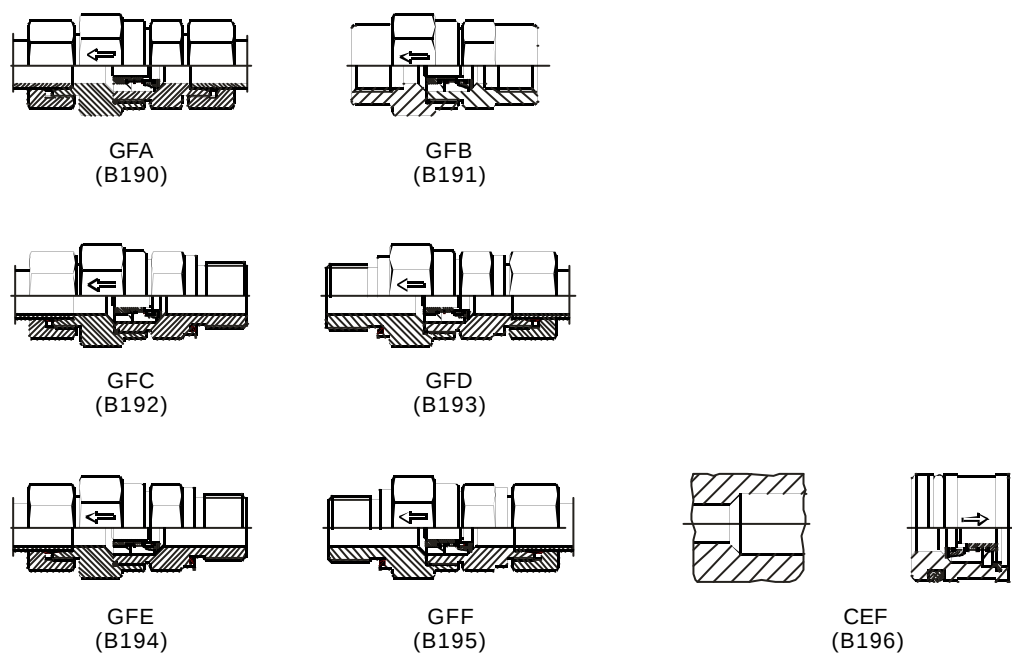

IDGUA

端直通接头—英制螺纹带U型密封

Male straight connecting union—British standard thread with U-ring seal

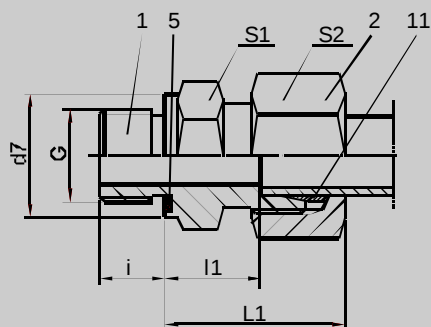

IDGUA

Part1—本体Male body

Part2—螺母Nut

Part5—U形圈U-ring

Part11—卡套Ferrule

订货示例：型号为IDGUA04LL，材料为碳钢，仅供本体和螺母时，订货号为0100901G Part1+2。

Order example: Type is IDGUA04LL, material is carbon steel, only ordering body and nut, the reference is 0100901G Part1+2.

Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号 IDGUA	G	L1	l1	i	S2	S1	d7	Weight 重量(g) IDGUA
LL	100	04	IDGUA04LL	0100901*	G1/8A	19	9.5	8	10	14	14	16
	100	06	IDGUA06LL	0100902*	G1/8A	20	8.0	8	12	14	14	17
L	315	06	IDGUA06L	0100903*	G1/8A	23	8.5	8	14	14	14	25
	315	06	IDGUA06L/G1/4A	0100904*	G1/4A	25	10.0	12	14	19	19	40
	315	06	IDGUA06L/G3/8A	0100905*	G3/8A	26	11.5	12	14	22	22	50
	315	06	IDGUA06L/G1/2A	0100906*	G1/2A	27	12.0	14	14	27	27	72
	315	08	IDGUA08L	0100907*	G1/4A	25	10.0	12	17	19	19	44
	315	08	IDGUA08L/G1/8A	0100908*	G1/8A	24	9.5	8	17	14	14	33
	315	08	IDGUA08L/G3/8A	0100909*	G3/8A	26	11.5	12	17	22	22	62
	315	08	IDGUA08L/G1/2A	0100910*	G1/2A	27	12.0	14	17	27	27	91
	315	10	IDGUA10L	0100911*	G1/4A	26	11.0	12	19	19	19	48
	315	10	IDGUA10L/G1/8A	0100912*	G1/8A	25	10.5	8	19	17	14	42
	315	10	IDGUA10L/G3/8A	0100913*	G3/8A	27	12.5	12	19	22	22	64
	315	10	IDGUA10L/G1/2A	0100914*	G1/2A	28	13.0	14	19	27	27	90
	315	12	IDGUA12L	0100915*	G3/8A	27	12.5	12	22	22	22	70
	315	12	IDGUA12L/G1/4A	0100916*	G1/4A	27	12.0	12	22	19	19	57
	315	12	IDGUA12L/G1/2A	0100917*	G1/2A	28	13.0	14	22	27	27	96
	315	12	IDGUA12L/G3/4A	0100918*	G3/4A	29	14.0	16	22	32	32	147
	315	15	IDGUA15L	0100919*	G1/2A	29	14.0	14	27	27	27	118
	315	15	IDGUA15L/G3/8A	0100920*	G3/8A	29	13.5	12	27	24	22	100
	315	15	IDGUA15L/G3/4A	0100921*	G3/4A	30	15.0	16	27	32	32	163
	315	18	IDGUA18L	0100922*	G1/2A	31	14.5	14	32	27	27	138
	315	18	IDGUA18L/G3/8A	0100923*	G3/8A	30	14.0	12	32	27	22	139
	315	18	IDGUA18L/G3/4A	0100924*	G3/4A	31	14.5	16	32	32	32	178
	160	22	IDGUA22L	0100925*	G3/4A	33	16.5	16	36	32	32	191
	160	22	IDGUA22L/G1/2A	0100926*	G1/2A	33	16.5	14	36	32	27	180
	160	22	IDGUA22L/G1A	0100927*	G1A	34	17.5	18	36	41	40	278
	160	28	IDGUA28L	0100928*	G1A	34	17.5	18	41	41	40	268
	160	28	IDGUA28L/G3/4A	0100929*	G3/4A	34	17.5	16	41	41	32	268
	160	28	IDGUA28L/G11/4A	0100930*	G11/4A	35	18.5	20	41	50	50	414
	160	35	IDGUA35L	0100931*	G11/4A	39	17.5	20	50	50	50	428
	160	35	IDGUA35L/G1A	0100932*	G1A	39	17.5	18	50	46	40	407
	160	35	IDGUA35L/G11/2A	0100933*	G11/2A	41	19.5	22	50	55	55	579
	160	42	IDGUA42L	0100934*	G11/2A	42	19.0	22	60	55	55	583
	160	42	IDGUA42L/G1A	0100935*	G1A	42	19.0	18	60	55	40	559
	160	42	IDGUA42L/G11/4A	0100936*	G11/4A	42	19.0	20	60	55	50	587

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.

上海欧际冶金机械制造有限公司


地址: 上海市宝山区富联路1188号

电话: 021-66047188 66047818 传真: 021-66047588

IDGUA

端直接头—英制螺纹带U型密封

Male straight connecting union—British standard thread with U-ring seal

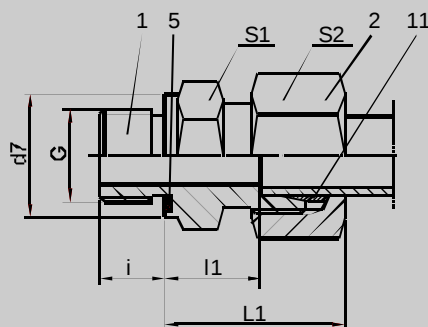

IDGUA

Part1—本体Male body

Part2—螺母Nut

Part5—U形圈U-ring

Part11—卡套Ferrule

订货示例：型号为IDGUA06S，材料为碳钢，仅供本体和螺母时，订货号为0101001G Part1+2。

Order example: Type is IDGUA06S, material is carbon steel, only ordering body and nut, the reference is 0101001G Part1+2.

Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号 IDGUA	G	L1	l1	i	S2	S1	d7	Weight 重量(g) IDGUA
S	630	06	IDGUA06S	0101001*	G1/4A	28	13.0	12	17	19	19	54
	630	06	IDGUA06S/G1/8A	0101002*	G1/8A	27	12.5	8	17	14	14	40
	630	06	IDGUA06S/G3/8A	0101003*	G3/8A	30	15.5	12	17	22	22	72
	630	06	IDGUA06S/G1/2A	0101004*	G1/2A	33	18.0	14	17	27	27	102
	630	08	IDGUA08S	0101005*	G1/4A	30	15.0	12	19	19	19	63
	630	08	IDGUA08S/G3/8A	0101006*	G3/8A	30	15.5	12	19	22	22	79
	630	08	IDGUA08S/G1/2A	0101007*	G1/2A	33	18.0	14	19	27	27	108
	630	10	IDGUA10S	0101008*	G3/8A	31	15.0	12	22	22	22	89
	630	10	IDGUA10S/G1/4A	0101009*	G1/4A	31	14.5	12	22	19	19	75
	630	10	IDGUA10S/G1/2A	0101010*	G1/2A	34	17.5	14	22	27	27	130
	630	12	IDGUA12S	0101011*	G3/8A	33	17.0	12	24	22	22	100
	630	12	IDGUA12S/G1/4A	0101012*	G1/4A	33	16.5	12	24	22	19	95
	630	12	IDGUA12S/G1/2A	0101013*	G1/2A	34	17.5	14	24	27	27	137
	630	14	IDGUA14S	0101014*	G1/2A	37	19.0	14	27	27	27	154
	630	14	IDGUA14S/G3/8A	0101015*	G3/8A	36	18.5	12	27	24	22	131
	630	14	IDGUA14S/G3/4A	0101016*	G3/4A	39	21.0	16	27	32	32	198
	400	16	IDGUA16S	0101017*	G1/2A	37	18.5	14	30	27	27	162
	400	16	IDGUA16S/G3/8A	0101018*	G3/8A	36	18.0	12	30	27	22	154
	400	16	IDGUA16S/G3/4A	0101019*	G3/4A	39	20.5	16	30	32	27	223
	400	20	IDGUA20S	0101020*	G3/4A	42	20.5	16	36	32	32	263
	400	20	IDGUA20S/G1/2A	0101021*	G1/2A	42	20.5	14	36	32	27	255
	400	20	IDGUA20S/G1A	0101022*	G1A	44	22.5	18	36	41	40	369
	400	20	IDGUA20S/G11/4A	0101023*	G11/4A	44	22.5	20	36	50	50	410
	400	25	IDGUA25S	0101024*	G1A	47	23.0	18	46	41	40	481
	400	25	IDGUA25S/G1/2A	0101025*	G1/2A	47	23.0	14	46	41	27	444
	400	25	IDGUA25S/G3/4A	0101026*	G3/4A	47	23.0	16	46	41	32	471
	400	25	IDGUA25S/G11/4A	0101027*	G11/4A	47	23.0	20	46	50	50	643
	400	25	IDGUA25S/G11/2A	0101028*	G11/2A	50	26.0	22	46	55	55	653
	400	30	IDGUA30S	0101029*	G11/4A	50	23.5	20	50	50	50	656
	400	30	IDGUA30S/G1A	0101030*	G1A	50	23.5	18	50	46	40	599
	400	30	IDGUA30S/G11/2A	0101031*	G11/2A	53	26.5	22	50	55	55	765
	315	38	IDGUA38S	0101032*	G11/2A	57	26.0	22	60	55	55	924
	315	38	IDGUA38S/G11/4A	0101033*	G11/4A	57	26.0	20	60	55	50	936

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.


IDGUB

端直接头—英制螺纹带U型密封

Male straight connecting union—British standard thread with U-ring seal



- Part1—本体Male body
Part2—螺母Nut
Part3—焊接头Welding cone
Part4—O形圈O-ring
Part5—U形圈U-ring

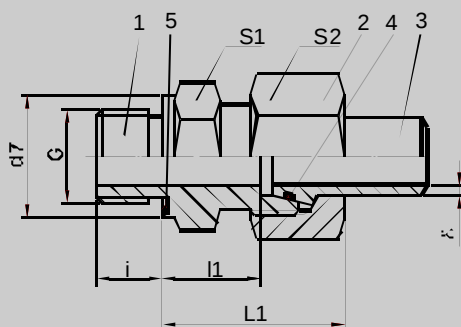

IDGUB

订货示例：型号为IDGUB06× $\frac{1}{4}$ L，材料为碳钢，仅供本体和螺母时，订货号为0101101G Part1+2。

Order example: Type is IDGUB06× $\frac{1}{4}$ L, material is carbon steel, only ordering body and nut, the reference is 0101101G Part1+2.

Series 系列	PN	Tube OD 管子外径	Type 型号	Reference 订货号 IDGUB	G	L1	l1	i	S2	S1	d7	Weight 重量(g) IDGUB
L	315	06	IDGUB06× $\frac{1}{4}$ L	0101101*	G1/8A	23	8.5	8	14	14	14	32
	315	06	IDGUB06× $\frac{1}{4}$ L/G1/4A	0101102*	G1/4A	25	10.0	12	14	19	19	47
	315	06	IDGUB06× $\frac{1}{4}$ L/G3/8A	0101103*	G3/8A	26	11.5	12	14	22	22	57
	315	06	IDGUB06× $\frac{1}{4}$ L/G1/2A	0101104*	G1/2A	27	12.0	14	14	27	27	79
	315	08	IDGUB08× $\frac{1}{4}$ L	0101105*	G1/4A	25	10.0	12	17	19	19	55
	315	08	IDGUB08× $\frac{1}{4}$ L/G1/8A	0101106*	G1/8A	24	9.5	8	17	14	14	44
	315	08	IDGUB08× $\frac{1}{4}$ L/G3/8A	0101107*	G3/8A	26	11.5	12	17	22	22	73
	315	08	IDGUB08× $\frac{1}{4}$ L/G1/2A	0101108*	G1/2A	27	12.0	14	17	27	27	102
	315	10	IDGUB10× $\frac{1}{4}$ L	0101109*	G1/4A	26	11.0	12	19	19	19	64
	315	10	IDGUB10× $\frac{1}{4}$ L/G1/8A	0101110*	G1/8A	25	10.5	8	19	17	14	58
	315	10	IDGUB10× $\frac{1}{4}$ L/G3/8A	0101111*	G3/8A	27	12.5	12	19	22	22	80
	315	10	IDGUB10× $\frac{1}{4}$ L/G1/2A	0101112*	G1/2A	28	13.0	14	19	27	27	106
	315	12	IDGUB12× $\frac{1}{4}$ L	0101113*	G3/8A	27	12.5	12	22	22	22	92
	315	12	IDGUB12× $\frac{1}{4}$ L/G1/4A	0101114*	G1/4A	27	12.0	12	22	19	19	79
	315	12	IDGUB12× $\frac{1}{4}$ L/G1/2A	0101115*	G1/2A	28	13.0	14	22	27	27	118
	315	12	IDGUB12× $\frac{1}{4}$ L/G3/4A	0101116*	G3/4A	29	14.0	16	22	32	32	169
	315	15	IDGUB15× $\frac{1}{4}$ L	0101117*	G1/2A	29	14.0	14	27	27	27	149
	315	15	IDGUB15× $\frac{1}{4}$ L/G3/8A	0101118*	G3/8A	29	13.5	12	27	24	22	131
	315	15	IDGUB15× $\frac{1}{4}$ L/G3/4A	0101119*	G3/4A	30	15.0	16	27	32	32	194
	315	18	IDGUB18× $\frac{1}{4}$ L	0101120*	G1/2A	31	14.5	14	32	27	27	175
	315	18	IDGUB18× $\frac{1}{4}$ L/G3/8A	0101121*	G3/8A	30	14.0	12	32	27	22	176
	315	18	IDGUB18× $\frac{1}{4}$ L/G3/4A	0101122*	G3/4A	31	14.5	16	32	32	32	215
	160	22	IDGUB22× $\frac{1}{4}$ L	0101123*	G3/4A	33	16.5	16	36	32	32	242
	160	22	IDGUB22× $\frac{1}{4}$ L/G1/2A	0101124*	G1/2A	33	16.5	14	36	32	27	231
	160	22	IDGUB22× $\frac{1}{4}$ L/G1A	0101125*	G1A	34	17.5	18	36	41	40	329
	160	28	IDGUB28× $\frac{1}{4}$ L	0101126*	G1A	34	17.5	18	41	41	40	356
	160	28	IDGUB28× $\frac{1}{4}$ L/G3/4A	0101127*	G3/4A	34	17.5	16	41	41	32	356
	160	28	IDGUB28× $\frac{1}{4}$ L/G11/4A	0101128*	G11/4A	35	18.5	20	41	50	50	502
	160	35	IDGUB35× $\frac{1}{4}$ L	0101129*	G11/4A	39	17.5	20	50	50	50	578
	160	35	IDGUB35× $\frac{1}{4}$ L/G1A	0101130*	G1A	39	17.5	18	50	46	40	557
	160	35	IDGUB35× $\frac{1}{4}$ L/G11/2A	0101131*	G11/2A	41	19.5	22	50	55	55	729
	160	42	IDGUB42× $\frac{1}{4}$ L	0101132*	G11/2A	42	19.0	22	60	55	55	773
	160	42	IDGUB42× $\frac{1}{4}$ L/G1A	0101133*	G1A	42	19.0	18	60	55	40	749
	160	42	IDGUB42× $\frac{1}{4}$ L/G11/4A	0101134*	G11/4A	42	19.0	20	60	55	50	777

*材料：G—碳钢；B—不锈钢。

*Material: G—Carbon steel; B—Stainless steel.

上海欧际冶金机械制造有限公司

地址：上海市宝山区富联路1188号

电话：021-66047188 66047818 传真：021-66047588

B11


IDGUB

端直接头—英制螺纹带U型密封

Male straight connecting union—British standard thread with U-ring seal



- Part1—本体Male body
Part2—螺母Nut
Part3—焊接头Welding cone
Part4—O形圈O-ring
Part5—U形圈U-ring

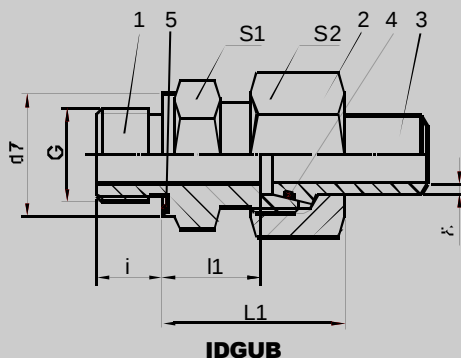

IDGUB

订货示例：型号为IDGUB06× $\frac{1}{2}$ S，材料为碳钢，仅供本体和螺母时，订货号为0101201G Part1+2。
Order example: Type is IDGUB06× $\frac{1}{2}$ S, material is carbon steel, only ordering body and nut, the reference is 0101201G Part1+2.


Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号 IDGUB	G	L1	l1	i	S2	S1	d7	Weight 重量(g) IDGUB
S	630	06	IDGUB06× $\frac{1}{2}$ S	0101201*	G1/4A	28	13.0	12	17	19	19	61
	630	06	IDGUB06× $\frac{1}{2}$ S/G1/8A	0101202*	G1/8A	27	12.5	8	17	14	14	47
	630	06	IDGUB06× $\frac{1}{2}$ S/G3/8A	0101203*	G3/8A	30	15.5	12	17	22	22	79
	630	06	IDGUB06× $\frac{1}{2}$ S/G1/2A	0101204*	G1/2A	33	18.0	14	17	27	27	109
	630	08	IDGUB08× $\frac{1}{2}$ S	0101205*	G1/4A	30	15.0	12	19	19	19	71
	630	08	IDGUB08× $\frac{1}{2}$ S/G3/8A	0101206*	G3/8A	30	15.5	12	19	22	22	88
	630	08	IDGUB08× $\frac{1}{2}$ S/G1/2A	0101207*	G1/2A	33	18.0	14	19	27	27	116
	630	10	IDGUB10× $\frac{1}{2}$ S	0101208*	G3/8A	31	15.0	12	22	22	22	105
	630	10	IDGUB10× $\frac{1}{2}$ S/G1/4A	0101209*	G1/4A	31	14.5	12	22	19	19	91
	630	10	IDGUB10× $\frac{1}{2}$ S/G1/2A	0101210*	G1/2A	34	17.5	14	22	27	27	146
	630	12	IDGUB12× $\frac{1}{2}$ S	0101211*	G3/8A	33	17.0	12	24	22	22	122
	630	12	IDGUB12× $\frac{1}{2}$ S/G1/4A	0101212*	G1/4A	33	16.5	12	24	22	19	117
	630	12	IDGUB12× $\frac{1}{2}$ S/G1/2A	0101213*	G1/2A	34	17.5	14	24	27	27	159
	630	14	IDGUB14× $\frac{1}{2}$ S	0101214*	G1/2A	37	19.0	14	27	27	27	187
	630	14	IDGUB14× $\frac{1}{2}$ S/G3/8A	0101215*	G3/8A	36	18.5	12	27	24	22	164
	630	14	IDGUB14× $\frac{1}{2}$ S/G3/4A	0101216*	G3/4A	39	21.0	16	27	32	32	231
	400	16	IDGUB16× $\frac{1}{2}$ S	0101217*	G1/2A	37	18.5	14	30	27	27	203
	400	16	IDGUB16× $\frac{1}{2}$ S/G3/8A	0101218*	G3/8A	36	18.0	12	30	27	22	195
	400	16	IDGUB16× $\frac{1}{2}$ S/G3/4A	0101219*	G3/4A	39	20.5	16	30	32	27	264
	400	20	IDGUB20× $\frac{1}{2}$ S	0101220*	G3/4A	42	20.5	16	36	32	32	341
	400	20	IDGUB20× $\frac{1}{2}$ S/G1/2A	0101221*	G1/2A	42	20.5	14	36	32	27	333
	400	20	IDGUB20× $\frac{1}{2}$ S/G1A	0101222*	G1A	44	22.5	18	36	41	40	447
	400	20	IDGUB20× $\frac{1}{2}$ S/G11/4A	0101223*	G11/4A	44	22.5	20	36	50	50	488
	400	25	IDGUB25× $\frac{1}{2}$ S	0101224*	G1A	47	23.0	18	46	41	40	606
	400	25	IDGUB25× $\frac{1}{2}$ S/G1/2A	0101225*	G1/2A	47	23.0	14	46	41	27	569
	400	25	IDGUB25× $\frac{1}{2}$ S/G3/4A	0101226*	G3/4A	47	23.0	16	46	41	32	596
	400	25	IDGUB25× $\frac{1}{2}$ S/G11/4A	0101227*	G11/4A	47	23.0	20	46	50	50	768
	400	25	IDGUB25× $\frac{1}{2}$ S/G11/2A	0101228*	G11/2A	50	26.0	22	46	55	55	778
	400	30	IDGUB30× $\frac{1}{2}$ S	0101229*	G11/4A	50	23.5	20	50	50	50	844
	400	30	IDGUB30× $\frac{1}{2}$ S/G1A	0101230*	G1A	50	23.5	18	50	46	40	787
	400	30	IDGUB30× $\frac{1}{2}$ S/G11/2A	0101231*	G11/2A	53	26.5	22	50	55	55	953
	315	38	IDGUB38× $\frac{1}{2}$ S	0101232*	G11/2A	57	26.0	22	60	55	55	1227
	315	38	IDGUB38× $\frac{1}{2}$ S/G11/4A	0101233*	G11/4A	57	26.0	20	60	55	50	1239
	315	50	IDGUB50× $\frac{1}{2}$ S	0101234*	G2A	72	36.0	24	80	70	70	2250
	315	50	IDGUB50× $\frac{1}{2}$ S/G13/4A	0101235*	G13/4A	72	36.0	24	80	70	60	2230

*材料：G—碳钢；B—不锈钢。 *Material: G—Carbon steel; B—Stainless steel.

IDMUA

端直通接头—公制螺纹带U型密封

Male straight connecting union—Metric thread with U-ring seal

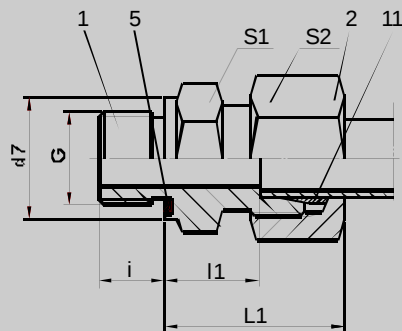

Part1—本体Male body
Part2—螺母Nut
Part5—U形圈U-ring
Part11—卡套Ferrule

IDMUA

订货示例：型号为IDMUA06L，材料为碳钢，仅供本体和螺母时，订货号为0101301G Part1+2。

Order example: Type is IDMUA06L, material is carbon steel, only ordering body and nut, the reference is 0101301G Part1+2.

Series 系列	PN	Tube OD 管子外径	Type 型号	Reference 订货号 IDMUA	G	L1	l1	i	S2	S1	d7	Weight 重量(g) IDMUA
L	315	06	IDMUA06L	0101301*	M10×1	23	8.5	8	14	14	14	25
	315	08	IDMUA08L	0101302*	M12×1.5	25	10.0	12	17	17	17	39
	315	10	IDMUA10L	0101303*	M14×1.5	26	11.0	12	19	19	19	50
	315	10	IDMUA10L/M12×1.5	0101304*	M12×1.5	26	11.0	12	19	17	17	46
	315	10	IDMUA10L/M16×1.5	0101305*	M16×1.5	24	12.5	12	19	22	22	61
	315	10	IDMUA10L/M18×1.5	0101306*	M18×1.5	27	12.5	12	19	24	24	71
	315	10	IDMUA10L/M22×1.5	0101307*	M22×1.5	29	14.0	14	19	27	27	101
	315	12	IDMUA12L	0101308*	M16×1.5	27	12.5	12	22	22	22	68
	315	12	IDMUA12L/M14×1.5	0101309*	M14×1.5	26	11.0	12	22	19	19	57
	315	12	IDMUA12L/M18×1.5	0101310*	M18×1.5	27	12.5	12	22	24	24	75
	315	12	IDMUA12L/M22×1.5	0101311*	M22×1.5	29	14.0	14	22	27	27	103
	315	15	IDMUA15L	0101312*	M18×1.5	29	13.5	12	27	24	24	97
	315	15	IDMUA15L/M16×1.5	0101313*	M16×1.5	28	13.0	12	27	24	22	95
	315	15	IDMUA15L/M22×1.5	0101314*	M22×1.5	30	15.0	14	27	27	27	123
	315	18	IDMUA18L	0101315*	M22×1.5	31	14.5	14	32	27	27	142
	315	18	IDMUA18L/M18×1.5	0101316*	M18×1.5	30	14.0	12	32	27	24	136
	160	22	IDMUA22L	0101317*	M26×1.5	33	16.5	16	36	32	32	192
	160	22	IDMUA22L/M22×1.5	0101318*	M22×1.5	33	16.5	14	36	32	32	186
	160	28	IDMUA28L	0101319*	M33×2	34	17.5	18	41	41	40	267
	160	35	IDMUA35L	0101320*	M42×2	39	17.5	20	50	50	50	437
	160	42	IDMUA42L	0101321*	M48×2	42	19.0	22	60	55	55	595
S	630	06	IDMUA06S	0101322*	M12×1.5	28	13.0	12	17	17	17	48
	630	06	IDMUA06S/M14×1.5	0101323*	M14×1.5	30	15.0	12	17	19	19	58
	630	08	IDMUA08S	0101324*	M14×1.5	30	15.0	12	19	19	19	64
	630	10	IDMUA10S	0101325*	M16×1.5	31	15.0	12	22	22	22	88
	630	12	IDMUA12S	0101326*	M18×1.5	33	17.0	12	24	24	24	108
	630	12	IDMUA12S/M14×1.5	0101327*	M14×1.5	33	16.5	12	24	22	19	99
	630	12	IDMUA12S/M22×1.5	0101328*	M22×1.5	34	17.5	14	24	27	27	139
	630	14	IDMUA14S	0101329*	M20×1.5	37	19.0	14	27	27	26	151
	400	16	IDMUA16S	0101330*	M22×1.5	37	18.5	14	30	27	27	167
	400	16	IDMUA16S/M18×1.5	0101331*	M18×1.5	36	18.0	12	30	27	24	159
	400	20	IDMUA20S	0101332*	M27×2	42	20.5	16	36	32	32	264
	400	25	IDMUA25S	0101333*	M33×2	47	23.0	18	46	41	40	479
	400	30	IDMUA30S	0101334*	M42×2	50	23.5	20	50	50	50	660
	315	38	IDMUA38S	0101335*	M48×2	57	26.0	22	60	55	55	930

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.


上海欧际冶金机械制造有限公司

地址: 上海市宝山区富联路1188号

电话: 021-66047188 66047818 传真: 021-66047588

B13

Part1—本体Male body
Part2—螺母Nut
Part3—焊接头Welding cone
Part4—O形圈O-ring
Part5—U形圈U-ring

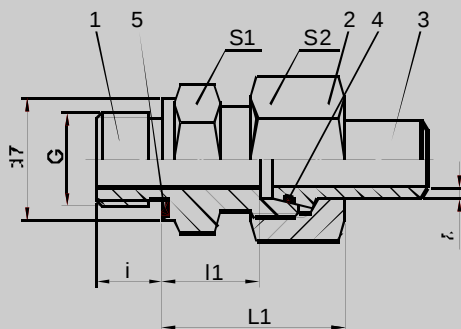

IDMUB

订货示例: 型号为IDMUB06× $\frac{1}{2}$ L, 材料为碳钢, 仅供本体和螺母时, 订货号为0101401G Part1+2。

Order example: Type is IDMUB06× $\frac{1}{2}$ L, material is carbon steel, only ordering body and nut, the reference is 0101401G Part1+2.

Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号 IDMUB	G	L1	I1	i	S2	S1	d7	Weight 重量(g) IDMUB
L	315	06	IDMUB06× $\frac{1}{2}$ L	0101401*	M10×1	23	8.5	8	14	14	14	32
	315	08	IDMUB08× $\frac{1}{2}$ L	0101402*	M12×1.5	25	10.0	12	17	17	17	50
	315	10	IDMUB10× $\frac{1}{2}$ L	0101403*	M14×1.5	26	11.0	12	19	19	19	66
	315	10	IDMUB10× $\frac{1}{2}$ L/M12×1.5	0101404*	M12×1.5	26	11.0	12	19	17	17	62
	315	10	IDMUB10× $\frac{1}{2}$ L/M16×1.5	0101405*	M16×1.5	24	12.5	12	19	22	22	77
	315	10	IDMUB10× $\frac{1}{2}$ L/M18×1.5	0101406*	M18×1.5	27	12.5	12	19	24	24	87
	315	10	IDMUB10× $\frac{1}{2}$ L/M22×1.5	0101407*	M22×1.5	29	14.0	14	19	27	27	117
	315	12	IDMUB12× $\frac{1}{2}$ L	0101408*	M16×1.5	27	12.5	12	22	22	22	80
	315	12	IDMUB12× $\frac{1}{2}$ L/M14×1.5	0101409*	M14×1.5	26	11.0	12	22	19	19	79
	315	12	IDMUB12× $\frac{1}{2}$ L/M18×1.5	0101410*	M18×1.5	27	12.5	12	22	24	24	97
	315	12	IDMUB12× $\frac{1}{2}$ L/M22×1.5	0101411*	M22×1.5	29	14.0	14	22	27	27	125
	315	15	IDMUB15× $\frac{1}{2}$ L	0101412*	M18×1.5	29	13.5	12	27	24	24	128
	315	15	IDMUB15× $\frac{1}{2}$ L/M16×1.5	0101413*	M16×1.5	28	13.0	12	27	24	22	126
	315	15	IDMUB15× $\frac{1}{2}$ L/M22×1.5	0101414*	M22×1.5	30	15.0	14	27	27	27	154
	315	18	IDMUB18× $\frac{1}{2}$ L	0101415*	M22×1.5	31	14.5	14	32	27	27	179
	315	18	IDMUB18× $\frac{1}{2}$ L/M18×1.5	0101416*	M18×1.5	30	14.0	12	32	27	24	167
	160	22	IDMUB22× $\frac{1}{2}$ L	0101417*	M26×1.5	33	16.5	16	36	32	32	243
	160	22	IDMUB22× $\frac{1}{2}$ L/M22×1.5	0101418*	M22×1.5	33	16.5	14	36	32	32	237
	160	28	IDMUB28× $\frac{1}{2}$ L	0101419*	M33×2	34	17.5	18	41	41	40	355
	160	35	IDMUB35× $\frac{1}{2}$ L	0101420*	M42×2	39	17.5	20	50	50	50	587
S	160	42	IDMUB42× $\frac{1}{2}$ L	0101421*	M48×2	42	19.0	22	60	55	55	785
	630	06	IDMUB06× $\frac{1}{2}$ S	0101422*	M12×1.5	28	13.0	12	17	17	17	55
	630	06	IDMUB06× $\frac{1}{2}$ S/M14×1.5	0101423*	M14×1.5	30	15.0	12	17	19	19	65
	630	08	IDMUB08× $\frac{1}{2}$ S	0101424*	M14×1.5	30	15.0	12	19	19	19	75
	630	10	IDMUB10× $\frac{1}{2}$ S	0101425*	M16×1.5	31	15.0	12	22	22	22	104
	630	12	IDMUB12× $\frac{1}{2}$ S	0101426*	M18×1.5	33	17.0	12	24	24	24	130
	630	12	IDMUB12× $\frac{1}{2}$ S/M14×1.5	0101427*	M14×1.5	33	16.5	12	24	22	19	121
	630	12	IDMUB12× $\frac{1}{2}$ S/M22×1.5	0101428*	M22×1.5	34	17.5	14	24	27	27	161
	630	14	IDMUB14× $\frac{1}{2}$ S	0101429*	M20×1.5	37	19.0	14	27	27	26	184
	400	16	IDMUB16× $\frac{1}{2}$ S	0101430*	M22×1.5	37	18.5	14	30	27	27	208
	400	16	IDMUB16× $\frac{1}{2}$ S/M18×1.5	0101431*	M18×1.5	36	18.0	12	30	27	24	200
	400	20	IDMUB20× $\frac{1}{2}$ S	0101432*	M27×2	42	20.5	16	36	32	32	342
	400	25	IDMUB25× $\frac{1}{2}$ S	0101433*	M33×2	47	23.0	18	46	41	40	604
	400	30	IDMUB30× $\frac{1}{2}$ S	0101434*	M42×2	50	23.5	20	50	50	50	848
	315	38	IDMUB38× $\frac{1}{2}$ S	0101435*	M48×2	57	26.0	22	60	55	55	1233
	315	50	IDMUB50× $\frac{1}{2}$ S	0101436*	M60×2	72	36.0	24	80	70	70	2250
	315	50	IDMUB50× $\frac{1}{2}$ S/M50×2	0101437*	M50×2	72	36.0	24	80	70	60	2230


*材料: G—碳钢; B—不锈钢。

*Material: G—Carbon steel; B—Stainless steel.

IDMQA

端直接头—公制螺纹带O型密封

Male straight connecting union—Metric thread with O-ring seal

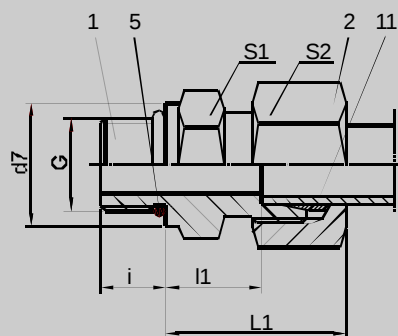

Part1—本体Male body

Part2—螺母Nut

Part5—O形圈O-ring

Part11—卡套Ferrule

IDMQA

订货示例：型号为IDMQA04LL，材料为碳钢，仅供本体和螺母时，订货号为0101501G Part1+2。

Order example: Type is IDMQA04LL, material is carbon steel, only ordering body and nut, the reference is 0101501G Part1+2.

Series 系列	PN	Tube OD 管子外径	Type 型号	Reference 订货号 IDMQA	G	L1	l1	i	S2	S1	d7	Weight 重量(g) IDMQA
LL	100	04	IDMQA04LL	0101501*	M08×1	19.0	9.5	6.5	10	11	10.8	11
	100	04	IDMQA04LL/M10×1	0101502*	M10×1	19.0	9.5	6.5	10	13	12.8	14
	100	06	IDMQA06LL	0101503*	M10×1	19.5	8.0	6.5	12	13	12.8	16
L	315	06	IDMQA06L	0101504*	M10×1	23.0	8.5	8.5	14	14	14.0	26
	315	08	IDMQA08L	0101505*	M12×1.5	25.0	10.0	11.0	17	17	17.0	40
	315	10	IDMQA10L	0101506*	M14×1.5	26.0	11.0	11.0	19	19	19.0	51
	315	12	IDMQA12L	0101507*	M16×1.5	27.0	12.5	11.5	22	22	22.0	72
	315	15	IDMQA15L	0101508*	M18×1.5	29.0	13.5	12.5	27	24	24.0	102
	315	18	IDMQA18L	0101509*	M22×1.5	31.0	14.5	13.0	32	27	27.0	148
	160	22	IDMQA22L	0101510*	M27×2	33.0	16.5	16.0	36	32	32.0	194
	160	28	IDMQA28L	0101511*	M33×2	34.0	17.5	16.0	41	41	41.0	270
	160	35	IDMQA35L	0101512*	M42×2	39.0	17.5	16.0	50	50	50.0	434
	160	42	IDMQA42L	0101513*	M48×2	42.0	19.0	17.5	60	55	55.0	239
S	630	06	IDMQA06S	0101514*	M12×1.5	28.0	13.0	11.0	17	17	17.0	48
	630	08	IDMQA08S	0101515*	M14×1.5	30.0	15.0	11.0	19	19	19.0	64
	630	10	IDMQA10S	0101516*	M16×1.5	31.0	15.0	12.5	22	22	22.0	89
	630	12	IDMQA12S	0101517*	M18×1.5	33.0	17.0	14.0	24	24	24.0	110
	400	16	IDMQA16S	0101518*	M22×1.5	37.0	18.5	15.0	30	27	27.0	165
	400	20	IDMQA20S	0101519*	M27×2	42.0	20.5	18.5	36	32	32.0	271
	400	25	IDMQA25S	0101520*	M33×2	47.0	23.0	18.5	46	41	41.0	490
	400	30	IDMQA30S	0101521*	M42×2	50.0	23.5	19.0	50	50	50.0	650
	315	38	IDMQA38S	0101522*	M48×2	57.0	26.0	21.5	60	55	55.0	361

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.


IDMQB

端直接头—公制螺纹带O型密封

Male straight connecting union—Metric thread with O-ring seal



- Part1—本体Male body
Part2—螺母Nut
Part3—焊接头Welding cone
Part4—O形圈O-ring
Part5—O形圈O-ring

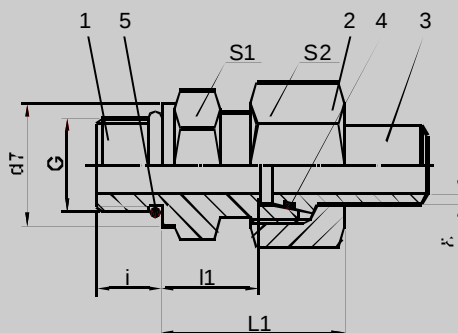

IDMQB

订货示例：型号为IDMQB06× $\frac{1}{2}$ L，材料为碳钢，仅供本体和螺母时，订货号为0101601G Part1+2。

Order example: Type is IDMQB06× $\frac{1}{2}$ L, material is carbon steel, only ordering body and nut, the reference is 0101601G Part1+2.

Series 系列	PN	Tube OD 管子外径	Type 型号	Reference 订货号 IDMQB	G	L1	l1	i	S2	S1	d7	Weight 重量(g) IDMQB
L	315	06	IDMQB06× $\frac{1}{2}$ L	0101601*	M10×1	23.0	8.5	8.5	14	14	14.0	33
	315	08	IDMQB08× $\frac{1}{2}$ L	0101602*	M12×1.5	25.0	10.0	11.0	17	17	17.0	51
	315	10	IDMQB10× $\frac{1}{2}$ L	0101603*	M14×1.5	26.0	11.0	11.0	19	19	19.0	67
	315	12	IDMQB12× $\frac{1}{2}$ L	0101604*	M16×1.5	27.0	12.5	11.5	22	22	22.0	94
	315	15	IDMQB15× $\frac{1}{2}$ L	0101605*	M18×1.5	29.0	13.5	12.5	27	24	24.0	133
	315	18	IDMQB18× $\frac{1}{2}$ L	0101606*	M22×1.5	31.0	14.5	13.0	32	27	27.0	185
	160	22	IDMQB22× $\frac{1}{2}$ L	0101607*	M27×2	33.0	16.5	16.0	36	32	32.0	245
	160	28	IDMQB28× $\frac{1}{2}$ L	0101608*	M33×2	34.0	17.5	16.0	41	41	41.0	358
	160	35	IDMQB35× $\frac{1}{2}$ L	0101609*	M42×2	39.0	17.5	16.0	50	50	50.0	584
	160	42	IDMQB42× $\frac{1}{2}$ L	0101610*	M48×2	42.0	19.0	17.5	60	55	55.0	429
S	630	06	IDMQB06× $\frac{1}{2}$ S	0101611*	M12×1.5	28.0	13.0	11.0	17	17	17.0	55
	630	08	IDMQB08× $\frac{1}{2}$ S	0101612*	M14×1.5	30.0	15.0	11.0	19	19	19.0	75
	630	10	IDMQB10× $\frac{1}{2}$ S	0101613*	M16×1.5	31.0	15.0	12.5	22	22	22.0	105
	630	12	IDMQB12× $\frac{1}{2}$ S	0101614*	M18×1.5	33.0	17.0	14.0	24	24	24.0	132
	400	16	IDMQB16× $\frac{1}{2}$ S	0101615*	M22×1.5	37.0	18.5	15.0	30	27	27.0	206
	400	20	IDMQB20× $\frac{1}{2}$ S	0101616*	M27×2	42.0	20.5	18.5	36	32	32.0	349
	400	25	IDMQB25× $\frac{1}{2}$ S	0101617*	M33×2	47.0	23.0	18.5	46	41	41.0	615
	400	30	IDMQB30× $\frac{1}{2}$ S	0101618*	M42×2	50.0	23.5	19.0	50	50	50.0	838
	315	38	IDMQB38× $\frac{1}{2}$ S	0101619*	M48×2	57.0	26.0	21.5	60	55	55.0	664
	315	50	IDMQB50× $\frac{1}{2}$ S	0101620*	M60×2	72	36	24	80	70	70	2250


*材料: G—碳钢; B—不锈钢。

*Material: G—Carbon steel; B—Stainless steel.

IDGOA IDMOA

端直连接头—带O型密封

Male straight connecting union—with O-ring seal

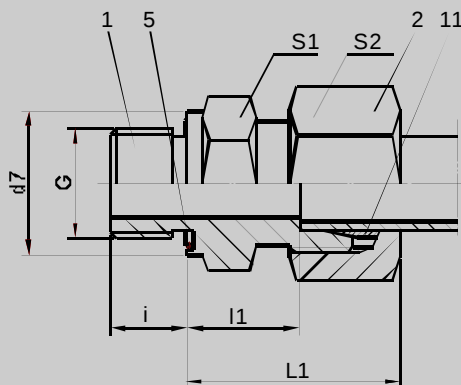

Part1—本体Male body

Part2—螺母Nut

Part5—O形圈O-ring

Part11—卡套Ferrule

IDGOA IDMOA

订货示例：型号为IDGOA10S/G1/4A，材料为碳钢，仅供本体和螺母时，订货号为0101701G Part1+2。

Order example: Type is IDGOA10S/G1/4A, material is carbon steel, only ordering body and nut, the reference is 0101701G Part1+2.

Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号								Weight 重量(g)	
				IDGOA IDMOA	G	L1	I1	i	S2	S1	d7	IDGOA IDMOA	
S	630	10	IDGOA10S/G1/4A	0101701*	G1/4A	31	15	12	22	22	22	79	
	630	10	IDMOA10S/M14×1.5	0101702*	M14×1.5	31	15	12	22	22	22	79	
	630	10	IDGOA10S	0101703*	G3/8A	31	15	12	22	24	24	99	
	630	10	IDMOA10S	0101704*	M16×1.5	31	15	12	22	24	24	99	
	630	12	IDGOA12S	0101705*	G3/8A	33	17	12	24	24	24	103	
	630	12	IDMOA12S	0101706*	M18×1.5	33	17	12	24	24	24	103	
	630	16	IDGOA16S	0101707*	G1/2A	37	18.5	14	30	30	30	165	
	630	16	IDMOA16S	0101708*	M22×1.5	37	18.5	14	30	30	30	165	
	400	20	IDGOA20S	0101709*	G3/4A	42	20.5	16	36	41	40	310	
	400	20	IDMOA20S	0101710*	M27×2	42	20.5	16	36	41	40	310	
	400	25	IDGOA25S	0101711*	G1A	47	23	18	46	46	46	475	
	400	25	IDMOA25S	0101712*	M33×2	47	23	18	46	46	46	475	
	400	30	IDGOA30S	0101713*	G1 1/4A	50	23.5	20	50	55	54	540	
	400	30	IDMOA30S	0101714*	M42×2	50	23.5	20	50	55	54	540	
	315	38	IDGOA38S	0101715*	G1 1/2A	57	26	22	60	60	60	950	
	315	38	IDMOA38S	0101716*	M48×2	57	26	22	60	60	60	950	

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.

上海欧际冶金机械制造有限公司

地址: 上海市宝山区富联路1188号


电话: 021-66047188 66047818 传真: 021-66047588

B17

IDGOB IDMOB

端直通接头—带O型密封

Male straight connecting union—with O-ring seal

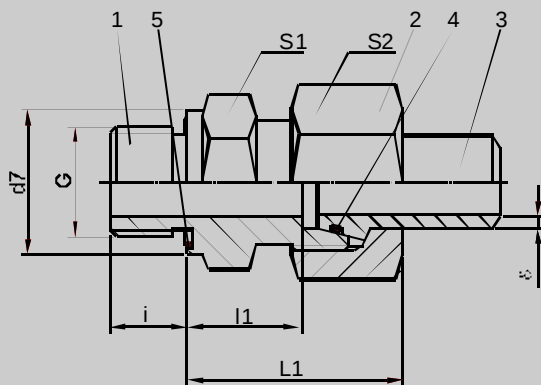

IDGOB IDMOB

Part1—本体 Male body
Part2—螺母 Nut
Part3—焊接头 Welding cone
Part4—O形圈 O-ring
Part5—O形圈 O-ring

订货示例: 型号为IDGOB10× $\frac{1}{4}$ S/G1/4A, 材料为碳钢, 仅供本体和螺母时, 订货号为0101801G Part1+2。
Order example: Type is IDGOB10× $\frac{1}{4}$ S/G1/4A, material is carbon steel, only ordering body and nut, the reference is 0101801G Part1+2.


Series 系列	PN	Tube OD 管子外径	Type 型号	Reference 订货号 IDGOB IDMOB	G	L1	I1	i	S2	S1	d7	Weight 重量(g) IDGOB IDMOB
S	630	10	IDGOB10× $\frac{1}{4}$ S/G1/4A	0101801*	G1/4A	31	15	12	22	22	22	95
	630	10	IDMOB10× $\frac{1}{4}$ S/M14×1.5	0101802*	M14×1.5	31	15	12	22	22	22	95
	630	10	IDGOB10× $\frac{1}{4}$ S	0101803*	G3/8A	31	15	12	22	24	24	105
	630	10	IDMOB10× $\frac{1}{4}$ S	0101804*	M16×1.5	31	15	12	22	24	24	105
	630	12	IDGOB12× $\frac{1}{4}$ S	0101805*	G3/8A	33	17	12	24	24	24	115
	630	12	IDMOB12× $\frac{1}{4}$ S	0101806*	M18×1.5	33	17	12	24	24	24	115
	630	16	IDGOB16× $\frac{1}{4}$ S	0101807*	G1/2A	37	18.5	14	30	30	30	205
	630	16	IDMOB16× $\frac{1}{4}$ S	0101808*	M22×1.5	37	18.5	14	30	30	30	205
	400	20	IDGOB20× $\frac{1}{4}$ S	0101809*	G3/4A	42	20.5	16	36	41	40	380
	400	20	IDMOB20× $\frac{1}{4}$ S	0101810*	M27×2	42	20.5	16	36	41	40	380
	400	25	IDGOB25× $\frac{1}{4}$ S	0101811*	G1A	47	23	18	46	46	46	600
	400	25	IDMOB25× $\frac{1}{4}$ S	0101812*	M33×2	47	23	18	46	46	46	600
	400	30	IDGOB30× $\frac{1}{4}$ S	0101813*	G1 1/4A	50	23.5	20	50	55	54	820
	400	30	IDMOB30× $\frac{1}{4}$ S	0101814*	M42×2	50	23.5	20	50	55	54	820
	315	38	IDGOB38× $\frac{1}{4}$ S	0101815*	G1 1/2A	57	26	22	60	60	60	1240
	315	38	IDMOB38× $\frac{1}{4}$ S	0101816*	M48×2	57	26	22	60	60	60	1240
	315	50	IDGOB50× $\frac{1}{4}$ S	0101817*	G1 3/4A	72	36	24	80	70	68	2180
	315	50	IDMOB50× $\frac{1}{4}$ S	0101818*	M50×2	72	36	24	80	70	68	2180
	315	50	IDGOB50× $\frac{1}{4}$ S	0101819*	G2A	72	36	24	80	75	75	2300
	315	50	IDMOB50× $\frac{1}{4}$ S	0101820*	M60×2	72	30	24	80	75	75	2300

*材料: G—碳钢; B—不锈钢。 *Material: G—Carbon steel; B—Stainless steel.

IDUQA

端直接头—美制螺纹带O型密封

Male straight connecting union—American standard thread with O-ring seal

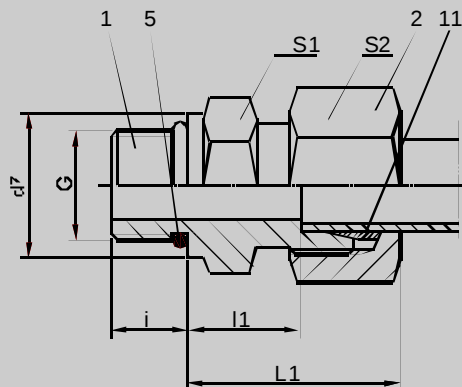

Part1—本体Male body
Part2—螺母Nut
Part5—O形圈O-ring
Part11—卡套Ferrule

IDUQA

订货示例：型号为IDUQA08L7/16UNF，材料为碳钢，仅供本体和螺母时，订货号为0101901G Part1+2。

Order example: Type is IDUQA08L7/16UNF, material is carbon steel, only ordering body and nut, the reference is 0101901G Part1+2.

Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号 IDUQA	G	L1	l1	i	S2	S1	d7	Weight 重量(g) IDUQA
L	315	08	IDUQA08L7/16UNF	0101901*	7/16-20UNF-2A	25	10.0	9.0	17	17	14.4	38
	315	10	IDUQA10L7/16UNF	0101902*	7/16-20UNF-2A	26	11.0	10.0	19	17	14.4	44
	315	12	IDUQA12L9/16UNF	0101903*	9/16-18UNF-2A	26	11.0	10.0	22	19	17.6	58
	315	12	IDUQA12L3/4UNF	0101904*	3/4-16UNF-2A	28	13.0	11.0	22	24	22.3	77
	315	12	IDUQA12L7/8UNF	0101905*	7/8-14UNF-2A	29	14.3	12.7	22	27	25.5	102
	315	15	IDUQA15L3/4UNF	0101906*	3/4-16UNF-2A	29	14.0	11.0	27	24	22.3	100
	315	15	IDUQA15L7/8UNF	0101907*	7/8-14UNF-2A	30	15.3	12.7	27	27	25.5	121
	315	18	IDUQA18L3/4UNF	0101908*	3/4-16UNF-2A	31	14.5	11.0	32	27	22.3	136
	315	18	IDUQA18L7/8UNF	0101909*	7/8-14UNF-2A	31	14.8	12.7	32	27	25.5	142
	160	22	IDUQA22L7/8UNF	0101910*	7/8-14UNF-2A	33	16.8	12.7	36	32	25.5	184
	160	22	IDUQA22L11/16UN	0101911*	11/16-12UN-2A	33	16.5	15.0	36	32	31.9	192
	160	22	IDUQA22L15/16UN	0101912*	15/16-12UN-2A	34	17.5	15.0	36	41	38.2	252
	160	28	IDUQA28L11/16UN	0101913*	11/16-12UN-2A	34	17.5	15.0	41	41	31.9	251
	160	28	IDUQA28L15/16UN	0101914*	15/16-12UN-2A	34	17.5	15.0	41	41	38.2	261
	160	35	IDUQA35L15/16UN	0101915*	15/16-12UN-2A	39	17.5	15.0	50	46	38.2	378
	160	35	IDUQA35L15/8UN	0101916*	15/8-12UN-2A	39	17.5	15.0	50	50	47.7	413
	160	42	IDUQA42L15/8UN	0101917*	15/8-12UN-2A	42	19.0	15.0	60	55	47.7	578
S	630	08	IDUQA08S7/16UNF	0101918*	7/16-20UNF-2A	30	15.0	9.0	19	17	16.0	56
	630	10	IDUQA10S9/16UNF	0101919*	9/16-18UNF-2A	31	14.5	10.0	22	19	17.6	76
	630	12	IDUQA12S9/16UNF	0101920*	9/16-18UNF-2A	31	14.5	10.0	24	22	17.6	88
	630	12	IDUQA12S3/4UNF	0101921*	3/4-16UNF-2A	34	17.5	11.0	24	24	22.3	111
	400	16	IDUQA16S3/4UNF	0101922*	3/4-16UNF-2A	34	15.5	11.0	30	24	22.3	137
	400	16	IDUQA16S7/8UNF	0101923*	7/8-14UNF-2A	37	18.8	12.7	30	27	25.5	1656
	400	20	IDUQA20S3/4UNF	0101924*	3/4-16UNF-2A	42	20.5	11.0	36	32	22.3	246
	400	20	IDUQA20S7/8UNF	0101925*	7/8-14UNF-2A	42	20.8	12.7	36	32	25.5	255
	400	20	IDUQA20S11/16UN	0101926*	11/16-12UN-2A	42	20.5	15.0	36	32	31.9	265
	400	25	IDUQA25S11/16UN	0101927*	11/16-12UN-2A	47	23.0	15.0	46	36	31.9	421
	400	25	IDUQA25S15/16UN	0101928*	15/16-12UN-2A	47	23.0	15.0	46	41	38.2	474
	400	30	IDUQA30S15/16UN	0101929*	15/16-12UN-2A	50	23.5	15.0	50	46	38.2	562

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.

上海欧际冶金机械制造有限公司

地址: 上海市宝山区富联路1188号


电话: 021-66047188 66047818 传真: 021-66047588

B19

IDUQB

端直连接头—美制螺纹带O型密封

Male straight connecting union—American standard thread with O-ring seal

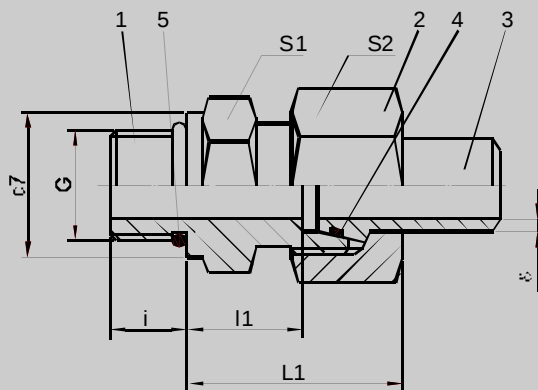

- Part1—本体 Male body
- Part2—螺母 Nut
- Part3—焊接头 Welding cone
- Part4—O形圈 O-ring
- Part5—O形圈 O-ring

IDUQB

订货示例: 型号为IDUQB08× $\frac{1}{2}$ L7/16UNF, 材料为碳钢, 仅供本体和螺母时, 订货号为0102001G Part1+2。
Order example: Type is IDUQB08× $\frac{1}{2}$ L7/16UNF, material is carbon steel, only ordering body and nut, the reference is 0102001G Part1+2.


Series 系列	PN	Tube OD 管子外径	Type 型号	Reference 订货号 IDUQB	G	L1	I1	i	S2	S1	d7	Weight 重量(g) IDUQB
L	315	08	IDUQB08× $\frac{1}{2}$ L7/16UNF	0102001*	7/16-20UNF-2A	25	10.0	9.0	17	17	14.4	49
	315	10	IDUQB10× $\frac{1}{2}$ L7/16UNF	0102002*	7/16-20UNF-2A	26	11.0	10.0	19	17	14.4	60
	315	12	IDUQB12× $\frac{1}{2}$ L9/16UNF	0102003*	9/16-18UNF-2A	26	11.0	10.0	22	19	17.6	80
	315	12	IDUQB12× $\frac{1}{2}$ L3/4UNF	0102004*	3/4-16UNF-2A	28	13.0	11.0	22	24	22.3	99
	315	12	IDUQB12× $\frac{1}{2}$ L7/8UNF	0102005*	7/8-14UNF-2A	29	14.3	12.7	22	27	25.5	124
	315	15	IDUQB15× $\frac{1}{2}$ L3/4UNF	0102006*	3/4-16UNF-2A	29	14.0	11.0	27	24	22.3	131
	315	15	IDUQB15× $\frac{1}{2}$ L7/8UNF	0102007*	7/8-14UNF-2A	30	15.3	12.7	27	27	25.5	152
	315	18	IDUQB18× $\frac{1}{2}$ L3/4UNF	0102008*	3/4-16UNF-2A	31	14.5	11.0	32	27	22.3	173
	315	18	IDUQB18× $\frac{1}{2}$ L7/8UNF	0102009*	7/8-14UNF-2A	31	14.8	12.7	32	27	25.5	179
	160	22	IDUQB22× $\frac{1}{2}$ L7/8UNF	0102010*	7/8-14UNF-2A	33	16.8	12.7	36	32	25.5	235
	160	22	IDUQB22× $\frac{1}{2}$ L11/16UN	0102011*	11/16-12UN-2A	33	16.5	15.0	36	32	31.9	243
	160	22	IDUQB22× $\frac{1}{2}$ L15/16UN	0102012*	15/16-12UN-2A	34	17.5	15.0	36	41	38.2	303
	160	28	IDUQB28× $\frac{1}{2}$ L11/16UN	0102013*	11/16-12UN-2A	34	17.5	15.0	41	41	31.9	339
	160	28	IDUQB28× $\frac{1}{2}$ L15/16UN	0102014*	15/16-12UN-2A	34	17.5	15.0	41	41	38.2	349
	160	35	IDUQB35× $\frac{1}{2}$ L15/16UN	0102015*	15/16-12UN-2A	39	17.5	15.0	50	46	38.2	528
S	160	35	IDUQB35× $\frac{1}{2}$ L15/8UN	0102016*	15/8-12UN-2A	39	17.5	15.0	50	50	47.7	563
	160	42	IDUQB42× $\frac{1}{2}$ L15/8UN	0102017*	15/8-12UN-2A	42	19.0	15.0	60	55	47.7	768
	630	08	IDUQB08× $\frac{1}{2}$ S7/16UNF	0102018*	7/16-20UNF-2A	30	15.0	9.0	19	17	16.0	67
	630	10	IDUQB10× $\frac{1}{2}$ S9/16UNF	0102019*	9/16-18UNF-2A	31	14.5	10.0	22	19	17.6	92
	630	12	IDUQB12× $\frac{1}{2}$ S9/16UNF	0102020*	9/16-18UNF-2A	31	14.5	10.0	24	22	17.6	110
	630	12	IDUQB12× $\frac{1}{2}$ S3/4UNF	0102021*	3/4-16UNF-2A	34	17.5	11.0	24	24	22.3	133
	400	16	IDUQB16× $\frac{1}{2}$ S3/4UNF	0102022*	3/4-16UNF-2A	34	15.5	11.0	30	24	22.3	178
	400	16	IDUQB16× $\frac{1}{2}$ S7/8UNF	0102023*	7/8-14UNF-2A	37	18.8	12.7	30	27	25.5	207
	400	20	IDUQB20× $\frac{1}{2}$ S3/4UNF	0102024*	3/4-16UNF-2A	42	20.5	11.0	36	32	22.3	324
	400	20	IDUQB20× $\frac{1}{2}$ S7/8UNF	0102025*	7/8-14UNF-2A	42	20.8	12.7	36	32	25.5	333
	400	20	IDUQB20× $\frac{1}{2}$ S11/16UN	0102026*	11/16-12UN-2A	42	20.5	15.0	36	32	31.9	343
	400	25	IDUQB25× $\frac{1}{2}$ S11/16UN	0102027*	11/16-12UN-2A	47	23.0	15.0	46	36	31.9	546
	400	25	IDUQB25× $\frac{1}{2}$ S15/16UN	0102028*	15/16-12UN-2A	47	23.0	15.0	46	41	38.2	599
	400	30	IDUQB30× $\frac{1}{2}$ S15/16UN	0102029*	15/16-12UN-2A	50	23.5	15.0	50	46	38.2	750
	400	30	IDUQB30× $\frac{1}{2}$ S15/8UN	0102030*	15/8-12UN-2A	50	23.5	15.0	50	50	47.7	823
	315	38	IDUQB38× $\frac{1}{2}$ S15/8UN	0102031*	15/8-12UN-2A	57	26.0	15.0	60	55	47.7	1220
	315	50	IDUQB50× $\frac{1}{2}$ S5/2UN	0102032*	5/2-12UN-2A	72	36	17.0	80	70	68	2230

*材料: G—碳钢; B—不锈钢。 *Material: G—Carbon steel; B—Stainless steel.

IDGJA

端直接头—英制螺纹带金属密封垫

Male straight connecting union—British standard thread with metal seal

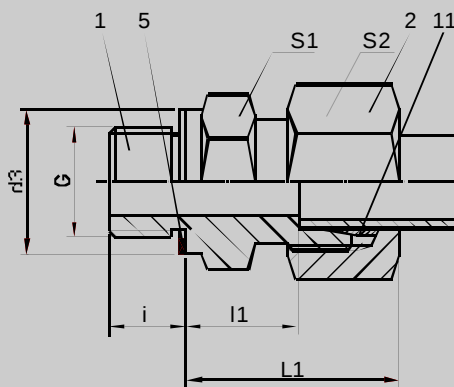

IDGJA

- Part1—本体Male body
Part2—螺母Nut
Part5—金属垫Metal seal
Part11—卡套Ferrule

订货示例：型号为IDGJA06L，材料为碳钢，仅供本体和螺母时，订货号为0102101G Part1+2。

Order example: Type is IDGJA06L, material is carbon steel, only ordering body and nut, the reference is 0102101G Part1+2.

Series 系列	PN	Tube OD 管子外径	Type 型号	Reference 订货号 IDGJA	G	L1	l1	i	S2	S1	d3	Weight 重量(g) IDGJA
L	315	06	IDGJA06L	0102101*	G1/8A	23.0	8.5	8	14	14	14	25
	315	06	IDGJA06L/G1/4A	0102102*	G1/4A	25.0	10.0	12	14	19	18	40
	315	06	IDGJA06L/G3/8A	0102103*	G3/8A	26.0	11.5	12	14	22	22	57
	315	06	IDGJA06L/G1/2A	0102104*	G1/2A	27.0	12.0	14	14	27	26	72
	315	08	IDGJA08L	0102105*	G1/4A	25.0	10.0	12	17	19	18	44
	315	08	IDGJA08L/G1/8A	0102106*	G1/8A	23.0	8.5	8	17	14	14	33
	315	08	IDGJA08L/G3/8A	0102107*	G3/8A	26.0	11.5	12	17	22	22	62
	315	08	IDGJA08L/G1/2A	0102108*	G1/2A	27.0	12.0	14	17	27	26	91
	315	10	IDGJA10L	0102109*	G1/4A	26.0	11.0	12	19	19	18	49
	315	10	IDGJA10L/G1/8A	0102110*	G1/8A	25.0	10.5	8	19	17	14	42
	315	10	IDGJA10L/G3/8A	0102111*	G3/8A	27.0	12.5	12	19	22	22	65
	315	10	IDGJA10L/G1/2A	0102112*	G1/2A	28.0	13.0	14	19	27	26	93
	315	12	IDGJA12L	0102113*	G3/8A	27.0	12.5	12	22	22	22	71
	315	12	IDGJA12L/G1/8A	0102114*	G1/8A	26.0	11.5	8	22	19	14	56
	315	12	IDGJA12L/G1/4A	0102115*	G1/4A	27.0	12.0	12	22	19	18	59
	315	12	IDGJA12L/G1/2A	0102116*	G1/2A	28.0	13.0	14	22	27	26	96
	315	12	IDGJA12L/G3/4A	0102117*	G3/4A	29.0	14.0	16	22	32	32	148
	250	15	IDGJA15L	0102118*	G1/2A	29.0	14.0	14	27	27	26	119
	250	15	IDGJA15L/G3/8A	0102119*	G3/8A	29.0	13.5	12	27	24	22	99
	250	15	IDGJA15L/G3/4A	0102120*	G3/4A	30.0	15.0	16	27	32	32	164
	250	18	IDGJA18L	0102121*	G1/2A	31.0	14.5	14	32	27	26	139
	250	18	IDGJA18L/G3/8A	0102122*	G3/8A	29.5	14.0	12	32	27	22	137
	250	18	IDGJA18L/G3/4A	0102123*	G3/4A	30.0	14.5	16	32	32	32	178
	160	22	IDGJA22L	0102124*	G3/4A	33.0	16.5	16	36	32	32	192
	160	22	IDGJA22L/G1/2A	0102125*	G1/2A	33.0	16.5	14	36	32	26	180
	160	22	IDGJA22L/G1A	0102126*	G1A	33.5	17.5	18	36	41	39	273
	160	28	IDGJA28L	0102127*	G1A	34.0	17.5	18	41	41	39	266
	160	28	IDGJA28L/G1/2A	0102128*	G1/2A	34.0	17.5	14	41	41	26	239
	160	28	IDGJA28L/G3/4A	0102129*	G3/4A	34.0	17.5	16	41	41	32	254
	160	28	IDGJA28L/G11/4A	0102130*	G11/4A	35.0	18.3	20	41	50	50	414
	160	35	IDGJA35L/G1/2A	0102131*	G1/2A	39.0	17.5	14	50	46	26	290
	160	35	IDGJA35L/G3/4A	0102132*	G3/4A	39.0	17.5	16	50	46	32	320
	160	35	IDGJA35L/G1A	0102133*	G1A	39.0	17.5	18	50	46	39	390
	160	35	IDGJA35L	0102134*	G11/4A	39.0	17.5	20	50	50	49	432
	160	35	IDGJA35L/G11/2A	0102135*	G11/2A	41.0	19.5	22	50	55	55	532
	160	42	IDGJA42L	0102136*	G11/2A	42.0	19.0	22	60	55	55	588
	160	42	IDGJA42L/G1A	0102137*	G1A	42.0	19.0	18	60	55	39	580
	160	42	IDGJA42L/G11/4A	0102138*	G11/4A	41.5	19.0	20	60	55	49	575

*材料：G—碳钢；B—不锈钢；T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.

上海欧际冶金机械制造有限公司

地址：上海市宝山区富联路1188号


电话：021-66047188 66047818 传真：021-66047588

B21

IDGJA

端直接头—英制螺纹带金属密封垫

Male straight connecting union—British standard thread with metal seal

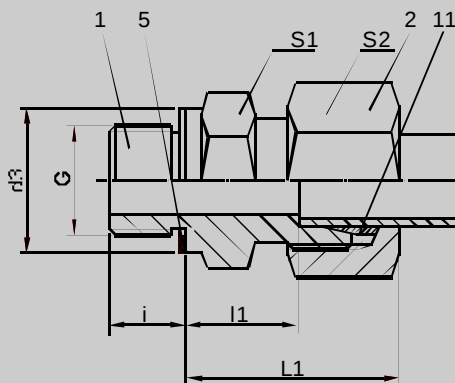

Part1—本体Male body
Part2—螺母Nut
Part5—金属垫Metal seal
Part11—卡套Ferrule

IDGJA

订货示例：型号为IDGJA06S，材料为碳钢，仅供本体和螺母时，订货号为0102201G Part1+2。

Order example: Type is IDGJA06S, material is carbon steel, only ordering body and nut, the reference is 0102201G Part1+2.

Series 系列	PN	Tube OD 管子外径	Type 型号	Reference 订货号 IDGJA	G	L1	l1	i	S2	S1	d3	Weight 重量(g) IDGJA
S	400	06	IDGJA06S	0102201*	G1/4A	28.0	13.0	12	17	19	18	54
	400	06	IDGJA06S/G1/8A	0102202*	G1/8A	27.0	12.5	8	17	14	14	41
	400	06	IDGJA06S/G3/8A	0102203*	G3/8A	30.0	15.5	12	17	22	22	76
	400	06	IDGJA06S/G1/2A	0102204*	G1/2A	33.0	18.0	14	17	27	26	102
	400	08	IDGJA08S	0102205*	G1/4A	30.0	15.0	12	19	19	18	63
	400	08	IDGJA08S/G3/8A	0102206*	G3/8A	30.0	15.5	12	19	22	22	81
	400	08	IDGJA08S/G1/2A	0102207*	G1/2A	33.0	18.0	14	19	27	26	122
	400	10	IDGJA10S	0102208*	G3/8A	31.0	15.0	12	22	22	22	90
	400	10	IDGJA10S/G1/4A	0102209*	G1/4A	31.0	14.5	12	22	19	18	77
	400	10	IDGJA10S/G1/2A	0102210*	G1/2A	34.0	17.5	14	22	27	26	131
	400	12	IDGJA12S	0102211*	G3/8A	33.0	17.0	12	24	22	22	100
	400	12	IDGJA12S/G1/4A	0102212*	G1/4A	33.0	16.5	12	24	22	18	94
	400	12	IDGJA12S/G1/2A	0102213*	G1/2A	34.0	17.5	14	24	27	26	134
	400	14	IDGJA14S	0102214*	G1/2A	37.0	19.0	14	27	27	26	154
	400	14	IDGJA14S/G3/8A	0102215*	G3/8A	36.0	18.5	12	27	24	22	131
	400	16	IDGJA16S	0102216*	G1/2A	37.0	18.5	14	30	27	26	163
	400	16	IDGJA16S/G3/8A	0102217*	G3/8A	36.0	18.0	12	30	27	22	154
	400	16	IDGJA16S/G3/4A	0102218*	G3/4A	39.0	20.5	16	30	32	32	228
	400	20	IDGJA20S	0102219*	G3/4A	42.0	20.5	16	36	32	32	264
	400	20	IDGJA20S/G1/2A	0102220*	G1/2A	42.0	20.5	14	36	32	26	256
	250	20	IDGJA20S/G1A	0102221*	G1A	44.0	22.5	18	36	41	39	387
	160	20	IDGJA20S/G11/4A	0102222*	G11/4A	44.0	22.5	20	36	50	49	460
	250	25	IDGJA25S	0102223*	G1A	47.0	23.0	18	46	41	39	483
	250	25	IDGJA25S/G3/4A	0102224*	G3/4A	47.0	23.0	16	46	41	32	461
	160	25	IDGJA25S/G11/4A	0102225*	G11/4A	47.0	23.0	20	46	50	49	550
	160	30	IDGJA30S	0102226*	G11/4A	50.0	23.5	20	50	50	49	660
	160	30	IDGJA30S/G1A	0102227*	G1A	50.0	23.5	18	50	46	39	575
	160	38	IDGJA38S	0102228*	G11/2A	57.0	26.0	22	60	55	55	921
	160	38	IDGJA38S/G11/4A	0102229*	G11/4A	57.0	26.0	20	60	55	49	939

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.


IDGJB

端直通接头—英制螺纹带金属密封垫

Male straight connecting union—British standard thread with metal seal



- Part1—本体Male body
Part2—螺母Nut
Part3—焊接头Welding cone
Part4—O形圈O-ring
Part5—金属垫Metal seal

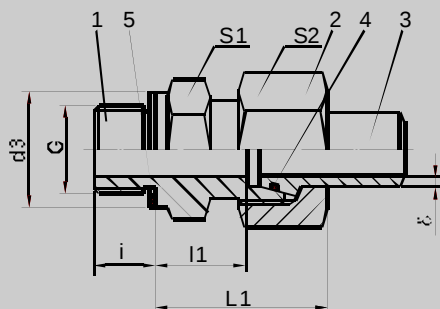

IDGJB

订货示例：型号为IDGJB06× $\frac{1}{2}$ L，材料为碳钢，仅供本体和螺母时，订货号为0102301G Part1+2。

Order example: Type is IDGJB06× $\frac{1}{2}$ L, material is carbon steel, only ordering body and nut, the reference is 0102301G Part1+2.

Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号 IDGJB	G	L1	l1	i	S2	S1	d3	Weight 重量(g) IDGJB
L	315	06	IDGJB06× $\frac{1}{2}$ L	0102301*	G1/8A	23.0	8.5	8	14	14	14	32
	315	06	IDGJB06× $\frac{1}{2}$ L/G1/4A	0102302*	G1/4A	25.0	10.0	12	14	19	18	47
	315	06	IDGJB06× $\frac{1}{2}$ L/G3/8A	0102303*	G3/8A	26.0	11.5	12	14	22	22	54
	315	06	IDGJB06× $\frac{1}{2}$ L/G1/2A	0102304*	G1/2A	27.0	12.0	14	14	27	26	79
	315	08	IDGJB08× $\frac{1}{2}$ L	0102305*	G1/4A	25.0	10.0	12	17	19	18	55
	315	08	IDGJB08× $\frac{1}{2}$ L/G1/8A	0102306*	G1/8A	23.0	8.5	8	17	14	14	44
	315	08	IDGJB08× $\frac{1}{2}$ L/G3/8A	0102307*	G3/8A	26.0	11.5	12	17	22	22	73
	315	08	IDGJB08× $\frac{1}{2}$ L/G1/2A	0102308*	G1/2A	27.0	12.0	14	17	27	26	102
	315	10	IDGJB10× $\frac{1}{2}$ L	0102309*	G1/4A	26.0	11.0	12	19	19	18	65
	315	10	IDGJB10× $\frac{1}{2}$ L/G1/8A	0102310*	G1/8A	25.0	10.5	8	19	17	14	58
	315	10	IDGJB10× $\frac{1}{2}$ L/G3/8A	0102311*	G3/8A	27.0	12.5	12	19	22	22	81
	315	10	IDGJB10× $\frac{1}{2}$ L/G1/2A	0102312*	G1/2A	28.0	13.0	14	19	27	26	109
	315	12	IDGJB12× $\frac{1}{2}$ L	0102313*	G3/8A	27.0	12.5	12	22	22	22	93
	315	12	IDGJB12× $\frac{1}{2}$ L/G1/8A	0102314*	G1/8A	26.0	11.5	8	22	19	14	78
	315	12	IDGJB12× $\frac{1}{2}$ L/G1/4A	0102315*	G1/4A	27.0	12.0	12	22	19	18	81
	315	12	IDGJB12× $\frac{1}{2}$ L/G1/2A	0102316*	G1/2A	28.0	13.0	14	22	27	26	118
	315	12	IDGJB12× $\frac{1}{2}$ L/G3/4A	0102317*	G3/4A	29.0	14.0	16	22	32	32	170
	250	15	IDGJB15× $\frac{1}{2}$ L	0102318*	G1/2A	29.0	14.0	14	27	27	26	150
	250	15	IDGJB15× $\frac{1}{2}$ L/G3/8A	0102319*	G3/8A	29.0	13.5	12	27	24	22	130
	250	15	IDGJB15× $\frac{1}{2}$ L/G3/4A	0102320*	G3/4A	30.0	15.0	16	27	32	32	195
	250	18	IDGJB18× $\frac{1}{2}$ L	0102321*	G1/2A	31.0	14.5	14	32	27	26	176
	250	18	IDGJB18× $\frac{1}{2}$ L/G3/8A	0102322*	G3/8A	29.5	14.0	12	32	27	22	174
	250	18	IDGJB18× $\frac{1}{2}$ L/G3/4A	0102323*	G3/4A	30.0	14.5	16	32	32	32	215
	160	22	IDGJB22× $\frac{1}{2}$ L	0102324*	G3/4A	33.0	16.5	16	36	32	32	243
	160	22	IDGJB22× $\frac{1}{2}$ L/G1/2A	0102325*	G1/2A	33.0	16.5	14	36	32	26	231
	160	22	IDGJB22× $\frac{1}{2}$ L/G1A	0102326*	G1A	33.5	17.5	18	36	41	39	324
	160	28	IDGJB28× $\frac{1}{2}$ L	0102327*	G1A	34.0	17.5	18	41	41	39	354
	160	28	IDGJB28× $\frac{1}{2}$ L/G1/2A	0102328*	G1/2A	34.0	17.5	14	41	41	26	327
	160	28	IDGJB28× $\frac{1}{2}$ L/G3/4A	0102329*	G3/4A	34.0	17.5	16	41	41	32	342
	160	28	IDGJB28× $\frac{1}{2}$ L/G11/4A	0102330*	G11/4A	35.0	18.3	20	41	50	50	502
	160	35	IDGJB35× $\frac{1}{2}$ L/G1/2A	0102331*	G1/2A	39.0	17.5	14	50	46	26	440
	160	35	IDGJB35× $\frac{1}{2}$ L/G3/4A	0102332*	G3/4A	39.0	17.5	16	50	46	32	470
	160	35	IDGJB35× $\frac{1}{2}$ L/G1A	0102333*	G1A	39.0	17.5	18	50	46	39	470
	160	35	IDGJB35× $\frac{1}{2}$ L	0102334*	G11/4A	39.0	17.5	20	50	50	49	582
	160	35	IDGJB35× $\frac{1}{2}$ L/G11/2A	0102335*	G11/2A	41.0	19.5	22	50	55	55	682
	160	42	IDGJB42× $\frac{1}{2}$ L	0102336*	G11/2A	42.0	19.0	22	60	55	55	778
	160	42	IDGJB42× $\frac{1}{2}$ L/G1A	0102337*	G1A	42.0	19.0	18	60	55	39	770
	160	42	IDGJB42× $\frac{1}{2}$ L/G11/4A	0102338*	G11/4A	41.5	19.0	20	60	55	49	765

*材料：G—碳钢；B—不锈钢。

*Material: G—Carbon steel; B—Stainless steel.

上海欧际冶金机械制造有限公司

地址：上海市宝山区富联路1188号


电话：021-66047188 66047818 传真：021-66047588

B23

IDGJB

端直接头—英制螺纹带金属密封垫

Male straight connecting union—British standard thread with metal seal

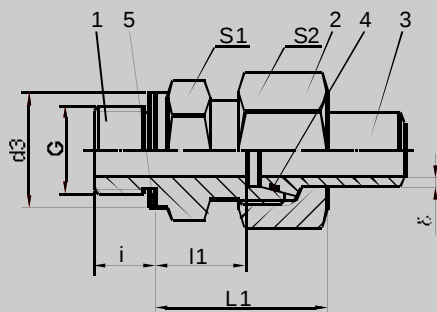

- Part1—本体Male body
Part2—螺母Nut
Part3—焊接头Welding cone
Part4—O形圈O-ring
Part5—金属垫Metal seal

IDGJB

订货示例：型号为IDGJB06× $\frac{1}{8}$ S，材料为碳钢，仅供本体和螺母时，订货号为0102401G Part1+2。
Order example: Type is IDGJB06× $\frac{1}{8}$ S, material is carbon steel, only ordering body and nut, the reference is 0102401G Part1+2.


Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号	G	L1	l1	i	S2	S1	d3	Weight 重量(g)
				IDGJB								IDGJB
S	400	06	IDGJB06× 8 S	0102401*	G1/4A	28.0	13.0	12	17	19	18	61
	400	06	IDGJB06× 8 S/G1/8A	0102402*	G1/8A	27.0	12.5	8	17	14	14	48
	400	06	IDGJB06× 8 S/G3/8A	0102403*	G3/8A	30.0	15.5	12	17	22	22	83
	400	06	IDGJB06× 8 S/G1/2A	0102404*	G1/2A	33.0	18.0	14	17	27	26	109
	400	08	IDGJB08× 8 S	0102405*	G1/4A	30.0	15.0	12	19	19	18	74
	400	08	IDGJB08× 8 S/G3/8A	0102406*	G3/8A	30.0	15.5	12	19	22	22	92
	400	08	IDGJB08× 8 S/G1/2A	0102407*	G1/2A	33.0	18.0	14	19	27	26	133
	400	10	IDGJB10× 8 S	0102408*	G3/8A	31.0	15.0	12	22	22	22	106
	400	10	IDGJB10× 8 S/G1/4A	0102409*	G1/4A	31.0	14.5	12	22	19	18	93
	400	10	IDGJB10× 8 S/G1/2A	0102410*	G1/2A	34.0	17.5	14	22	27	26	147
	400	12	IDGJB12× 8 S	0102411*	G3/8A	33.0	17.0	12	24	22	22	122
	400	12	IDGJB12× 8 S/G1/4A	0102412*	G1/4A	33.0	16.5	12	24	22	18	116
	400	12	IDGJB12× 8 S/G1/2A	0102413*	G1/2A	34.0	17.5	14	24	27	26	156
	400	14	IDGJB14× 8 S	0102414*	G1/2A	37.0	19.0	14	27	27	26	187
	400	14	IDGJB14× 8 S/G3/8A	0102415*	G3/8A	36.0	18.5	12	27	24	22	164
	400	16	IDGJB16× 8 S	0102416*	G1/2A	37.0	18.5	14	30	27	26	204
	400	16	IDGJB16× 8 S/G3/8A	0102417*	G3/8A	36.0	18.0	12	30	27	22	195
	400	16	IDGJB16× 8 S/G3/4A	0102418*	G3/4A	39.0	20.5	16	30	32	32	269
	400	20	IDGJB20× 8 S	0102419*	G3/4A	42.0	20.5	16	36	32	32	342
	400	20	IDGJB20× 8 S/G1/2A	0102420*	G1/2A	42.0	20.5	14	36	32	26	334
	250	20	IDGJB20× 8 S/G1	0102421*	G1A	44.0	22.5	18	36	41	39	465
	160	20	IDGJB20× 8 S/G11/4A	0102422*	G11/4A	44.0	22.5	20	36	50	49	538
	250	25	IDGJB25× 8 S	0102423*	G1A	47.0	23.0	18	46	41	39	608
	250	25	IDGJB25× 8 S/G3/4A	0102424*	G3/4A	47.0	23.0	16	46	41	32	586
	160	25	IDGJB25× 8 S/G11/4A	0102425*	G11/4A	47.0	23.0	20	46	50	49	675
	160	30	IDGJB30× 8 S	0102426*	G11/4A	50.0	23.5	20	50	50	49	848
	160	30	IDGJB30× 8 S/G1A	0102427*	G1A	50.0	23.5	18	50	46	39	763
	160	38	IDGJB38× 8 S	0102428*	G11/2A	57.0	26.0	22	60	55	55	1224
	160	38	IDGJB38× 8 S/G11/4A	0102429*	G11/4A	57.0	26.0	20	60	55	49	1129

*材料：G—碳钢；B—不锈钢。 *Material: G—Carbon steel; B—Stainless steel.

IDGLA

端直通过接头—英制螺纹棱角密封

Male straight connecting union—British standard thread with edge seal

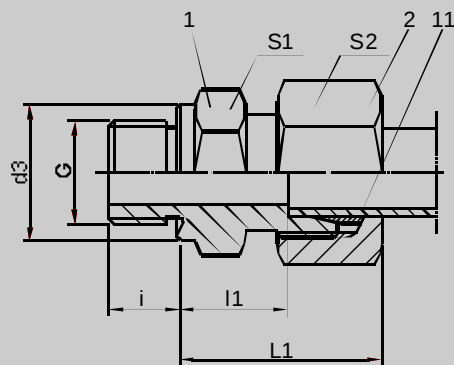

Part1—本体Male body

Part2—螺母Nut

Part11—卡套Ferrule

IDGLA

订货示例：型号为IDGLA06L，材料为碳钢，仅供本体和螺母时，订货号为0102501G Part1+2。

Order example: Type is IDGLA06L, material is carbon steel, only ordering body and nut, the reference is 0102501G Part1+2.

Series 系列	PN	Tube OD 管子外径	Type 型号	Reference 订货号 IDGLA	G	L1	l1	i	S2	S1	d3	Weight 重量(g) IDGLA
L	315	06	IDGLA06L	0102501*	G1/8A	23.0	8.5	8	14	14	14	25
	315	06	IDGLA06L/G1/4A	0102502*	G1/4A	25.0	10.0	12	14	19	18	40
	315	06	IDGLA06L/G3/8A	0102503*	G3/8A	26.0	11.5	12	14	22	22	57
	315	06	IDGLA06L/G1/2A	0102504*	G1/2A	27.0	12.0	14	14	27	26	72
	315	08	IDGLA08L	0102505*	G1/4A	25.0	10.0	12	17	19	18	44
	315	08	IDGLA08L/G1/8A	0102506*	G1/8A	23.0	8.5	8	17	14	14	33
	315	08	IDGLA08L/G3/8A	0102507*	G3/8A	26.0	11.5	12	17	22	22	62
	315	08	IDGLA08L/G1/2A	0102508*	G1/2A	27.0	12.0	14	17	27	26	91
	315	10	IDGLA10L	0102509*	G1/4A	26.0	11.0	12	19	19	18	49
	315	10	IDGLA10L/G1/8A	0102510*	G1/8A	25.0	10.5	8	19	17	14	42
	315	10	IDGLA10L/G3/8A	0102511*	G3/8A	27.0	12.5	12	19	22	22	65
	315	10	IDGLA10L/G1/2A	0102512*	G1/2A	28.0	13.0	14	19	27	26	93
	315	12	IDGLA12L	0102513*	G3/8A	27.0	12.5	12	22	22	22	71
	315	12	IDGLA12L/G1/8A	0102514*	G1/8A	26.0	11.5	8	22	19	14	56
	315	12	IDGLA12L/G1/4A	0102515*	G1/4A	27.0	12.0	12	22	19	18	59
	315	12	IDGLA12L/G1/2A	0102516*	G1/2A	28.0	13.0	14	22	27	26	96
	315	12	IDGLA12L/G3/4A	0102517*	G3/4A	29.0	14.0	16	22	32	32	148
	250	15	IDGLA15L	0102518*	G1/2A	29.0	14.0	14	27	27	26	119
	250	15	IDGLA15L/G3/8A	0102519*	G3/8A	29.0	13.5	12	27	24	22	99
	250	15	IDGLA15L/G3/4A	0102520*	G3/4A	30.0	15.0	16	27	32	32	164
	250	18	IDGLA18L	0102521*	G1/2A	31.0	14.5	14	32	27	26	139
	250	18	IDGLA18L/G3/8A	0102522*	G3/8A	29.5	14.0	12	32	27	22	137
	250	18	IDGLA18L/G3/4A	0102523*	G3/4A	30.0	14.5	16	32	32	32	178
	160	22	IDGLA22L	0102524*	G3/4A	33.0	16.5	16	36	32	32	192
	160	22	IDGLA22L/G1/2A	0102525*	G1/2A	33.0	16.5	14	36	32	26	180
	160	22	IDGLA22L/G1A	0102526*	G1A	33.5	17.5	18	36	41	39	273
	160	28	IDGLA28L	0102527*	G1A	34.0	17.5	18	41	41	39	266
	160	28	IDGLA28L/G1/2A	0102528*	G1/2A	34.0	17.5	14	41	41	26	239
	160	28	IDGLA28L/G3/4A	0102529*	G3/4A	34.0	17.5	16	41	41	32	254
	160	28	IDGLA28L/G11/4A	0102530*	G11/4A	35.0	18.3	20	41	50	50	414
	160	35	IDGLA35L/G1/2A	0102531*	G1/2A	39.0	17.5	14	50	46	26	290
	160	35	IDGLA35L/G3/4A	0102532*	G3/4A	39.0	17.5	16	50	46	32	320
	160	35	IDGLA35L/G1A	0102533*	G1A	39.0	17.5	18	50	46	39	390
	160	35	IDGLA35L	0102534*	G11/4A	39.0	17.5	20	50	50	49	432
	160	35	IDGLA35L/G11/2A	0102535*	G11/2A	41.0	19.5	22	50	55	55	532
	160	42	IDGLA42L	0102536*	G11/2A	42.0	19.0	22	60	55	55	588
	160	42	IDGLA42L/G1A	0102537*	G1A	42.0	19.0	18	60	55	39	580
	160	42	IDGLA42L/G11/4A	0102538*	G11/4A	41.5	19.0	20	60	55	49	575

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.

上海欧际冶金机械制造有限公司

地址: 上海市宝山区富联路1188号


电话: 021-66047188 66047818 传真: 021-66047588

B25

IDGLA

端直接头—英制螺纹棱角密封

Male straight connecting union—British standard thread with edge seal

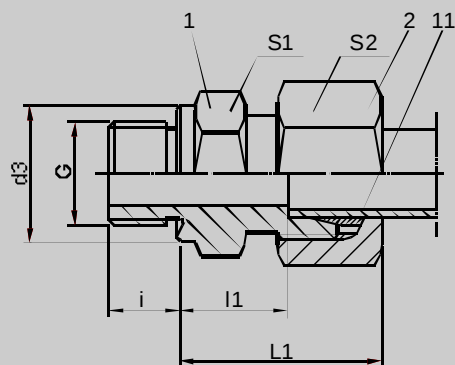

Part1—本体Male body

Part2—螺母Nut

Part11—卡套Ferrule

IDGLA

订货示例：型号为IDGLA06S，材料为碳钢，仅供本体和螺母时，订货号为0102601G Part1+2。

Order example: Type is IDGLA06S, material is carbon steel, only ordering body and nut, the reference is 0102601G Part1+2.


Series 系列	PN	Tube OD 管子外径	Type 型号	Reference 订货号 IDGLA	G	L1	l1	i	S2	S1	d3	Weight 重量(g) IDGLA
S	400	06	IDGLA06S	0102601*	G1/4A	28.0	13.0	12	17	19	18	54
	400	06	IDGLA06S/G1/8A	0102602*	G1/8A	27.0	12.5	8	17	14	14	41
	400	06	IDGLA06S/G3/8A	0102603*	G3/8A	30.0	15.5	12	17	22	22	76
	400	06	IDGLA06S/G1/2A	0102604*	G1/2A	33.0	18.0	14	17	27	26	102
	400	08	IDGLA08S	0102605*	G1/4A	30.0	15.0	12	19	19	18	63
	400	08	IDGLA08S/G3/8A	0102606*	G3/8A	30.0	15.5	12	19	22	22	81
	400	08	IDGLA08S/G1/2A	0102607*	G1/2A	33.0	18.0	14	19	27	26	122
	400	10	IDGLA10S	0102608*	G3/8A	31.0	15.0	12	22	22	22	90
	400	10	IDGLA10S/G1/4A	0102609*	G1/4A	31.0	14.5	12	22	19	18	77
	400	10	IDGLA10S/G1/2A	0102610*	G1/2A	34.0	17.5	14	22	27	26	131
	400	12	IDGLA12S	0102611*	G3/8A	33.0	17.0	12	24	22	22	100
	400	12	IDGLA12S/G1/4A	0102612*	G1/4A	33.0	16.5	12	24	22	18	94
	400	12	IDGLA12S/G1/2A	0102613*	G1/2A	34.0	17.5	14	24	27	26	134
	400	14	IDGLA14S	0102614*	G1/2A	37.0	19.0	14	27	27	26	154
	400	14	IDGLA14S/G3/8A	0102615*	G3/8A	36.0	18.5	12	27	24	22	131
	400	16	IDGLA16S	0102616*	G1/2A	37.0	18.5	14	30	27	26	163
	400	16	IDGLA16S/G3/8A	0102617*	G3/8A	36.0	18.0	12	30	27	22	154
	400	16	IDGLA16S/G3/4A	0102618*	G3/4A	39.0	20.5	16	30	32	32	228
	400	20	IDGLA20S	0102619*	G3/4A	42.0	20.5	16	36	32	32	264
	400	20	IDGLA20S/G1/2A	0102620*	G1/2A	42.0	20.5	14	36	32	26	256
	250	20	IDGLA20S/G1A	0102621*	G1A	44.0	22.5	18	36	41	39	387
	160	20	IDGLA20S/G11/4A	0102622*	G11/4A	44.0	22.5	20	36	50	49	460
	250	25	IDGLA25S	0102623*	G1A	47.0	23.0	18	46	41	39	483
	250	25	IDGLA25S/G3/4A	0102624*	G3/4A	47.0	23.0	16	46	41	32	461
	160	25	IDGLA25S/G11/4A	0102625*	G11/4A	47.0	23.0	20	46	50	49	550
	160	30	IDGLA30S	0102626*	G11/4A	50.0	23.5	20	50	50	49	660
	160	30	IDGLA30S/G1A	0102627*	G1A	50.0	23.5	18	50	46	39	575
	160	38	IDGLA38S	0102628*	G11/2A	57.0	26.0	22	60	55	55	921
	160	38	IDGLA38S/G11/4A	0102629*	G11/4A	57.0	26.0	20	60	55	49	939

*材料：G—碳钢；B—不锈钢；T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.

IDGLB

端直通接头—英制螺纹棱角密封

Male straight connecting union—British standard thread with edge seal

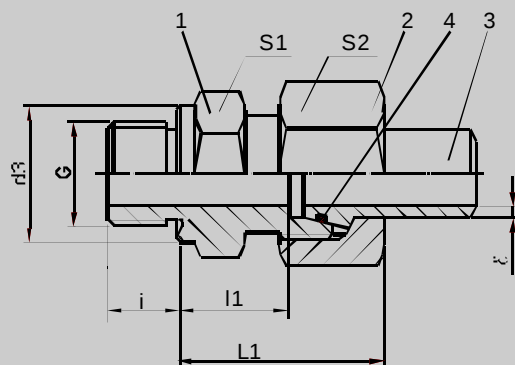

IDGLB

Part1—本体Male body
Part2—螺母Nut
Part3—焊接头Welding cone
Part4—O形圈O-ring

订货示例：型号为IDGLB06× $\frac{1}{2}$ L，材料为碳钢，仅供本体和螺母时，订货号为0102701G Part1+2。

Order example: Type is IDGLB06× $\frac{1}{2}$ L, material is carbon steel, only ordering body and nut, the reference is 0102701G Part1+2.

Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号 IDGLB	G	L1	I1	i	S2	S1	d3	Weight 重量(g) IDGLB
L	315	06	IDGLB06× $\frac{1}{2}$ L	0102701*	G1/8A	23.0	8.5	8	14	14	14	32
	315	06	IDGLB06× $\frac{1}{2}$ L/G1/4A	0102702*	G1/4A	25.0	10.0	12	14	19	18	47
	315	06	IDGLB06× $\frac{1}{2}$ L/G3/8A	0102703*	G3/8A	26.0	11.5	12	14	22	22	54
	315	06	IDGLB06× $\frac{1}{2}$ L/G1/2A	0102704*	G1/2A	27.0	12.0	14	14	27	26	79
	315	08	IDGLB08× $\frac{1}{2}$ L	0102705*	G1/4A	25.0	10.0	12	17	19	18	55
	315	08	IDGLB08× $\frac{1}{2}$ L/G1/8A	0102706*	G1/8A	23.0	8.5	8	17	14	14	44
	315	08	IDGLB08× $\frac{1}{2}$ L/G3/8A	0102707*	G3/8A	26.0	11.5	12	17	22	22	73
	315	08	IDGLB08× $\frac{1}{2}$ L/G1/2A	0102708*	G1/2A	27.0	12.0	14	17	27	26	102
	315	10	IDGLB10× $\frac{1}{2}$ L	0102709*	G1/4A	26.0	11.0	12	19	19	18	65
	315	10	IDGLB10× $\frac{1}{2}$ L/G1/8A	0102710*	G1/8A	25.0	10.5	8	19	17	14	58
	315	10	IDGLB10× $\frac{1}{2}$ L/G3/8A	0102711*	G3/8A	27.0	12.5	12	19	22	22	81
	315	10	IDGLB10× $\frac{1}{2}$ L/G1/2A	0102712*	G1/2A	28.0	13.0	14	19	27	26	109
	315	12	IDGLB12× $\frac{1}{2}$ L	0102713*	G3/8A	27.0	12.5	12	22	22	22	93
	315	12	IDGLB12× $\frac{1}{2}$ L/G1/8A	0102714*	G1/8A	26.0	11.5	8	22	19	14	78
	315	12	IDGLB12× $\frac{1}{2}$ L/G1/4A	0102715*	G1/4A	27.0	12.0	12	22	19	18	81
	315	12	IDGLB12× $\frac{1}{2}$ L/G1/2A	0102716*	G1/2A	28.0	13.0	14	22	27	26	118
	315	12	IDGLB12× $\frac{1}{2}$ L/G3/4A	0102717*	G3/4A	29.0	14.0	16	22	32	32	170
	250	15	IDGLB15× $\frac{1}{2}$ L	0102718*	G1/2A	29.0	14.0	14	27	27	26	150
	250	15	IDGLB15× $\frac{1}{2}$ L/G3/8A	0102719*	G3/8A	29.0	13.5	12	27	24	22	130
	250	15	IDGLB15× $\frac{1}{2}$ L/G3/4A	0102720*	G3/4A	30.0	15.0	16	27	32	32	195
	250	18	IDGLB18× $\frac{1}{2}$ L	0102721*	G1/2A	31.0	14.5	14	32	27	26	176
	250	18	IDGLB18× $\frac{1}{2}$ L/G3/8A	0102722*	G3/8A	29.5	14.0	12	32	27	22	174
	250	18	IDGLB18× $\frac{1}{2}$ L/G3/4A	0102723*	G3/4A	30.0	14.5	16	32	32	32	215
	160	22	IDGLB22× $\frac{1}{2}$ L	0102724*	G3/4A	33.0	16.5	16	36	32	32	243
	160	22	IDGLB22× $\frac{1}{2}$ L/G1/2A	0102725*	G1/2A	33.0	16.5	14	36	32	26	231
	160	22	IDGLB22× $\frac{1}{2}$ L/G1A	0102726*	G1A	33.5	17.5	18	36	41	39	324
	160	28	IDGLB28× $\frac{1}{2}$ L	0102727*	G1A	34.0	17.5	18	41	41	39	354
	160	28	IDGLB28× $\frac{1}{2}$ L/G1/2A	0102728*	G1/2A	34.0	17.5	14	41	41	26	327
	160	28	IDGLB28× $\frac{1}{2}$ L/G3/4A	0102729*	G3/4A	34.0	17.5	16	41	41	32	342
	160	28	IDGLB28× $\frac{1}{2}$ L/G11/4A	0102730*	G11/4A	35.0	18.3	20	41	50	50	502
	160	35	IDGLB35× $\frac{1}{2}$ L/G1/2A	0102731*	G1/2A	39.0	17.5	14	50	46	26	440
	160	35	IDGLB35× $\frac{1}{2}$ L/G3/4A	0102732*	G3/4A	39.0	17.5	16	50	46	32	470
	160	35	IDGLB35× $\frac{1}{2}$ L/G1A	0102733*	G1A	39.0	17.5	18	50	46	39	470
	160	35	IDGLB35× $\frac{1}{2}$ L	0102734*	G11/4A	39.0	17.5	20	50	50	49	582
	160	35	IDGLB35× $\frac{1}{2}$ L/G11/2A	0102735*	G11/2A	41.0	19.5	22	50	55	55	682
	160	42	IDGLB42× $\frac{1}{2}$ L	0102736*	G11/2A	42.0	19.0	22	60	55	55	778
	160	42	IDGLB42× $\frac{1}{2}$ L/G1A	0102737*	G1A	42.0	19.0	18	60	55	39	770
	160	42	IDGLB42× $\frac{1}{2}$ L/G11/4A	0102738*	G11/4A	41.5	19.0	20	60	55	49	765

*材料：G—碳钢；B—不锈钢。

*Material: G—Carbon steel; B—Stainless steel.

上海欧际冶金机械制造有限公司

地址：上海市宝山区富联路1188号


电话：021-66047188 66047818 传真：021-66047588

B27

IDGLB

端直通过头—英制螺纹棱角密封

Male straight connecting union—British standard thread with edge seal

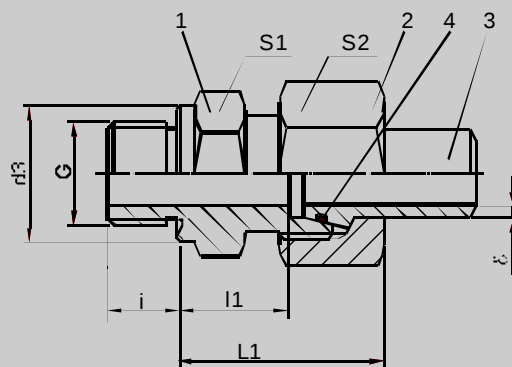

- Part1—本体Male body
Part2—螺母Nut
Part3—焊接头Welding cone
Part4—O形圈O-ring

IDGLB

订货示例：型号为IDGLB06× $\frac{1}{8}$ S，材料为碳钢，仅供本体和螺母时，订货号为0102801G Part1+2。
Order example: Type is IDGLB06× $\frac{1}{8}$ S, material is carbon steel, only ordering body and nut, the reference is 0102801G Part1+2.


Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号 IDGLB	G	L1	l1	i	S2	S1	d3	Weight 重量(g) IDGLB
S	400	06	IDGLB06× $\frac{1}{8}$ S	0102801*	G1/4A	28.0	13.0	12	17	19	18	61
	400	06	IDGLB06× $\frac{1}{8}$ S/G1/8A	0102802*	G1/8A	27.0	12.5	8	17	14	14	48
	400	06	IDGLB06× $\frac{1}{8}$ S/G3/8A	0102803*	G3/8A	30.0	15.5	12	17	22	22	83
	400	06	IDGLB06× $\frac{1}{8}$ S/G1/2A	0102804*	G1/2A	33.0	18.0	14	17	27	26	109
	400	08	IDGLB08× $\frac{1}{8}$ S	0102805*	G1/4A	30.0	15.0	12	19	19	18	74
	400	08	IDGLB08× $\frac{1}{8}$ S/G3/8A	0102806*	G3/8A	30.0	15.5	12	19	22	22	92
	400	08	IDGLB08× $\frac{1}{8}$ S/G1/2A	0102807*	G1/2A	33.0	18.0	14	19	27	26	133
	400	10	IDGLB10× $\frac{1}{8}$ S	0102808*	G3/8A	31.0	15.0	12	22	22	22	106
	400	10	IDGLB10× $\frac{1}{8}$ S/G1/4A	0102809*	G1/4A	31.0	14.5	12	22	19	18	93
	400	10	IDGLB10× $\frac{1}{8}$ S/G1/2A	0102810*	G1/2A	34.0	17.5	14	22	27	26	147
	400	12	IDGLB12× $\frac{1}{8}$ S	0102811*	G3/8A	33.0	17.0	12	24	22	22	122
	400	12	IDGLB12× $\frac{1}{8}$ S/G1/4A	0102812*	G1/4A	33.0	16.5	12	24	22	18	116
	400	12	IDGLB12× $\frac{1}{8}$ S/G1/2A	0102813*	G1/2A	34.0	17.5	14	24	27	26	156
	400	14	IDGLB14× $\frac{1}{8}$ S	0102814*	G1/2A	37.0	19.0	14	27	27	26	187
	400	14	IDGLB14× $\frac{1}{8}$ S/G3/8A	0102815*	G3/8A	36.0	18.5	12	27	24	22	164
	400	16	IDGLB16× $\frac{1}{8}$ S	0102816*	G1/2A	37.0	18.5	14	30	27	26	204
	400	16	IDGLB16× $\frac{1}{8}$ S/G3/8A	0102817*	G3/8A	36.0	18.0	12	30	27	22	195
	400	16	IDGLB16× $\frac{1}{8}$ S/G3/4A	0102818*	G3/4A	39.0	20.5	16	30	32	32	269
	400	20	IDGLB20× $\frac{1}{8}$ S	0102819*	G3/4A	42.0	20.5	16	36	32	32	342
	400	20	IDGLB20× $\frac{1}{8}$ S/G1/2A	0102820*	G1/2A	42.0	20.5	14	36	32	26	334
	250	20	IDGLB20× $\frac{1}{8}$ S/G1A	0102821*	G1A	44.0	22.5	18	36	41	39	465
	160	20	IDGLB20× $\frac{1}{8}$ S/G11/4A	0102822*	G11/4A	44.0	22.5	20	36	50	49	538
	250	25	IDGLB25× $\frac{1}{8}$ S	0102823*	G1A	47.0	23.0	18	46	41	39	608
	250	25	IDGLB25× $\frac{1}{8}$ S/G3/4A	0102824*	G3/4A	47.0	23.0	16	46	41	32	586
	160	25	IDGLB25× $\frac{1}{8}$ S/G11/4A	0102825*	G11/4A	47.0	23.0	20	46	50	49	675
	160	30	IDGLB30× $\frac{1}{8}$ S	0102826*	G11/4A	50.0	23.5	20	50	50	49	848
	160	30	IDGLB30× $\frac{1}{8}$ S/G1A	0102827*	G1A	50.0	23.5	18	50	46	39	763
	160	38	IDGLB38× $\frac{1}{8}$ S	0102828*	G11/2A	57.0	26.0	22	60	55	55	1224
	160	38	IDGLB38× $\frac{1}{8}$ S/G11/4A	0102829*	G11/4A	57.0	26.0	20	60	55	49	1129

*材料: G—碳钢; B—不锈钢。 *Material: G—Carbon steel; B—Stainless steel.

IDMJA

端直通接头—公制螺纹带金属密封垫

Male straight connecting union—Metric thread with metal seal

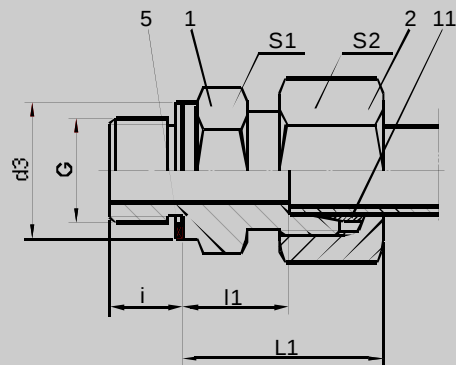

Part1—本体Male body
Part2—螺母Nut
Part5—金属垫Metal seal
Part11—卡套Ferrule

IDMJA

订货示例：型号为IDMJA06L，材料为碳钢，仅供本体和螺母时，订货号为0102901G Part1+2。
Order example: Type is IDMJA06L, material is carbon steel, only ordering body and nut, the reference is 0102901G Part1+2.

Series 系列	PN	Tube OD 管子外径	Type 型号	Reference 订货号 IDMJA	G	L1	I1	i	S2	S1	d3	Weight 重量(g) IDMJA
L	315	06	IDMJA06L	0102901*	M10×1	23	8.5	8	14	14	14	25
	315	08	IDMJA08L	0102902*	M12×1.5	25	10.0	12	17	17	17	39
	315	10	IDMJA10L	0102903*	M14×1.5	26	11.0	12	19	19	19	52
	315	10	IDMJA10L/M10×1	0102904*	M10×1	25	10.5	8	19	17	14	21
	315	10	IDMJA10L/M12×1.5	0102905*	M12×1.5	26	11.0	12	19	17	17	46
	315	10	IDMJA10L/M16×1.5	0102906*	M16×1.5	27	12.0	12	19	22	21	61
	315	10	IDMJA10L/M18×1.5	0102907*	M18×1.5	27	12.5	12	19	24	23	71
	315	10	IDMJA10L/M22×1.5	0102908*	M22×1.5	29	14.0	14	19	27	27	93
	315	12	IDMJA12L/M14×1.5	0102909*	M14×1.5	26	11.0	12	22	19	19	59
	315	12	IDMJA12L	0102910*	M16×1.5	27	12.5	12	22	22	21	69
	315	12	IDMJA12L/M18×1.5	0102911*	M18×1.5	27	12.5	12	22	24	23	76
	315	12	IDMJA12L/M22×1.5	0102912*	M22×1.5	29	14.0	14	22	27	27	105
	250	15	IDMJA15L/M16×1.5	0102913*	M16×1.5	28	13.0	12	27	24	21	96
	250	15	IDMJA15L	0102914*	M18×1.5	29	13.5	12	27	24	23	98
	250	15	IDMJA15L/M22×1.5	0102915*	M22×1.5	30	15.0	14	27	27	27	123
	250	18	IDMJA18L/M18×1.5	0102916*	M18×1.5	30	14.0	12	32	27	23	136
	250	18	IDMJA18L	0102917*	M22×1.5	31	14.5	14	32	27	27	144
	160	22	IDMJA22L/M22×1.5	0102918*	M22×1.5	33	16.5	14	36	32	27	181
	160	22	IDMJA22L	0102919*	M26×1.5	33	16.5	16	36	32	31	192
	160	28	IDMJA28L	0102920*	M33×2	34	17.5	18	41	41	39	266
S	160	35	IDMJA35L	0102921*	M42×2	39	17.5	20	50	50	49	436
	160	42	IDMJA42L	0102922*	M48×2	42	19.0	22	60	55	55	593
	400	06	IDMJA06S	0102923*	M12×1.5	28	13.0	12	17	17	17	49
	400	06	IDMJA06S/M14×1.5	0102924*	M14×1.5	30	15.0	12	17	19	19	65
	400	08	IDMJA08S	0102925*	M14×1.5	30	15.0	12	19	19	19	65
	400	10	IDMJA10S	0102926*	M16×1.5	31	15.0	12	22	22	21	88
	400	12	IDMJA12S/M14×1.5	0102927*	M14×1.5	33	16.5	12	24	22	19	99
	400	12	IDMJA12S	0102928*	M18×1.5	33	17.0	12	24	24	23	110
	400	12	IDMJA12S/M22×1.5	0102929*	M22×1.5	34	17.5	14	24	27	27	145
	400	14	IDMJA14S	0102930*	M20×1.5	37	19.0	14	27	27	25	152
	400	16	IDMJA16S/M18×1.5	0102931*	M18×1.5	36	18.0	12	30	27	23	159
	400	16	IDMJA16S	0102932*	M22×1.5	37	18.5	14	30	27	27	168
	400	20	IDMJA20S	0102933*	M27×2	42	20.5	16	36	32	32	265
	250	25	IDMJA25S	0102934*	M33×2	47	23.0	18	46	41	39	484
	160	30	IDMJA30S	0102935*	M42×2	50	23.5	20	50	50	49	659
	160	38	IDMJA38S	0102936*	M48×2	57	26.0	22	60	55	55	929

*材料：G—碳钢；B—不锈钢；T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.

上海欧际冶金机械制造有限公司

地址：上海市宝山区富联路1188号


电话：021-66047188 66047818 传真：021-66047588

B29

IDMJB

端直接头—公制螺纹带金属密封垫

Male straight connecting union—Metric thread with metal seal

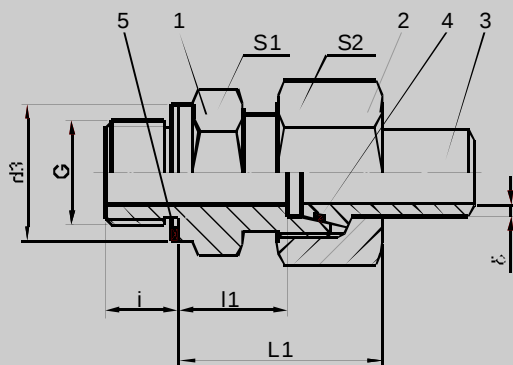

IDMJB

- Part1—本体Male body
- Part2—螺母Nut
- Part3—焊接头Welding cone
- Part4—O形圈O-ring
- Part5—金属垫Metal seal

订货示例：型号为IDMJB06× $\frac{1}{4}$ L，材料为碳钢，仅供本体和螺母时，订货号为0103001G Part1+2。
Order example: Type is IDMJB06× $\frac{1}{4}$ L, material is carbon steel, only ordering body and nut, the reference is 0103001G Part1+2.


Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号 IDMJB	G	L1	l1	i	S2	S1	d3	Weight 重量(g) IDMJB
L	315	06	IDMJB06× $\frac{1}{4}$ L	0103001*	M10×1	23	8.5	8	14	14	14	32
	315	08	IDMJB08× $\frac{1}{4}$ L	0103002*	M12×1.5	25	10.0	12	17	17	17	48
	315	10	IDMJB10× $\frac{1}{4}$ L	0103003*	M14×1.5	26	11.0	12	19	19	19	68
	315	10	IDMJB10× $\frac{1}{4}$ L/M10×1	0103004*	M10×1	25	10.5	8	19	17	14	37
	315	10	IDMJB10× $\frac{1}{4}$ L/M12×1.5	0103005*	M12×1.5	26	11.0	12	19	17	17	62
	315	10	IDMJB10× $\frac{1}{4}$ L/M16×1.5	0103006*	M16×1.5	27	12.0	12	19	22	21	77
	315	10	IDMJB10× $\frac{1}{4}$ L/M18×1.5	0103007*	M18×1.5	27	12.5	12	19	24	23	87
	315	10	IDMJB10× $\frac{1}{4}$ L/M22×1.5	0103008*	M22×1.5	29	14.0	14	19	27	27	109
	315	12	IDMJB12× $\frac{1}{4}$ L/M14×1.5	0103009*	M14×1.5	26	11.0	12	22	19	19	80
	315	12	IDMJB12× $\frac{1}{4}$ L	0103010*	M16×1.5	27	12.5	12	22	22	21	90
	315	12	IDMJB12× $\frac{1}{4}$ L/M18×1.5	0103011*	M18×1.5	27	12.5	12	22	24	23	97
	315	12	IDMJB12× $\frac{1}{4}$ L/M22×1.5	0103012*	M22×1.5	29	14.0	14	22	27	27	126
	250	15	IDMJB15× $\frac{1}{4}$ L/M16×1.5	0103013*	M16×1.5	28	13.0	12	27	24	21	126
	250	15	IDMJB15× $\frac{1}{4}$ L	0103014*	M18×1.5	29	13.5	12	27	24	23	128
	250	15	IDMJB15× $\frac{1}{4}$ L/M22×1.5	0103015*	M22×1.5	30	15.0	14	27	27	27	153
	250	18	IDMJB18× $\frac{1}{4}$ L/M18×1.5	0103016*	M18×1.5	30	14.0	12	32	27	23	171
	250	18	IDMJB18× $\frac{1}{4}$ L	0103017*	M22×1.5	31	14.5	14	32	27	27	179
	160	22	IDMJB22× $\frac{1}{4}$ L/M22×1.5	0103018*	M22×1.5	33	16.5	14	36	32	27	229
	160	22	IDMJB22× $\frac{1}{4}$ L	0103019*	M26×1.5	33	16.5	16	36	32	31	240
	160	28	IDMJB28× $\frac{1}{4}$ L	0103020*	M33×2	34	17.5	18	41	41	39	341
S	160	35	IDMJB35× $\frac{1}{4}$ L	0103021*	M42×2	39	17.5	20	50	50	49	566
	160	42	IDMJB42× $\frac{1}{4}$ L	0103022*	M48×2	42	19.0	22	60	55	55	768
	400	06	IDMJB06× $\frac{1}{4}$ S	0103023*	M12×1.5	28	13.0	12	17	17	17	56
	400	06	IDMJB06× $\frac{1}{4}$ S/M14×1.5	0103024*	M14×1.5	30	15.0	12	17	19	19	72
	400	08	IDMJB08× $\frac{1}{4}$ S	0103025*	M14×1.5	30	15.0	12	19	19	19	81
	400	10	IDMJB10× $\frac{1}{4}$ S	0103026*	M16×1.5	31	15.0	12	22	22	21	104
	400	12	IDMJB12× $\frac{1}{4}$ S/M14×1.5	0103027*	M14×1.5	33	16.5	12	24	22	19	120
	400	12	IDMJB12× $\frac{1}{4}$ S	0103028*	M18×1.5	33	17.0	12	24	24	23	131
	400	12	IDMJB12× $\frac{1}{4}$ S/M22×1.5	0103029*	M22×1.5	34	17.5	14	24	27	27	166
	400	14	IDMJB14× $\frac{1}{4}$ S	0103030*	M20×1.5	37	19.0	14	27	27	25	176
	400	16	IDMJB16× $\frac{1}{4}$ S/M18×1.5	0103031*	M18×1.5	36	18.0	12	30	27	23	200
	400	16	IDMJB16× $\frac{1}{4}$ S	0103032*	M22×1.5	37	18.5	14	30	27	27	209
	400	20	IDMJB20× $\frac{1}{4}$ S	0103033*	M27×2	42	20.5	16	36	32	32	337
	250	25	IDMJB25× $\frac{1}{4}$ S	0103034*	M33×2	47	23.0	18	46	41	39	614
	160	30	IDMJB30× $\frac{1}{4}$ S	0103035*	M42×2	50	23.5	20	50	50	49	840
	160	38	IDMJB38× $\frac{1}{4}$ S	0103036*	M48×2	57	26.0	22	60	55	55	1229

*材料：G—碳钢；B—不锈钢。 *Material: G—Carbon steel; B—Stainless steel.

IDMLA

端直通接头—公制螺纹棱角密封

Male straight connecting union—Metric thread with edge seal

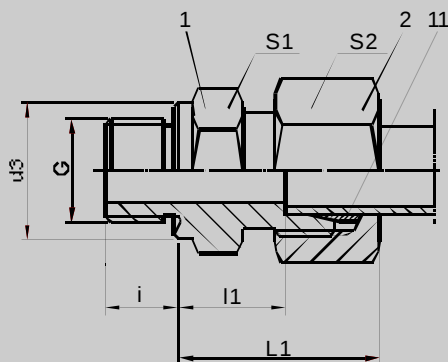

Part1—本体Malebody

Part2—螺母Nut

Part11—卡套Ferrule

IDMLA

订货示例：型号为IDMLA06L，材料为碳钢，仅供本体和螺母时，订货号为0103101G Part1+2。

Order example: Type is IDMLA06L, material is carbon steel, only ordering body and nut, the reference is 0103101G Part1+2.

Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号 IDMLA	G	L1	I1	i	S2	S1	d3	Weight 重量(g) IDMLA
L	315	06	IDMLA06L	0103101*	M10×1	23	8.5	8	14	14	14	25
	315	08	IDMLA08L	0103102*	M12×1.5	25	10.0	12	17	17	17	39
	315	10	IDMLA10L	0103103*	M14×1.5	26	11.0	12	19	19	19	52
	315	10	IDMLA10L/M10×1	0103104*	M10×1	25	10.5	8	19	17	14	21
	315	10	IDMLA10L/M12×1.5	0103105*	M12×1.5	26	11.0	12	19	17	17	46
	315	10	IDMLA10L/M16×1.5	0103106*	M16×1.5	27	12.0	12	19	22	21	61
	315	10	IDMLA10L/M18×1.5	0103107*	M18×1.5	27	12.5	12	19	24	23	71
	315	10	IDMLA10L/M22×1.5	0103108*	M22×1.5	29	14.0	14	19	27	27	93
	315	12	IDMLA12L/M14×1.5	0103109*	M14×1.5	26	11.0	12	22	19	19	59
	315	12	IDMLA12L	0103110*	M16×1.5	27	12.5	12	22	22	21	69
	315	12	IDMLA12L/M18×1.5	0103111*	M18×1.5	27	12.5	12	22	24	23	76
	315	12	IDMLA12L/M22×1.5	0103112*	M22×1.5	29	14.0	14	22	27	27	105
	250	15	IDMLA15L/M16×1.5	0103113*	M16×1.5	28	13.0	12	27	24	21	96
	250	15	IDMLA15L	0103114*	M18×1.5	29	13.5	12	27	24	23	98
	250	15	IDMLA15L/M22×1.5	0103115*	M22×1.5	30	15.0	14	27	27	27	123
	250	18	IDMLA18L/M18×1.5	0103116*	M18×1.5	30	14.0	12	32	27	23	136
	250	18	IDMLA18L	0103117*	M22×1.5	31	14.5	14	32	27	27	144
	160	22	IDMLA22L/M22×1.5	0103118*	M22×1.5	33	16.5	14	36	32	27	181
	160	22	IDMLA22L	0103119*	M26×1.5	33	16.5	16	36	32	31	192
	160	28	IDMLA28L	0103120*	M33×2	34	17.5	18	41	41	39	266
S	160	35	IDMLA35L	0103121*	M42×2	39	17.5	20	50	50	49	436
	160	42	IDMLA42L	0103122*	M48×2	42	19.0	22	60	55	55	593
	400	06	IDMLA06S	0103123*	M12×1.5	28	13.0	12	17	17	17	49
	400	06	IDMLA06S/M14×1.5	0103124*	M14×1.5	30	15.0	12	17	19	19	65
	400	08	IDMLA08S	0103125*	M14×1.5	30	15.0	12	19	19	19	65
	400	10	IDMLA10S	0103126*	M16×1.5	31	15.0	12	22	22	21	88
	400	12	IDMLA12S/M14×1.5	0103127*	M14×1.5	33	16.5	12	24	22	19	99
	400	12	IDMLA12S	0103128*	M18×1.5	33	17.0	12	24	24	23	110
	400	12	IDMLA12S/M22×1.5	0103129*	M22×1.5	34	17.5	14	24	27	27	145
	400	14	IDMLA14S	0103130*	M20×1.5	37	19.0	14	27	27	25	152
	400	16	IDMLA16S/M18×1.5	0103131*	M18×1.5	36	18.0	12	30	27	23	159
	400	16	IDMLA16S	0103132*	M22×1.5	37	18.5	14	30	27	27	168
	400	20	IDMLA20S	0103133*	M27×2	42	20.5	16	36	32	32	265
	250	25	IDMLA25S	0103134*	M33×2	47	23.0	18	46	41	39	484
	160	30	IDMLA30S	0103135*	M42×2	50	23.5	20	50	50	49	659
	160	38	IDMLA38S	0103136*	M48×2	57	26.0	22	60	55	55	929

*材料：G—碳钢；B—不锈钢；T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.

上海欧际冶金机械制造有限公司

地址：上海市宝山区富联路1188号


电话：021-66047188 66047818 传真：021-66047588

B31

IDMLB

端直通接头—公制螺纹棱角密封

Male straight connecting union—Metric thread with edged seal

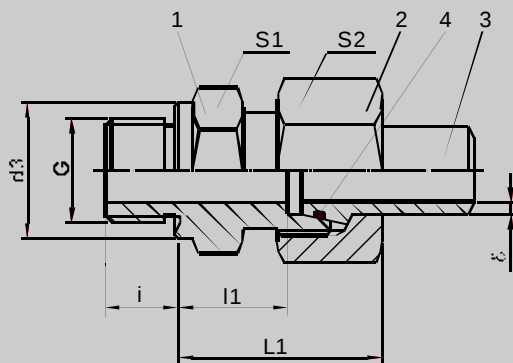

IDMLB

- Part1—本体Male body
Part2—螺母Nut
Part3—焊接头Welding cone
Part4—O形圈O-ring

订货示例：型号为IDMLB06× $\frac{1}{4}$ L，材料为碳钢，仅供本体和螺母时，订货号为0103201G Part1+2。
Order example: Type is IDMLB06× $\frac{1}{4}$ L, material is carbon steel, only ordering body and nut, the reference is 0103201G Part1+2.

Series 系列	PN	Tube OD 管子外径	Type 型号	Reference 订货号 IDMLB	G	L1	I1	i	S2	S1	d3	Weight 重量(g) IDMLB
L	315	06	IDMLB06× $\frac{1}{4}$ L	0103201*	M10×1	23	8.5	8	14	14	14	32
	315	08	IDMLB08× $\frac{1}{4}$ L	0103202*	M12×1.5	25	10.0	12	17	17	17	50
	315	10	IDMLB10× $\frac{1}{4}$ L	0103203*	M14×1.5	26	11.0	12	19	19	19	68
	315	10	IDMLB10× $\frac{1}{4}$ L/M10×1	0103204*	M10×1	25	10.5	8	19	17	14	37
	315	10	IDMLB10× $\frac{1}{4}$ L/M12×1.5	0103205*	M12×1.5	26	11.0	12	19	17	17	62
	315	10	IDMLB10× $\frac{1}{4}$ L/M16×1.5	0103206*	M16×1.5	27	12.0	12	19	22	21	77
	315	10	IDMLB10× $\frac{1}{4}$ L/M18×1.5	0103207*	M18×1.5	27	12.5	12	19	24	23	87
	315	10	IDMLB10× $\frac{1}{4}$ L/M22×1.5	0103208*	M22×1.5	29	14.0	14	19	27	27	109
	315	12	IDMLB12× $\frac{1}{4}$ L/M14×1.5	0103209*	M14×1.5	26	11.0	12	22	19	19	81
	315	12	IDMLB12× $\frac{1}{4}$ L	0103210*	M16×1.5	27	12.5	12	22	22	21	91
	315	12	IDMLB12× $\frac{1}{4}$ L/M18×1.5	0103211*	M18×1.5	27	12.5	12	22	24	23	98
	315	12	IDMLB12× $\frac{1}{4}$ L/M22×1.5	0103212*	M22×1.5	29	14.0	14	22	27	27	127
	250	15	IDMLB15× $\frac{1}{4}$ L/M16×1.5	0103213*	M16×1.5	28	13.0	12	27	24	21	127
	250	15	IDMLB15× $\frac{1}{4}$ L	0103214*	M18×1.5	29	13.5	12	27	24	23	129
	250	15	IDMLB15× $\frac{1}{4}$ L/M22×1.5	0103215*	M22×1.5	30	15.0	14	27	27	27	154
	250	18	IDMLB18× $\frac{1}{4}$ L/M18×1.5	0103216*	M18×1.5	30	14.0	12	32	27	23	173
	250	18	IDMLB18× $\frac{1}{4}$ L	0103217*	M22×1.5	31	14.5	14	32	27	27	181
	160	22	IDMLB22× $\frac{1}{4}$ L/M22×1.5	0103218*	M22×1.5	33	16.5	14	36	32	27	232
	160	22	IDMLB22× $\frac{1}{4}$ L	0103219*	M26×1.5	33	16.5	16	36	32	31	243
	160	28	IDMLB28× $\frac{1}{4}$ L	0103220*	M33×2	34	17.5	18	41	41	39	354
S	160	35	IDMLB35× $\frac{1}{4}$ L	0103221*	M42×2	39	17.5	20	50	50	49	586
	160	42	IDMLB42× $\frac{1}{4}$ L	0103222*	M48×2	42	19.0	22	60	55	55	783
	400	06	IDMLB06× $\frac{1}{4}$ S	0103223*	M12×1.5	28	13.0	12	17	17	17	56
	400	06	IDMLB06× $\frac{1}{4}$ S/M14×1.5	0103224*	M14×1.5	30	15.0	12	17	19	19	72
	400	08	IDMLB08× $\frac{1}{4}$ S	0103225*	M14×1.5	30	15.0	12	19	19	19	76
	400	10	IDMLB10× $\frac{1}{4}$ S	0103226*	M16×1.5	31	15.0	12	22	22	21	104
	400	12	IDMLB12× $\frac{1}{4}$ S/M14×1.5	0103227*	M14×1.5	33	16.5	12	24	22	19	121
	400	12	IDMLB12× $\frac{1}{4}$ S	0103228*	M18×1.5	33	17.0	12	24	24	23	132
	400	12	IDMLB12× $\frac{1}{4}$ S/M22×1.5	0103229*	M22×1.5	34	17.5	14	24	27	27	167
	400	14	IDMLB14× $\frac{1}{4}$ S	0103230*	M20×1.5	37	19.0	14	27	27	25	185
	400	16	IDMLB16× $\frac{1}{4}$ S/M18×1.5	0103231*	M18×1.5	36	18.0	12	30	27	23	200
	400	16	IDMLB16× $\frac{1}{4}$ S	0103232*	M22×1.5	37	18.5	14	30	27	27	209
	400	20	IDMLB20× $\frac{1}{4}$ S	0103233*	M27×2	42	20.5	16	36	32	32	343
	250	25	IDMLB25× $\frac{1}{4}$ S	0103234*	M33×2	47	23.0	18	46	41	39	609
	160	30	IDMLB30× $\frac{1}{4}$ S	0103235*	M42×2	50	23.5	20	50	50	49	847
	160	38	IDMLB38× $\frac{1}{4}$ S	0103236*	M48×2	57	26.0	22	60	55	55	1232

*材料: G—碳钢; B—不锈钢。 *Material: G—Carbon steel; B—Stainless steel.

IDRXA

端直连接头—英制锥螺纹

Male straight connecting union—British standard cone pipe thread




Part1—本体Male body

Part2—螺母Nut

Part11—卡套Ferrule

订货示例：型号为IDRXA04LLR1/8，材料为碳钢，仅供本体和螺母时，
订货号为0103301G Part1+2。

Order example: Type is IDRXA04LLR1/8, material is carbon steel, only ordering body and nut, the reference is 0103301G Part1+2.



IDRXA

Series 系列	PN	Tube OD 管子外径	Type 型号	Reference 订货号 IDRXA	G	L1	l1	i	S2	S1	Weight 重量(g) IDRXA
LL	100	04	IDRXA04LLR1/8	0103301*	R1/8	26	16.0	8	10	11	13
	100	06	IDRXA06LLR1/8	0103302*	R1/8	26	14.5	8	12	11	14
	100	08	IDRXA08LLR1/8	0103303*	R1/8	28	16.5	8	14	12	17
	100	08	IDRXA08LLR1/4	0103304*	R1/4	32	20.5	12	14	14	25
	100	10	IDRXA10LLR1/4	0103305*	R1/4	32	20.5	12	17	14	27
	100	12	IDRXA12LLR1/4	0103306*	R1/4	32	20.0	12	19	17	32
	100	12	IDRXA12LLR3/8	0103307*	R3/8	32	20.0	12	19	17	37
L	315	06	IDRXA06LR1/8	0103308*	R1/8	30	15.0	8	14	12	22
	315	06	IDRXA06LR1/4	0103309*	R1/4	35	20.0	12	14	17	35
	315	08	IDRXA08LR1/8	0103310*	R1/8	31	16.0	8	17	17	32
	315	08	IDRXA08LR1/4	0103311*	R1/4	35	20.0	12	17	17	39
	315	10	IDRXA10LR1/4	0103312*	R1/4	36	21.0	12	19	17	45
	315	12	IDRXA12LR1/4	0103313*	R1/4	37	22.0	12	22	19	58
	315	12	IDRXA12LR3/8	0103314*	R3/8	37	22.0	12	22	19	61
	315	12	IDRXA12LR1/2	0103315*	R1/2	39	24.0	14	22	24	82
	315	15	IDRXA15LR3/8	0103316*	R3/8	38	23.0	12	27	24	95
	315	15	IDRXA15LR1/2	0103317*	R1/2	40	25.0	14	27	24	105
	315	18	IDRXA18LR1/2	0103318*	R1/2	42	25.5	14	32	27	131
	160	22	IDRXA18LR3/4	0103319*	R3/4	46	29.5	16	36	32	188
	160	28	IDRXA28LR1	0103320*	R1	49	32.5	18	41	41	269
	160	35	IDRXA35LR11/4	0103321*	R11/4	56	34.5	20	50	46	432
	160	42	IDRXA42LR11/2	0103322*	R11/2	61	38.0	22	60	55	588

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.

IDZXA

端直连接头—公制锥螺纹

Male straight connecting union—Metric cone pipe thread


Part1—本体Male body

Part2—螺母Nut

Part11—卡套Ferrule

订货示例：型号为IDZXA04LLZM6×1，材料为碳钢，仅供本体和螺母时，
订货号为0103323G Part1+2。

Order example: Type is IDZXA04LLZM6×1, material is carbon steel, only ordering body and nut, the reference is 0103323G Part1+2.



IDZXA

Series 系列	PN	Tube OD 管子外径	Type 型号	Reference 订货号 IDZXA	G	L1	l1	i	S2	S1	Weight 重量(g) IDZXA
LL	100	04	IDZXA04LLZM6×1	0103323*	ZM6×1	26	16.0	8	10	9	10
	100	04	IDZXA04LLZM8×1	0103324*	ZM8×1	26	16.0	8	10	10	11
	100	06	IDZXA06LLZM10×1	0103325*	ZM10×1	26	14.5	8	12	11	14
	100	06	IDZXA06LLZM8×1	0103326*	ZM8×1	26	14.5	8	12	11	14
	100	08	IDZXA08LLZM10×1	0103327*	ZM10×1	28	16.5	8	14	12	17

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.

上海欧际冶金机械制造有限公司

地址: 上海市宝山区富联路1188号

电话: 021-66047188 66047818 传真: 021-66047588

B33


IDRXB

端直通接头—英制锥螺纹

Male straight connecting union—British standard cone pipe thread



Part1—本体Male body
Part2—螺母Nut
Part3—焊接头Welding cone
Part4—O形圈O-ring

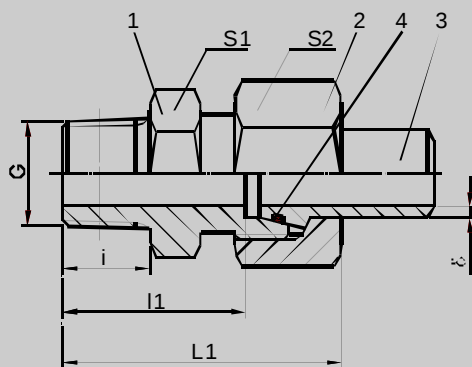

IDRXB

订货示例：型号为IDRXB06× $\frac{1}{8}$ LR1/8，材料为碳钢，仅供本体和螺母时，订货号为0103401G Part1+2。

Order example: Type is IDRXB06× $\frac{1}{8}$ LR1/8, material is carbon steel, only ordering body and nut, the reference is 0103401G Part1+2.


Series 系列	PN	Tube OD 管子外径	Type 型号	Reference 订货号 IDRXB	G	L1	I1	i	S2	S1	Weight 重量(g) IDRXB
L	315	06	IDRXB06× $\frac{1}{8}$ LR1/8	0103401*	R1/8	30	15.0	8	14	12	28
	315	06	IDRXB06× $\frac{1}{4}$ LR1/4	0103402*	R1/4	35	20.0	12	14	17	42
	315	08	IDRXB08× $\frac{1}{8}$ LR1/8	0103403*	R1/8	31	16.0	8	17	17	43
	315	08	IDRXB08× $\frac{1}{4}$ LR1/4	0103404*	R1/4	35	20.0	12	17	17	50
	315	10	IDRXB10× $\frac{1}{4}$ LR1/4	0103405*	R1/4	36	21.0	12	19	17	61
	315	12	IDRXB12× $\frac{1}{4}$ LR1/4	0103406*	R1/4	37	22.0	12	22	19	80
	315	12	IDRXB12× $\frac{3}{8}$ LR3/8	0103407*	R3/8	37	22.0	12	22	19	83
	315	12	IDRXB12× $\frac{1}{2}$ LR1/2	0103408*	R1/2	39	24.0	14	22	24	104
	315	15	IDRXB15× $\frac{3}{8}$ LR3/8	0103409*	R3/8	38	23.0	12	27	24	126
	315	15	IDRXB15× $\frac{1}{2}$ LR1/2	0103410*	R1/2	40	25.0	14	27	24	136
	315	18	IDRXB18× $\frac{1}{2}$ LR1/2	0103411*	R1/2	42	25.5	14	32	27	168
	160	22	IDRXB18× $\frac{3}{4}$ LR3/4	0103412*	R3/4	46	29.5	16	36	32	239
	160	28	IDRXB28× $\frac{1}{2}$ LR1	0103413*	R1	49	32.5	18	41	41	357
	160	35	IDRXB35× $\frac{1}{2}$ LR11/4	0103414*	R11/4	56	34.5	20	50	46	582
	160	42	IDRXB42× $\frac{1}{2}$ LR11/2	0103415*	R11/2	61	38.0	22	60	55	778

*材料: G—碳钢; B—不锈钢。 *Material: G—Carbon steel; B—Stainless steel.

IDNXA

端直连接头—美制锥螺纹

Male straight connecting union—American standard cone pipe thread

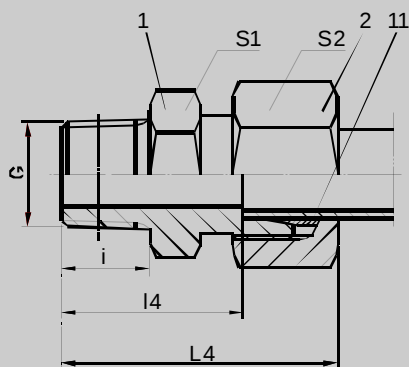

Part1—本体Male body

Part2—螺母Nut

Part11—卡套Ferrule

IDNXA

订货示例：型号为IDNXA04LL1/4NPT，材料为碳钢，仅供本体和螺母时，订货号为0103501G Part1+2。

Order example: Type is IDNXA04LL1/4NPT, material is carbon steel, only ordering body and nut, therefore is 0103501G Part1+2.

Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号		L4	l4	i	S2	S1	Weight 重量(g)
				IDNXA	G						IDNXA
LL	100	04	IDNXA04LL1/4NPT	0103501*	1/8-27NPT	28	18.5	10.0	10	11	14
	100	06	IDNXA06LL1/8NPT	0103502*	1/8-27NPT	28	16.5	10.0	12	11	15
	100	08	IDNXA08LL1/8NPT	0103503*	1/8-27NPT	30	18.5	10.0	14	12	19
L	315	06	IDNXA06L1/8NPT	0103504*	1/8-27NPT	32	17.0	10.0	14	12	24
	315	06	IDNXA06L1/4NPT	0103505*	1/4-18NPT	38	23.0	15.0	14	17	38
	315	06	IDNXA06L3/8NPT	0103506*	3/8-18NPT	38	23.0	15.3	14	19	44
	315	06	IDNXA06L1/2NPT	0103507*	1/2-14NPT	44	29.0	20.0	14	22	65
	315	08	IDNXA08L1/8NPT	0103508*	1/8-27NPT	33	18.0	10.0	17	14	33
	315	08	IDNXA08L1/4NPT	0103509*	1/4-18NPT	38	23.0	15.0	17	17	42
	315	08	IDNXA08L3/8NPT	0103510*	3/8-18NPT	38	23.0	15.3	17	19	51
	315	08	IDNXA08L1/2NPT	0103511*	1/2-14NPT	44	29.0	20.0	17	22	73
	315	10	IDNXA10L1/8NPT	0103512*	1/8-27NPT	33	18.0	10.0	19	17	40
	315	10	IDNXA10L1/4NPT	0103513*	1/4-18NPT	39	24.0	15.0	19	17	47
	315	10	IDNXA10L3/8NPT	0103514*	3/8-18NPT	40	25.0	15.3	19	19	61
	315	10	IDNXA10L1/2NPT	0103515*	1/2-14NPT	45	30.0	20.0	19	22	75
	315	10	IDNXA10L3/4NPT	0103516*	3/4-14NPT	46	31.0	20.0	19	30	95
	315	12	IDNXA12L1/8NPT	0103517*	1/8-27NPT	34	19.0	10.0	22	19	55
	315	12	IDNXA12L1/4NPT	0103518*	1/4-18NPT	40	25.0	15.0	22	19	60
	315	12	IDNXA12L3/8NPT	0103519*	3/8-18NPT	40	25.0	15.3	22	19	65
	315	12	IDNXA12L1/2NPT	0103520*	1/2-14NPT	45	30.0	20.0	22	22	90
	315	15	IDNXA15L3/8NPT	0103521*	3/8-18NPT	41	26.0	15.3	27	24	100
	315	15	IDNXA15L1/2NPT	0103522*	1/2-14NPT	46	31.0	20.0	27	24	109
	315	15	IDNXA15L3/4NPT	0103523*	3/4-14NPT	47	32.0	20.0	27	30	145
	315	15	IDNXA15L1NPT	0103524*	1-11/2NPT	53	38.0	25.0	27	36	185
	315	18	IDNXA18L3/8NPT	0103525*	3/8-18NPT	43	26.5	15.3	32	27	138
	315	18	IDNXA18L1/2NPT	0103526*	1/2-14NPT	48	31.5	20.0	32	27	147
	315	18	IDNXA18L3/4NPT	0103527*	3/4-14NPT	48	31.5	20.0	32	30	171
	315	18	IDNXA18L1NPT	0103528*	1-11/2NPT	54	37.5	25.0	32	36	220
	160	22	IDNXA22L3/8NPT	0103529*	3/8-18NPT	45	28.5	15.3	36	32	178
	160	22	IDNXA22L1/2NPT	0103530*	1/2-14NPT	50	33.5	20.0	36	32	186
	160	22	IDNXA22L3/4NPT	0103531*	3/4-14NPT	50	33.5	20.0	36	32	197
	160	22	IDNXA22L1NPT	0103532*	1-11/2NPT	56	39.5	25.0	36	36	264
	160	28	IDNXA28L3/4NPT	0103533*	3/4-14NPT	51	34.5	20.0	41	41	256
	160	28	IDNXA28L1NPT	0103534*	1-11/2NPT	56	39.5	25.0	41	41	476
	160	28	IDNXA28L11/4NPT	0103535*	11/4-111/2NPT	48	41.5	25.5	41	46	496
	160	35	IDNXA35L1NPT	0103536*	1-11/2NPT	61	39.5	25.0	50	46	436
	160	35	IDNXA35L11/4NPT	0103537*	11/4-111/2NPT	62	40.5	25.5	50	46	456
	160	42	IDNXA42L11/4NPT	0103538*	11/4-111/2NPT	65	42.0	25.5	60	55	621
	160	42	IDNXA42L11/2NPT	0103539*	11/2-111/2NPT	65	42.0	26.0	60	55	616

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.

上海欧际冶金机械制造有限公司

地址: 上海市宝山区富联路1188号


电话: 021-66047188 66047818 传真: 021-66047588

B35

IDNXA

端直接头—美制锥螺纹

Male straight connecting union—American standard cone pipe thread

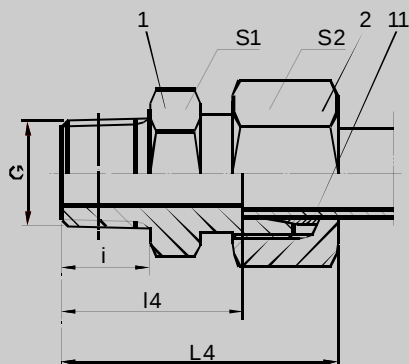

Part1—本体Male body

Part2—螺母Nut

Part11—卡套Ferrule

IDNXA

订货示例：型号为IDNXA06S1/8NPT，材料为碳钢，仅供本体和螺母时，订货号为0103601G Part1+2。

Order example: Type is IDNXA06S1/8NPT, material is carbon steel, only ordering body and nut, there reference is 0103601G Part1+2.


Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号 IDNXA	G	L4	I4	i	S2	S1	Weight 重量(g) IDNXA
S	630	06	IDNXA06S1/8NPT	0103601*	1/8-27NPT	36	21.0	10.0	17	14	40
	630	06	IDNXA06S1/4NPT	0103602*	1/4-18NPT	43	28.0	15.0	17	17	56
	630	06	IDNXA06S3/8NPT	0103603*	3/8-18NPT	41	26.0	15.3	17	19	59
	630	06	IDNXA06S1/2NPT	0103604*	1/2-14NPT	50	35.0	20.0	17	22	92
	630	08	IDNXA08S1/4NPT	0103605*	1/4-18NPT	43	28.0	15.0	19	17	61
	630	08	IDNXA08S3/8NPT	0103606*	3/8-18NPT	43	28.0	15.3	19	19	68
	630	08	IDNXA08S1/2NPT	0103607*	1/2-14NPT	50	35.0	20.0	19	22	97
	630	10	IDNXA10S1/4NPT	0103608*	1/4-18NPT	44	27.5	15.0	22	19	78
	630	10	IDNXA10S3/8NPT	0103609*	3/8-18NPT	44	27.5	15.3	22	19	82
	630	10	IDNXA10S1/2NPT	0103610*	1/2-14NPT	51	34.5	20.0	22	22	106
	630	10	IDNXA10S3/4NPT	0103611*	3/4-14NPT	53	36.5	20.0	22	30	126
	630	12	IDNXA12S1/4NPT	0103612*	1/4-18NPT	46	29.5	15.0	24	22	95
	630	12	IDNXA12S3/8NPT	0103613*	3/8-18NPT	46	29.5	15.3	24	22	100
	630	12	IDNXA12S1/2NPT	0103614*	1/2-14NPT	51	34.5	20.0	24	22	147
	630	12	IDNXA12S3/4NPT	0103615*	3/4-14NPT	53	36.5	20.0	24	30	169
	630	14	IDNXA14S3/8NPT	0103616*	3/8-18NPT	49	23.0	15.3	27	24	142
	630	14	IDNXA14S1/2NPT	0103617*	1/2-14NPT	54	36.0	20.0	27	24	147
	630	14	IDNXA14S3/4NPT	0103618*	3/4-14NPT	56	38.0	20.0	27	30	189
	630	14	IDNXA14S1NPT	0103619*	1-111/2NPT	63	45.0	25.0	27	36	240
	400	16	IDNXA16S1/2NPT	0103620*	1/2-14NPT	54	35.5	20.0	30	27	168
	400	16	IDNXA16S3/8NPT	0103621*	3/8-18NPT	49	30.5	15.3	30	27	156
	400	16	IDNXA16S3/4NPT	0103622*	3/4-14NPT	56	37.5	20.0	30	30	209
	400	16	IDNXA16S1NPT	0103623*	1-111/2NPT	63	44.5	25.0	30	36	250
	400	20	IDNXA20S1/2NPT	0103624*	1/2-14NPT	59	37.5	20.0	36	32	168
	400	20	IDNXA20S3/4NPT	0103625*	3/4-14NPT	59	37.5	20.0	36	32	263
	400	20	IDNXA20S1NPT	0103626*	1-111/2NPT	66	44.5	25.0	36	36	362
	400	25	IDNXA25S3/4NPT	0103627*	3/4-14NPT	64	40.0	20.0	46	41	455
	400	25	IDNXA25S1NPT	0103628*	1-111/2NPT	69	45.0	25.0	46	41	493
	400	25	IDNXA25S11/4NPT	0103629*	11/4-111/2NPT	70	46.0	25.5	46	46	627
	400	25	IDNXA25S11/2NPT	0103630*	11/2-111/2NPT	73	49.0	26.0	46	50	772
	400	30	IDNXA30S3/4NPT	0103631*	3/4-14NPT	67	40.5	20.0	50	46	558
	400	30	IDNXA30S1NPT	0103632*	1-111/2NPT	72	45.5	25.0	50	46	600
	400	30	IDNXA30S11/4NPT	0103633*	11/4-111/2NPT	73	46.5	25.5	50	46	635
	400	30	IDNXA30S11/2NPT	0103634*	11/2-111/2NPT	73	46.5	26.0	50	50	675
	315	38	IDNXA38S1NPT	0103635*	1-111/2NPT	79	48.0	25.0	60	55	871
	315	38	IDNXA38S11/4NPT	0103636*	11/4-111/2NPT	80	49.0	25.5	60	55	896
	315	38	IDNXA38S11/2NPT	0103637*	11/2-111/2NPT	80	49.0	26.0	60	55	932

*材料：G—碳钢；B—不锈钢；T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.

IDNXB

端直通过接头—美制锥螺纹

Male straight connecting union—American standard cone pipe thread

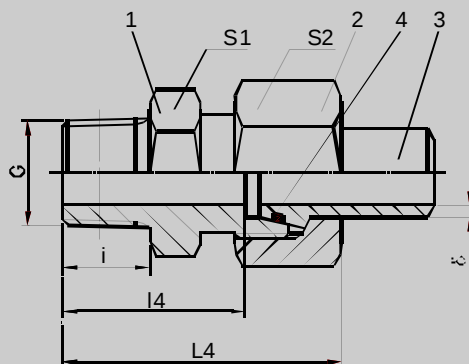

- Part1—本体Male body
Part2—螺母Nut
Part3—焊接头Welding cone
Part4—O形圈O-ring

IDNXB

订货示例：型号为IDNXB06× $\frac{1}{8}$ L1/8NPT，材料为碳钢，仅供本体和螺母时，订货号为0103701G Part1+2。
Order example: Type is IDNXB06× $\frac{1}{8}$ L1/8NPT, material is carbon steel, only ordering body and nut, the reference is 0103701G Part1+2.

Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号 IDNXB	G	L4	L4	i	S2	S1	Weight 重量(g) IDNXB
L	315	06	IDNXB06× $\frac{1}{8}$ L1/8NPT	0103701*	1/8-27NPT	32	17.0	10.0	14	12	31
	315	06	IDNXB06× $\frac{1}{8}$ L1/4NPT	0103702*	1/4-18NPT	38	23.0	15.0	14	17	45
	315	06	IDNXB06× $\frac{1}{8}$ L3/8NPT	0103703*	3/8-18NPT	38	23.0	15.3	14	19	51
	315	06	IDNXB06× $\frac{1}{8}$ L1/2NPT	0103704*	1/2-14NPT	44	29.0	20.0	14	22	72
	315	08	IDNXB08× $\frac{1}{8}$ L1/8NPT	0103705*	1/8-27NPT	33	18.0	10.0	17	14	44
	315	08	IDNXB08× $\frac{1}{8}$ L1/4NPT	0103706*	1/4-18NPT	38	23.0	15.0	17	17	53
	315	08	IDNXB08× $\frac{1}{8}$ L3/8NPT	0103707*	3/8-18NPT	38	23.0	15.3	17	19	62
	315	08	IDNXB08× $\frac{1}{8}$ L1/2NPT	0103708*	1/2-14NPT	44	29.0	20.0	17	22	84
	315	10	IDNXB10× $\frac{1}{8}$ L1/8NPT	0103709*	1/8-27NPT	33	18.0	10.0	19	17	56
	315	10	IDNXB10× $\frac{1}{8}$ L1/4NPT	0103710*	1/4-18NPT	39	24.0	15.0	19	17	63
	315	10	IDNXB10× $\frac{1}{8}$ L3/8NPT	0103711*	3/8-18NPT	40	25.0	15.3	19	19	77
	315	10	IDNXB10× $\frac{1}{8}$ L1/2NPT	0103712*	1/2-14NPT	45	30.0	20.0	19	22	91
	315	10	IDNXB10× $\frac{1}{8}$ L3/4NPT	0103713*	3/4-14NPT	46	31.0	20.0	19	30	111
	315	12	IDNXB12× $\frac{1}{8}$ L1/8NPT	0103714*	1/8-27NPT	34	19.0	10.0	22	19	77
	315	12	IDNXB12× $\frac{1}{8}$ L1/4NPT	0103715*	1/4-18NPT	40	25.0	15.0	22	19	82
	315	12	IDNXB12× $\frac{1}{8}$ L3/8NPT	0103716*	3/8-18NPT	40	25.0	15.3	22	19	87
	315	12	IDNXB12× $\frac{1}{8}$ L1/2NPT	0103717*	1/2-14NPT	45	30.0	20.0	22	22	112
	315	15	IDNXB15× $\frac{1}{8}$ L3/8NPT	0103718*	3/8-18NPT	41	26.0	15.3	27	24	131
	315	15	IDNXB15× $\frac{1}{8}$ L1/2NPT	0103719*	1/2-14NPT	46	31.0	20.0	27	24	140
	315	15	IDNXB15× $\frac{1}{8}$ L3/4NPT	0103720*	3/4-14NPT	47	32.0	20.0	27	30	176
	315	15	IDNXB15× $\frac{1}{8}$ L1NPT	0103721*	1-111/2NPT	53	38.0	25.0	27	36	216
	315	18	IDNXB18× $\frac{1}{8}$ L3/8NPT	0103722*	3/8-18NPT	43	26.5	15.3	32	27	175
	315	18	IDNXB18× $\frac{1}{8}$ L1/2NPT	0103723*	1/2-14NPT	48	31.5	20.0	32	27	184
	315	18	IDNXB18× $\frac{1}{8}$ L3/4NPT	0103724*	3/4-14NPT	48	31.5	20.0	32	30	208
	315	18	IDNXB18× $\frac{1}{8}$ L1NPT	0103725*	1-111/2NPT	54	37.5	25.0	32	36	257
	160	22	IDNXB22× $\frac{1}{8}$ L3/8NPT	0103726*	3/8-18NPT	45	28.5	15.3	36	32	229
	160	22	IDNXB22× $\frac{1}{8}$ L1/2NPT	0103727*	1/2-14NPT	50	33.5	20.0	36	32	237
	160	22	IDNXB22× $\frac{1}{8}$ L3/4NPT	0103728*	3/4-14NPT	50	33.5	20.0	36	32	248
	160	22	IDNXB22× $\frac{1}{8}$ L1NPT	0103729*	1-111/2NPT	56	39.5	25.0	36	36	315
	160	28	IDNXB28× $\frac{1}{8}$ L3/4NPT	0103730*	3/4-14NPT	51	34.5	20.0	41	41	344
	160	28	IDNXB28× $\frac{1}{8}$ L1NPT	0103731*	1-111/2NPT	56	39.5	25.0	41	41	564
	160	28	IDNXB28× $\frac{1}{8}$ L11/4NPT	0103732*	11/4-111/2NPT	48	41.5	25.5	41	46	584
	160	35	IDNXB35× $\frac{1}{8}$ L1NPT	0103733*	1-111/2NPT	61	39.5	25.0	50	46	586
	160	35	IDNXB35× $\frac{1}{8}$ L11/4NPT	0103734*	11/4-111/2NPT	62	40.5	25.5	50	46	606
	160	42	IDNXB42× $\frac{1}{8}$ L11/4NPT	0103735*	11/4-111/2NPT	65	42.0	25.5	60	55	811
	160	42	IDNXB42× $\frac{1}{8}$ L11/2NPT	0103736*	11/2-111/2NPT	65	42.0	26.0	60	55	806

*材料：G—碳钢；B—不锈钢。 *Material: G—Carbon steel; B—Stainless steel.

上海欧际冶金机械制造有限公司

地址：上海市宝山区富联路1188号


电话：021-66047188 66047818 传真：021-66047588

B37

IDNXB

端直接头—美制锥螺纹

Male straight connecting union—American standard cone pipe thread

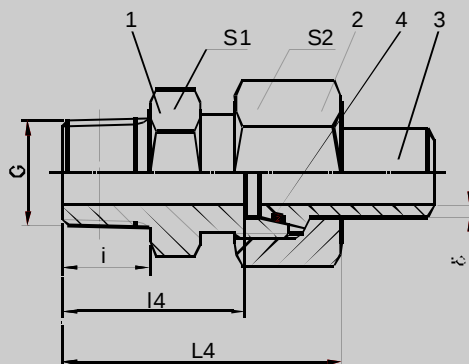

- Part1—本体Male body
Part2—螺母Nut
Part3—焊接头Welding cone
Part4—O形圈O-ring

IDNXB

订货示例：型号为IDNXB06× $\frac{1}{8}$ S1/8NPT，材料为碳钢，仅供本体和螺母时，订货号为0103801G Part1+2。
Order example: Type is IDNXB06× $\frac{1}{8}$ S1/8NPT, material is carbon steel, only ordering body and nut, the reference is 0103801G Part1+2.


Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号							Weight 重量(g)
				IDNXB	G	L4	I4	i	S2	S1	IDNXB
S	630	06	IDNXB06× 3/8 S1/8NPT	0103801*	1/8-27NPT	36	21.0	10.0	17	14	47
	630	06	IDNXB06× 3/8 S1/4NPT	0103802*	1/4-18NPT	43	28.0	15.0	17	17	63
	630	06	IDNXB06× 3/8 S3/8NPT	0103803*	3/8-18NPT	41	26.0	15.3	17	19	66
	630	06	IDNXB06× 3/8 S1/2NPT	0103804*	1/2-14NPT	50	35.0	20.0	17	22	99
	630	08	IDNXB08× 3/8 S1/4NPT	0103805*	1/4-18NPT	43	28.0	15.0	19	17	72
	630	08	IDNXB08× 3/8 S3/8NPT	0103806*	3/8-18NPT	43	28.0	15.3	19	19	79
	630	08	IDNXB08× 3/8 S1/2NPT	0103807*	1/2-14NPT	50	35.0	20.0	19	22	108
	630	10	IDNXB10× 3/8 S1/4NPT	0103808*	1/4-18NPT	44	27.5	15.0	22	19	94
	630	10	IDNXB10× 3/8 S3/8NPT	0103809*	3/8-18NPT	44	27.5	15.3	22	19	98
	630	10	IDNXB10× 3/8 S1/2NPT	0103810*	1/2-14NPT	51	34.5	20.0	22	22	112
	630	10	IDNXB10× 3/8 S3/4NPT	0103811*	3/4-14NPT	53	36.5	20.0	22	30	142
	630	12	IDNXB12× 3/8 S1/4NPT	0103812*	1/4-18NPT	46	29.5	15.0	24	22	117
	630	12	IDNXB12× 3/8 S3/8NPT	0103813*	3/8-18NPT	46	29.5	15.3	24	22	122
	630	12	IDNXB12× 3/8 S1/2NPT	0103814*	1/2-14NPT	51	34.5	20.0	24	22	169
	630	12	IDNXB12× 3/8 S3/4NPT	0103815*	3/4-14NPT	53	36.5	20.0	24	30	191
	630	14	IDNXB14× 3/8 S3/8NPT	0103816*	3/8-18NPT	49	23.0	15.3	27	24	175
	630	14	IDNXB14× 3/8 S1/2NPT	0103817*	1/2-14NPT	54	36.0	20.0	27	24	180
	630	14	IDNXB14× 3/8 S3/4NPT	0103818*	3/4-14NPT	56	38.0	20.0	27	30	222
	630	14	IDNXB14× 3/8 S1NPT	0103819*	1-111/2NPT	63	45.0	25.0	27	36	273
	400	16	IDNXB16× 3/8 S1/2NPT	0103820*	1/2-14NPT	54	35.5	20.0	30	27	209
	400	16	IDNXB16× 3/8 S3/8NPT	0103821*	3/8-18NPT	49	30.5	15.3	30	27	197
	400	16	IDNXB16× 3/8 S3/4NPT	0103822*	3/4-14NPT	56	37.5	20.0	30	30	250
	400	16	IDNXB16× 3/8 S1NPT	0103823*	1-111/2NPT	63	44.5	25.0	30	36	291
	400	20	IDNXB20× 3/8 S1/2NPT	0103824*	1/2-14NPT	59	37.5	20.0	36	32	246
	400	20	IDNXB20× 3/8 S3/4NPT	0103825*	3/4-14NPT	59	37.5	20.0	36	32	341
	400	20	IDNXB20× 3/8 S1NPT	0103826*	1-111/2NPT	66	44.5	25.0	36	36	340
	400	25	IDNXB25× 3/8 S3/4NPT	0103827*	3/4-14NPT	64	40.0	20.0	46	41	580
	400	25	IDNXB25× 3/8 S1NPT	0103828*	1-111/2NPT	69	45.0	25.0	46	41	513
	400	25	IDNXB25× 3/8 S11/4NPT	0103829*	11/4-111/2NPT	70	46.0	25.5	46	46	752
	400	25	IDNXB25× 3/8 S11/2NPT	0103830*	11/2-111/2NPT	73	49.0	26.0	46	50	897
	400	30	IDNXB30× 3/8 S3/4NPT	0103831*	3/4-14NPT	67	40.5	20.0	50	46	746
	400	30	IDNXB30× 3/8 S1NPT	0103832*	1-111/2NPT	72	45.5	25.0	50	46	788
	400	30	IDNXB30× 3/8 S11/4NPT	0103833*	11/4-111/2NPT	73	46.5	25.5	50	46	823
	400	30	IDNXB30× 3/8 S11/2NPT	0103834*	11/2-111/2NPT	73	46.5	26.0	50	50	863
	315	38	IDNXB38× 3/8 S1NPT	0103835*	1-111/2NPT	79	48.0	25.0	60	55	1174
	315	38	IDNXB38× 3/8 S11/4NPT	0103836*	11/4-111/2NPT	80	49.0	25.5	60	55	1199
	315	38	IDNXB38× 3/8 S11/2NPT	0103837*	11/2-111/2NPT	80	49.0	26.0	60	55	1235

*材料: G—碳钢; B—不锈钢。 *Material: G—Carbon steel; B—Stainless steel.

IDGUC

端直通组合接头—英制螺纹U型密封

Male straight adjustable connecting union—British standard thread with U-ring seal

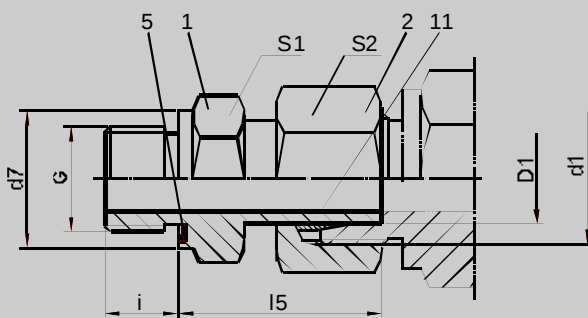

Part1—本体Malebody

Part2—螺母Nut

Part5—U形圈U-ring

Part11—卡套Ferrule

IDGUC

订货示例：型号为IDGUC06L，材料为碳钢，仅供本体和螺母时，订货号为0103901G Part1+2。

Order example: Type is IDGUC06L, material is carbon steel, only ordering body and nut, the reference is 0103901G Part1+2.

Series 系列	PN	Tube O D 管子外径 D1	Type 型号	Reference 订货号 IDGUC	G	l5	d1	i	S2	S1	d7	Weight 重量(g) IDGUC
L	315	06	IDGUC06L	0103901*	G1/8A	24.5	M12×1.5	8	14	14	14	24
	315	08	IDGUC08L	0103902*	G1/4A	29.5	M14×1.5	12	17	19	19	52
	315	10	IDGUC10L	0103903*	G1/4A	27.5	M16×1.5	12	19	19	19	47
	315	12	IDGUC12L	0103904*	G3/8A	34.0	M18×1.5	12	22	22	22	87
	315	12	IDGUC12LG1/4A	0103905*	G1/4A	28.5	M18×1.5	12	22	19	19	61
	315	12	IDGUC12LD1/2A	0103906*	G1/2A	34.5	M18×1.5	14	22	27	27	121
	315	15	IDGUC15L	0103907*	G1/2A	31.0	M22×1.5	14	27	27	27	114
	315	18	IDGUC18L	0103908*	G1/2A	31.5	M26×1.5	14	32	27	27	132
	160	22	IDGUC22L	0103909*	G3/4A	32.5	M30×2	16	36	32	32	183
	160	28	IDGUC28L	0103910*	G1A	35.0	M36×2	18	41	41	40	262
S	160	35	IDGUC35L	0103911*	G11/4A	42.5	M45×2	20	50	50	50	436
	160	42	IDGUC42L	0103912*	G11/2A	46.5	M52×2	22	60	55	55	615
	630	06	IDGUC06S	0103913*	G1/4A	27.0	M14×1.5	12	17	19	19	48
	630	08	IDGUC08S	0103914*	G1/4A	29.5	M16×1.5	12	19	19	19	57
	630	10	IDGUC10S	0103915*	G3/8A	32.0	M18×1.5	12	22	22	22	84
	630	12	IDGUC12S	0103916*	G3/8A	34.0	M20×1.5	12	24	22	22	95
	630	12	IDGUC12SG1/2A	0103917*	G1/2A	34.5	M20×1.5	14	24	27	27	130
	630	14	IDGUC14S	0103918*	G1/2A	36.5	M22×1.5	14	27	27	27	149
	400	16	IDGUC16S	0103919*	G1/2A	37.0	M24×1.5	14	30	27	27	158
	400	16	IDGUC16SG3/4A	0103920*	G3/4A	39.0	M24×1.5	16	30	32	32	222
	400	20	IDGUC20S	0103921*	G3/4A	43.0	M30×2	16	36	32	32	254
	400	25	IDGUC25S	0103922*	G1A	48.0	M36×2	18	46	41	40	485
	400	30	IDGUC30S	0103923*	G11/4A	51.0	M42×2	20	50	50	50	661
	315	38	IDGUC38S	0103924*	G11/2A	60.0	M52×2	22	60	55	55	962

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.

上海欧际冶金机械制造有限公司

地址: 上海市宝山区富联路1188号


电话: 021-66047188 66047818 传真: 021-66047588

B39

IDGUW

端直通组合接头—英制螺纹U型密封

Male straight adjustable connecting union—British standard thread with U-ring seal

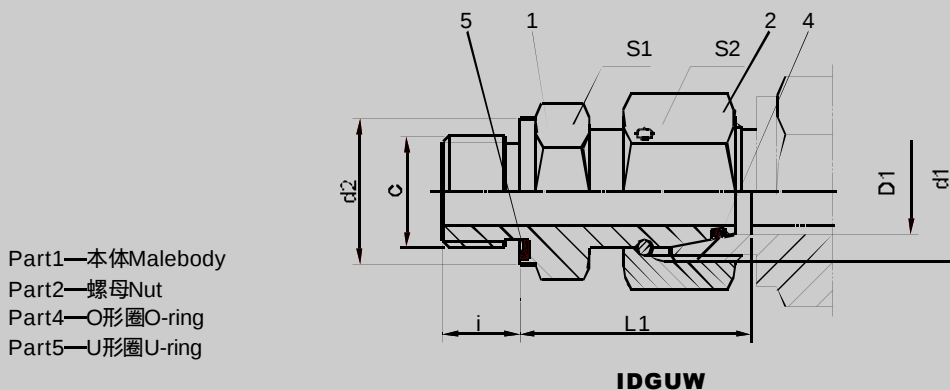

订货示例：型号为IDGUW06L，材料为碳钢，仅供本体和螺母时，订货号为0104001G Part1+2。


Order example: Type is IDGUW06L, material is carbon steel, only ordering body and nut, the reference is 0104001G Part1+2.

Series 系列	PN	Tube O D 管子外径 D1	Type 型号	Reference 订货号 IDGUW	G	L1	d1	i	S2	S1	d2	Weight 重量(g) IDGUW
L	315	06	IDGUW06L	0104001*	G1/8A	24.5	M12×1.5	8	14	14	14	27
	315	08	IDGUW08L	0104002*	G1/4A	29.5	M14×1.5	12	17	19	19	26
	315	10	IDGUW10L	0104003*	G1/4A	27.5	M16×1.5	12	19	19	19	54
	315	10	IDGUW10L/G3/8A	0104004*	G3/8A	29.0	M16×1.5	12	19	22	22	70
	315	12	IDGUW12L	0104005*	G3/8A	34.0	M18×1.5	12	22	22	22	95
	315	12	IDGUW12L/G1/4A	0104006*	G1/4A	27.5	M18×1.5	12	22	19	19	65
	315	12	IDGUW12L/G1/2A	0104007*	G1/2A	29.5	M18×1.5	14	22	27	27	114
	315	15	IDGUW15L	0104008*	G1/2A	32.0	M22×1.5	14	27	27	27	137
	315	18	IDGUW18L	0104009*	G1/2A	31.5	M26×1.5	14	32	27	27	143
	160	18	IDGUW18L/G3/4A	0104010*	G3/4A	29.5	M26×1.5	16	32	32	32	182
	160	22	IDGUW22L	0104011*	G3/4A	32.5	M30×2	16	36	32	32	200
	160	28	IDGUW28L	0104012*	G1A	35.0	M36×2	18	41	41	40	289
	160	35	IDGUW35L	0104013*	G11/4A	42.5	M45×2	20	50	50	50	500
	160	42	IDGUW42L	0104014*	G11/2A	46.5	M52×2	22	60	55	55	718
S	630	06	IDGUW06S	0104015*	G1/4A	27.0	M14×1.5	12	17	19	19	53
	630	08	IDGUW08S	0104016*	G1/4A	29.5	M16×1.5	12	19	19	19	64
	630	10	IDGUW10S	0104017*	G3/8A	32.0	M18×1.5	12	22	22	22	93
	630	12	IDGUW12S	0104018*	G3/8A	34.0	M20×1.5	12	24	22	22	100
	630	12	IDGUW12S/G1/4A	0104019*	G1/4A	31.5	M20×1.5	12	24	19	19	140
	630	12	IDGUW12S/G1/2A	0104020*	G1/2A	35.0	M20×1.5	14	24	27	27	140
	630	14	IDGUW14S	0104021*	G1/2A	36.5	M22×1.5	14	27	27	27	157
	400	16	IDGUW16S	0104022*	G1/2A	37.0	M24×1.5	14	30	27	27	170
	400	20	IDGUW20S	0104023*	G3/4A	43.0	M30×2	16	36	32	32	273
	400	25	IDGUW25S	0104024*	G1A	48.0	M36×2	18	46	41	40	493
	400	30	IDGUW30S	0104025*	G11/4A	51.0	M42×2	20	50	50	50	691
	315	38	IDGUW38S	0104026*	G11/2A	60.0	M52×2	22	60	55	55	934

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.

端直通组合接头—公制螺纹U型密封

Male straight adjustable connecting union—Metric thread with U-ring seal

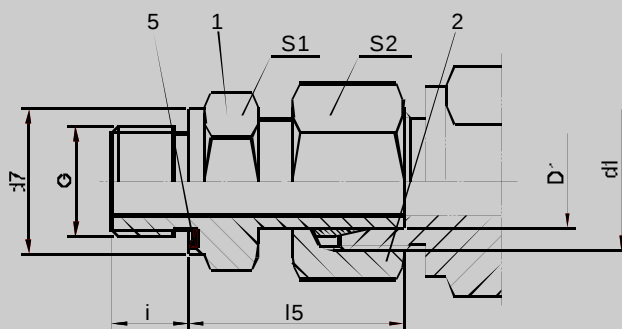

IDMUC

Part1一本体Malebody

Part2—螺母Nut

Part5—U形圈U-ring

订货示例: 型号为IDMUC06L, 材料为碳钢, 仅供本体和螺母时, 订货号为0104101G Part1+2。

Orderexample:Typeis IDMUC06L,materialiscarbonsteel,onlyorderingbodyandnut,thereferenceis0104101G Part1+2.

Series 系列	Tube O D 管子外径		Type 型号	Reference 订货号									Weight 重量(g)
	PN	D1		IDMUC	G	I5	d1	i	S2	S1	d7	IDMUC	
L	315	06	IDMUC06L	0104101*	M10×1	24.5	M12×1.5	8	14	14	14	24	
	315	08	IDMUC08L	0104102*	M12×1.5	26.5	M14×1.5	12	17	17	17	38	
	315	10	IDMUC10L	0104103*	M14×1.5	27.5	M16×1.5	12	19	19	19	49	
	315	12	IDMUC12L	0104104*	M16×1.5	30.0	M18×1.5	12	22	22	22	67	
	315	15	IDMUC15L	0104105*	M18×1.5	30.5	M22×1.5	12	27	24	24	95	
	315	18	IDMUC18L	0104106*	M22×1.5	31.5	M26×1.5	14	32	27	27	137	
	160	22	IDMUC22L	0104107*	M26×1.5	32.5	M30×2	16	36	32	32	183	
	160	28	IDMUC28L	0104108*	M33×2	35.0	M36×2	18	41	41	40	264	
	160	35	IDMUC35L	0104109*	M42×2	42.5	M45×2	20	50	50	50	444	
	160	42	IDMUC42L	0104110*	M48×2	46.5	M52×2	22	60	55	55	614	
S	630	06	IDMUC06S	0104111*	M12×1.5	27.0	M14×1.5	12	17	17	17	43	
	630	08	IDMUC08S	0104112*	M14×1.5	29.5	M16×1.5	12	19	19	19	59	
	630	10	IDMUC10S	0104113*	M16×1.5	32.0	M18×1.5	12	22	22	22	82	
	630	12	IDMUC12S	0104114*	M18×1.5	34.0	M20×1.5	12	24	24	24	104	
	630	14	IDMUC14S	0104115*	M20×1.5	36.5	M22×1.5	14	27	27	26	144	
	400	16	IDMUC16S	0104116*	M22×1.5	37.0	M24×1.5	14	30	27	27	162	
	400	20	IDMUC20S	0104117*	M27×2	43.0	M30×2	16	36	32	32	254	
	400	25	IDMUC25S	0104118*	M33×2	48.0	M36×2	18	46	41	40	493	
	400	30	IDMUC30S	0104119*	M42×2	51.0	M42×2	20	50	50	50	654	
	315	38	IDMUC38S	0104120*	M48×2	60.0	M52×2	22	60	55	55	962	

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbonsteel; B—Stainlesssteel; T—brass.

上海欧际冶金机械制造有限公司

地址：上海市宝山区富联路1188号


电话: 021-66047188 66047818 传真: 021-66047588

B41

IDMUW

端直通组合接头—公制螺纹U型密封

Male straight adjustable connecting union—Metric thread with U-ring seal

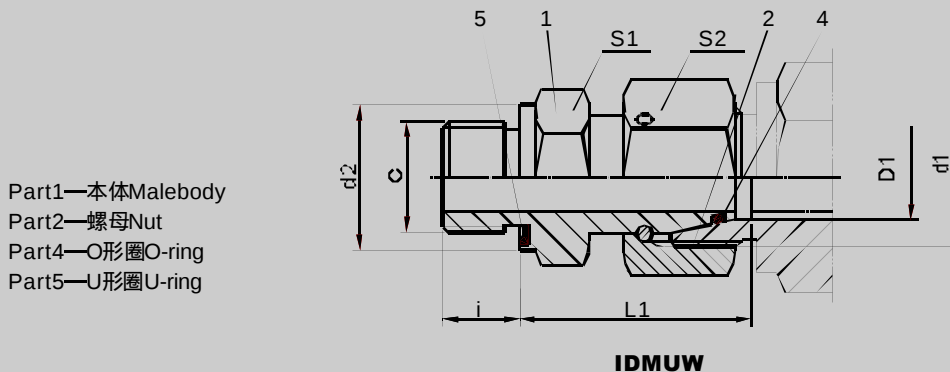

Part1—本体Male body
Part2—螺母Nut
Part4—O形圈O-ring
Part5—U形圈U-ring

订货示例：型号为IDMUW06L，材料为碳钢，仅供本体和螺母时，订货号为0104201G Part1+2。

Order example: Type is IDMUW06L, material is carbon steel, only ordering body and nut, the reference is 0104201G Part1+2.


Series 系列	PN	Tube OD 管子外径 D1	Type 型号	Reference 订货号 IDMUW	G	L1	d1	i	S2	S1	d2	Weight 重量(g) IDMUW
L	315	06	IDMUW06L	0104201*	M10×1	24.5	M12×1.5	8	14	14	14	27
	315	08	IDMUW08L	0104202*	M12×1.5	26.5	M14×1.5	12	17	17	17	45
	315	10	IDMUW10L	0104203*	M14×1.5	27.5	M16×1.5	12	19	19	19	57
	315	12	IDMUW12L	0104204*	M16×1.5	30.5	M18×1.5	12	22	22	22	82
	315	12	IDMUW12LM22×1.5	0104205*	M22×1.5	27.0	M18×1.5	14	22	27	27	92
	315	15	IDMUW15L	0104206*	M18×1.5	31.5	M22×1.5	12	27	24	24	113
	315	15	IDMUW15LM22×1.5	0104207*	M22×1.5	32.0	M22×1.5	14	27	27	27	142
	315	18	IDMUW18L	0104208*	M22×1.5	31.5	M26×1.5	14	32	27	27	148
	160	22	IDMUW22L	0104209*	M26×1.5	32.5	M30×2	16	36	32	32	203
	160	28	IDMUW28L	0104210*	M33×2	35.0	M36×2	18	41	41	40	289
S	160	35	IDMUW35L	0104211*	M42×2	42.5	M45×2	20	50	50	50	511
	160	42	IDMUW42L	0104212*	M48×2	46.5	M52×2	22	60	55	55	711
	630	06	IDMUW06S	0104213*	M12×1.5	27.0	M14×1.5	12	17	17	17	47
	630	08	IDMUW08S	0104214*	M14×1.5	29.5	M16×1.5	12	19	19	19	65
	630	10	IDMUW10S	0104215*	M16×1.5	32.0	M18×1.5	12	22	22	22	91
	630	12	IDMUW12S	0104216*	M18×1.5	34.0	M20×1.5	12	24	24	24	112
	630	14	IDMUW14S	0104217*	M20×1.5	36.5	M22×1.5	14	27	27	26	153
	400	16	IDMUW16S	0104218*	M22×1.5	37.0	M24×1.5	14	30	27	27	174
	400	20	IDMUW20S	0104219*	M27×2	43.0	M30×2	16	36	32	32	274
	400	25	IDMUW25S	0104220*	M33×2	48.0	M36×2	18	46	41	40	497
	400	30	IDMUW30S	0104221*	M42×2	51.0	M42×2	20	50	50	50	691
	315	38	IDMUW38S	0104222*	M48×2	60.0	M52×2	22	60	55	55	957

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.

IDMQW

端直通组合接头—公制螺纹O型圈密封

Male straight adjustable connecting union—Metric thread with O-ring seal

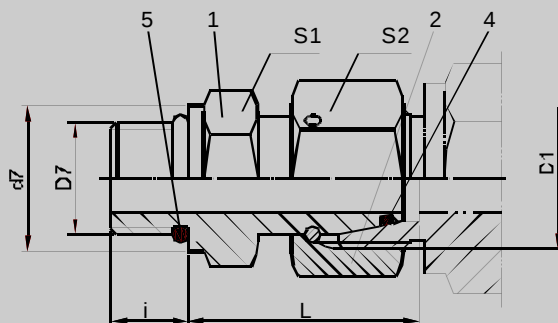

Part1—本体Male body

Part2—螺母Nut

Part4—O形圈O-ring

Part5—O形圈O-ring

IDMQW

订货示例：型号为IDMQW06L，材料为碳钢，仅供本体和螺母时，订货号为0104301G Part1+2。

Order example: Type is IDMQW06L, material is carbon steel, only ordering body and nut, the reference is 0104301G Part1+2.

Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号 IDMQW	D7	L	D1	i	S2	S1	d7	Weight 重量(g) IDMQW
L	315	06	IDMQW06L	0104301*	M10×1	24.5	M12×1.5	8.5	14	14	13.8	29
	315	08	IDMQW08L	0104302*	M12×1.5	26.5	M14×1.5	11.0	17	17	16.8	43
	315	10	IDMQW10L	0104303*	M14×1.5	27.5	M16×1.5	11.0	19	19	18.8	57
	315	12	IDMQW12L	0104304*	M16×1.5	30.5	M18×1.5	11.5	22	22	21.8	85
	315	15	IDMQW15L	0104305*	M18×1.5	31.5	M22×1.5	12.5	27	24	23.8	115
	315	18	IDMQW18L	0104306*	M22×1.5	31.5	M26×1.5	13.0	32	27	26.8	152
	160	22	IDMQW22L	0104307*	M27×2	32.5	M30×2	16.0	36	32	31.8	207
	160	28	IDMQW28L	0104308*	M33×2	35.0	M36×2	16.0	41	41	40.8	294
	160	35	IDMQW35L	0104309*	M42×2	42.5	M45×2	16.0	50	50	49.8	516
S	160	42	IDMQW42L	0104310*	M48×2	46.5	M52×2	17.5	60	55	54.8	718
	630	06	IDMQW06S	0104311*	M12×1.5	27.0	M14×1.5	11.0	17	17	16.8	49
	630	08	IDMQW08S	0104312*	M14×1.5	29.5	M16×1.5	11.0	19	19	18.8	69
	630	10	IDMQW10S	0104313*	M16×1.5	32.0	M18×1.5	12.5	22	22	21.8	96
	630	12	IDMQW12S	0104314*	M18×1.5	34.0	M20×1.5	14.0	24	24	23.8	116
	400	16	IDMQW16S	0104315*	M22×1.5	37.0	M24×1.5	15.0	30	27	26.8	179
	400	20	IDMQW20S	0104316*	M27×2	43.0	M30×2	18.5	36	32	31.8	280
	400	25	IDMQW25S	0104317*	M33×2	48.0	M36×2	18.5	46	41	40.8	502
	400	30	IDMQW30S	0104318*	M42×2	51.0	M45×2	19.0	50	50	49.8	697
	315	38	IDMQW38S	0104319*	M48×2	60.0	M52×2	21.5	60	55	54.8	965

*材料：G—碳钢；B—不锈钢；T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.

上海欧际冶金机械制造有限公司


地址：上海市宝山区富联路1188号

电话：021-66047188 66047818 传真：021-66047588

IDNXW

端直通组合接头—美制锥螺纹

Male straight adjustable connecting union—American standard cone pipe thread

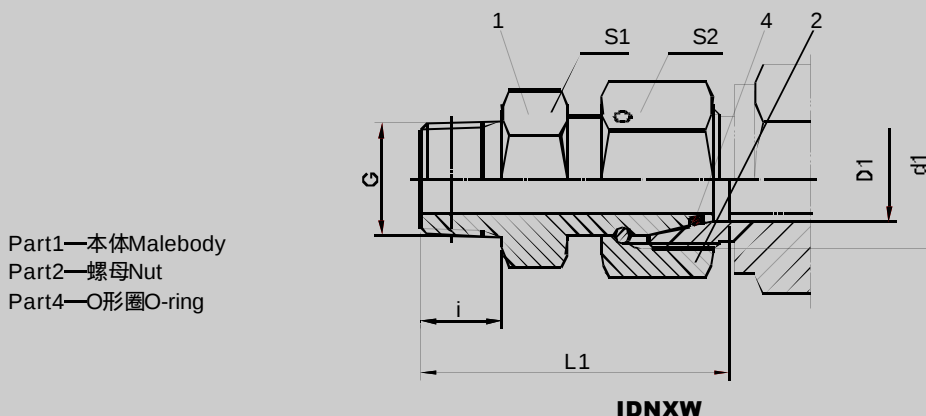

Part1—本体Male body
Part2—螺母Nut
Part4—O形圈O-ring

订货示例：型号为IDNXW06L，材料为碳钢，仅供本体和螺母时，订货号为0104401G Part1+2。
Order example: Type is IDNXW06L, material is carbon steel, only ordering body and nut, the reference is 0104401G Part1+2.



Series 系列	PN	Tube OD 管子外径 D1	Type 型号	Reference 订货号 IDNXW	G	L1	d1	i	S2	S1	Weight 重量(g) IDNXW
L	315	06	IDNXW06L	0104401*	1/8-27NPT	31.5	M12×1.5	10.0	14	11	23
	315	08	IDNXW08L	0104402*	1/4-18NPT	37.5	M14×1.5	15.0	17	14	41
	315	10	IDNXW10L	0104403*	1/4-18NPT	38.0	M16×1.5	15.0	19	14	44
	315	12	IDNXW12L	0104404*	3/8-18NPT	40.0	M18×1.5	15.3	22	19	69
	315	15	IDNXW15L	0104405*	1/2-14NPT	49.5	M22×1.5	20.0	27	22	127
	315	18	IDNXW18L	0104406*	1/2-14NPT	49.0	M26×1.5	20.0	32	24	142
	160	22	IDNXW22L	0104407*	3/4-14NPT	52.0	M30×2	20.0	36	27	200
	160	28	IDNXW28L	0104408*	1-11/2NPT	61.0	M36×2	25.0	41	36	306
	160	35	IDNXW35L	0104409*	11/4-11/2NPT	65.5	M45×2	25.5	50	46	486
	160	42	IDNXW42L	0104410*	11/2-11/2NPT	68.5	M52×2	26.0	60	50	662
S	630	06	IDNXW06S	0104411*	1/4-18NPT	37.5	M14×1.5	15.0	17	14	42
	630	08	IDNXW08S	0104412*	1/4-18NPT	38.0	M16×1.5	15.0	19	14	47
	630	10	IDNXW10S	0104413*	3/8-18NPT	40.5	M18×1.5	15.3	22	19	75
	630	12	IDNXW12S	0104414*	3/8-18NPT	42.0	M20×1.5	15.3	24	19	81
	630	14	IDNXW14S	0104415*	1/2-14NPT	50.5	M22×1.5	20.0	27	22	131
	400	16	IDNXW16S	0104416*	1/2-14NPT	51.0	M24×1.5	20.0	30	22	145
	400	20	IDNXW20S	0104417*	3/4-14NPT	54.0	M30×2	20.0	36	27	221
	400	25	IDNXW25S	0104418*	1-11/2NPT	63.5	M36×2	25.0	46	36	422
	400	30	IDNXW30S	0104419*	11/4-11/2NPT	70.5	M42×2	25.5	50	46	628
	315	38	IDNXW38S	0104420*	11/2-11/2NPT	73.5	M52×2	26.0	60	50	770

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.

IAXXA IBXXB

直通接头

Straightunion

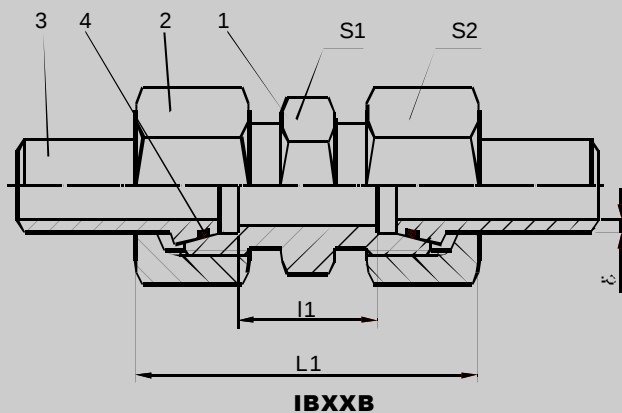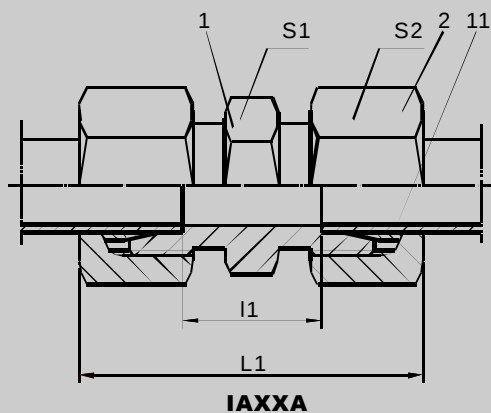

Part1—本体Threadedbranch

Part2—螺母Nut

Part3—焊接头Weldingcone

Part4—O形圈O-ring

Part11—卡套Ferrule

订货示例：型号为IAXXA04LL，材料为碳钢，仅供本体和螺母时，订货号为0204501G Part1+2。

Orderexample:Typeis IAXXA04LL,materialiscarbonsteel,onlyorderingthreadedbranchandnut,thereferenceis0204501G Part1+2.

Series 系列	PN	Tube OD 管子外径	Type 型号	Reference 订货号		L1	l1	S2	S1	Weight 重量(g)	
				IAXXA	IBXXB					IAXXA	IBXXB
LL	100	04	IAXXA04LL	0204501*		31	12	10	9	15	
	100	06	IAXXA06LL	0204502*		32	9	12	11	20	
	100	08	IAXXA08LL	0204503*		35	12	14	12	25	
	100	10	IAXXA10LL	0204504*		35	12	17	14	38	
	100	12	IAXXA12LL	0204505*		35	11	19	17	45	
L	315	06	IAXXA06L IBXXB06× δ L	0204506*	0204526*	39	10	14	12	35	49
	315	08	IAXXA08L IBXXB08× δ L	0204507*	0204527*	40	11	17	14	51	73
	315	10	IAXXA10L IBXXB10× δ L	0204508*	0204528*	42	13	19	17	65	97
	315	12	IAXXA12L IBXXB12× δ L	0204509*	0204529*	43	14	22	19	86	130
	315	15	IAXXA15L IBXXB15× δ L	0204510*	0204530*	46	16	27	24	142	204
	315	18	IAXXA18L IBXXB18× δ L	0204511*	0204531*	48	16	32	27	202	276
	160	22	IAXXA22L IBXXB22× δ L	0204512*	0204532*	52	20	36	32	269	371
	160	28	IAXXA28L IBXXB28× δ L	0204513*	0204533*	54	21	41	41	333	509
	160	35	IAXXA35L IBXXB35× δ L	0204514*	0204534*	63	20	50	46	523	823
	160	42	IAXXA42L IBXXB42× δ L	0204515*	0204535*	66	21	60	55	775	1155
S	630	06	IAXXA06S IBXXB06× δ S	0204516*	0204536*	45	16	17	14	64	78
	630	08	IAXXA08S IBXXB08× δ S	0204517*	0204537*	47	18	19	17	81	103
	630	10	IAXXA10S IBXXB10× δ S	0204518*	0204538*	49	17	22	19	111	143
	630	12	IAXXA12S IBXXB12× δ S	0204519*	0204539*	51	19	24	22	135	179
	630	14	IAXXA14S IBXXB14× δ S	0204520*	0204540*	57	22	27	24	190	256
	400	16	IAXXA16S IBXXB16× δ S	0204521*	0204541*	57	21	30	27	231	313
	400	20	IAXXA20S IBXXB20× δ S	0204522*	0204542*	66	23	36	32	371	527
	400	25	IAXXA25S IBXXB25× δ S	0204523*	0204543*	74	26	46	41	681	931
	400	30	IAXXA30S IBXXB30× δ S	0204524*	0204544*	80	27	50	46	805	1181
	315	38	IAXXA38S IBXXB38× δ S	0204525*	0204545*	90	29	60	55	1267	1873
	315	50	IBXXB50× δ S		0204546*	117	33	80	70		3300

*材料：G—碳钢；B—不锈钢；T—黄铜。 *Material:G—Carbonsteel;B—Stainlesssteel;T—brass.

上海欧际冶金机械制造有限公司

地址：上海市宝山区富联路1188号


电话：021-66047188 66047818 传真：021-66047588

B45


LAXXA LBXXB

直角接头

Elbowunion

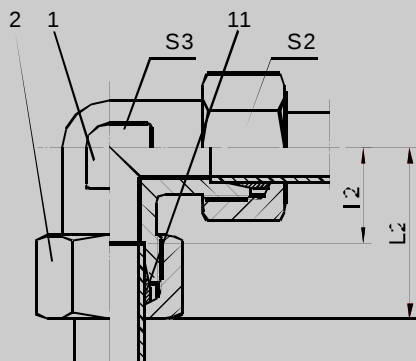

LAXXA

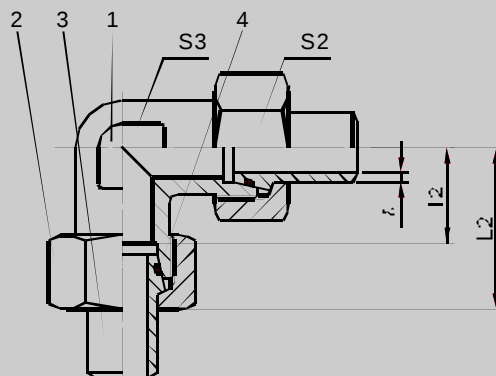

LBXXB

- Part1—本体Elbowbody
Part2—螺母Nut
Part3—焊接头Weldingcone
Part4—O形圈O-ring
Part11—卡套Ferrule

订货示例：型号为LAXXA04LL，材料为碳钢，仅供本体和螺母时，订货号为02046101G Part1+2。

Orderexample:Typeis LAXXA04LL,materialiscarbonsteel,onlyorderingelbowbodyandnut,thereferenceis02046101G Part1+2.



Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号					Weight 重量(g)	
				LAXXA	LBXXB	L2	I2	S2	S3	LAXXA LBXXB
LL	100	04	LAXXA04LL	0204601*		21	11.0	10	9	23
	100	06	LAXXA06LL	0204602*		21	9.5	12	11	28
	100	08	LAXXA08LL	0204603*		23	11.5	14	12	38
	100	10	LAXXA10LL	0204604*		24	12.5	17	14	56
	100	12	LAXXA12LL	0204605*		25	13.0	19	17	72
L	315	06	LAXXA06L LBXXB06 × ♂ L	0204606*	0204626*	27	12.0	14	12	52 65
	315	08	LAXXA08L LBXXB08 × ♂ L	0204607*	0204627*	29	14.0	17	14	77 99
	315	10	LAXXA10L LBXXB10 × ♂ L	0204608*	0204628*	30	15.0	19	17	100 132
	315	12	LAXXA12L LBXXB12 × ♂ L	0204609*	0204629*	32	17.0	22	19	136 180
	315	15	LAXXA15L LBXXB15 × ♂ L	0204610*	0204630*	36	21.0	27	19	167 229
	315	18	LAXXA18L LBXXB18 × ♂ L	0204611*	0204631*	40	23.5	32	24	249 323
	160	22	LAXXA22L LBXXB22 × ♂ L	0204612*	0204632*	44	27.5	36	27	330 432
	160	28	LAXXA28L LBXXB28 × ♂ L	0204613*	0204633*	47	30.5	41	36	454 630
	160	35	LAXXA35L LBXXB35 × ♂ L	0204614*	0204634*	56	34.5	50	41	710 1010
	160	42	LAXXA42L LBXXB42 × ♂ L	0204615*	0204635*	63	40.0	60	50	1088 1468
S	630	06	LAXXA06S LBXXB06 × ♂ S	0204616*	0204636*	31	16.0	17	14	90 104
	630	08	LAXXA08S LBXXB08 × ♂ S	0204617*	0204637*	32	17.0	19	17	118 140
	630	10	LAXXA10S LBXXB10 × ♂ S	0204618*	0204638*	34	17.5	22	19	164 196
	630	12	LAXXA12S LBXXB12 × ♂ S	0204619*	0204639*	38	21.5	24	22	212 256
	630	14	LAXXA14S LBXXB14 × ♂ S	0204620*	0204640*	40	22.0	27	19	210 276
	400	16	LAXXA16S LBXXB16 × ♂ S	0204621*	0204641*	43	24.5	30	24	280 362
	400	20	LAXXA20S LBXXB20 × ♂ S	0204622*	0204642*	48	26.5	36	27	422 576
	400	25	LAXXA25S LBXXB25 × ♂ S	0204623*	0204643*	54	30.0	46	36	788 1038
	400	30	LAXXA30S LBXXB30 × ♂ S	0204624*	0204644*	62	35.5	50	41	1021 1397
	315	38	LAXXA38S LBXXB38 × ♂ S	0204625*	0204645*	72	41.0	60	50	1590 2196
	315	50	LAXXA50S LBXXB50 × ♂ S	0204646*		98	80	80	70	6100

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material:G—Carbonsteel;B—Stainlesssteel;T—brass.

TAXXA TBXXB

三通接头

Teeunion

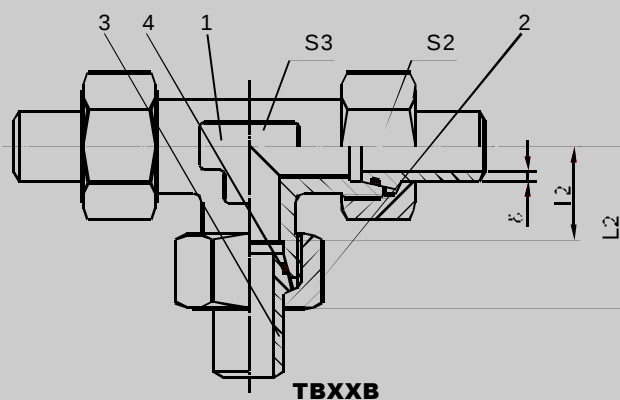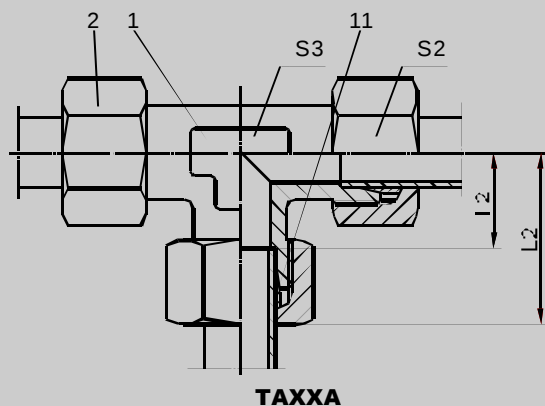

- Part1—本体Teebody
Part2—螺母Nut
Part3—焊接头Weldingcone
Part4—O形圈O-ring
Part11—卡套Ferrule

订货示例：型号为TAXXA04LL，材料为碳钢，仅供本体和螺母时，订货号为0204701G Part1+2。
Orderexample:Typeis TAXXA04LL,materialiscarbonsteel,onlyorderingteebodyandnut,thereferenceis 0204701G Part1+2.

Series 系列	PN	Tube OD 管子外径	Type 型号	Reference 订货号		L2	I2	S2	S3	Weight 重量(g)	
				TAXXA	TBXXB					TAXXA	TBXXB
LL	100	04	TAXXA04LL	0204701*		21	11.0	10	9	29	
	100	06	TAXXA06LL	0204702*		21	9.5	12	11	37	
	100	08	TAXXA08LL	0204703*		23	11.5	14	12	50	
	100	10	TAXXA10LL	0204704*		24	12.5	17	14	71	
	100	12	TAXXA12LL	0204705*		27	15.0	19	14	69	
L	315	06	TAXXA06L TBXXB06× $\frac{1}{2}$ L	0204706*	0204726*	27	12.0	14	12	72	92
	315	08	TAXXA08L TBXXB08× $\frac{1}{2}$ L	0204707*	0204727*	29	14.0	17	14	104	137
	315	10	TAXXA10L TBXXB10× $\frac{1}{2}$ L	0204708*	0204728*	30	15.0	19	14	105	153
	315	12	TAXXA12L TBXXB12× $\frac{1}{2}$ L	0204709*	0204729*	32	17.0	22	17	140	206
	315	15	TAXXA15L TBXXB15× $\frac{1}{2}$ L	0204710*	0204730*	36	21.0	27	19	237	330
	315	18	TAXXA18L TBXXB18× $\frac{1}{2}$ L	0204711*	0204731*	40	23.5	32	24	356	467
	160	22	TAXXA22L TBXXB22× $\frac{1}{2}$ L	0204712*	0204732*	44	27.5	36	27	462	615
	160	28	TAXXA28L TBXXB28× $\frac{1}{2}$ L	0204713*	0204733*	47	30.5	41	36	610	874
	160	35	TAXXA35L TBXXB35× $\frac{1}{2}$ L	0204714*	0204734*	56	34.5	50	41	953	1403
	160	42	TAXXA42L TBXXB42× $\frac{1}{2}$ L	0204715*	0204735*	63	40.0	60	50	1410	1980
S	630	06	TAXXA06S TBXXB06× $\frac{1}{2}$ S	0204716*	0204736*	31	16.0	17	14	124	144
	630	08	TAXXA08S TBXXB08× $\frac{1}{2}$ S	0204717*	0204737*	32	17.0	19	14	131	164
	630	10	TAXXA10S TBXXB10× $\frac{1}{2}$ S	0204718*	0204738*	34	17.5	22	17	185	233
	630	12	TAXXA12S TBXXB12× $\frac{1}{2}$ S	0204719*	0204739*	38	21.5	24	17	223	289
	630	14	TAXXA14S TBXXB14× $\frac{1}{2}$ S	0204720*	0204740*	40	22.0	27	19	296	395
	400	16	TAXXA16S TBXXB16× $\frac{1}{2}$ S	0204721*	0204741*	43	24.5	30	24	404	527
	400	20	TAXXA20S TBXXB20× $\frac{1}{2}$ S	0204722*	0204742*	48	26.5	36	27	600	834
	400	25	TAXXA25S TBXXB25× $\frac{1}{2}$ S	0204723*	0204743*	54	30.0	46	36	1112	1487
	400	30	TAXXA30S TBXXB30× $\frac{1}{2}$ S	0204724*	0204744*	62	35.5	50	41	1399	1963
	315	38	TAXXA38S TBXXB38× $\frac{1}{2}$ S	0204725*	0204745*	72	41.0	60	50	2168	3077
	315	50	TBXXB50× $\frac{1}{2}$ S		0204746*	134	116	80	70		8400

*材料：G—碳钢；B—不锈钢；T—黄铜。 *Material:G—Carbonsteel;B—Stainlesssteel;T—brass.

上海欧际冶金机械制造有限公司

地址：上海市宝山区富联路1188号


电话：021-66047188 66047818 传真：021-66047588

B47


XAXXA XBXXB

四通接头

Four-way union

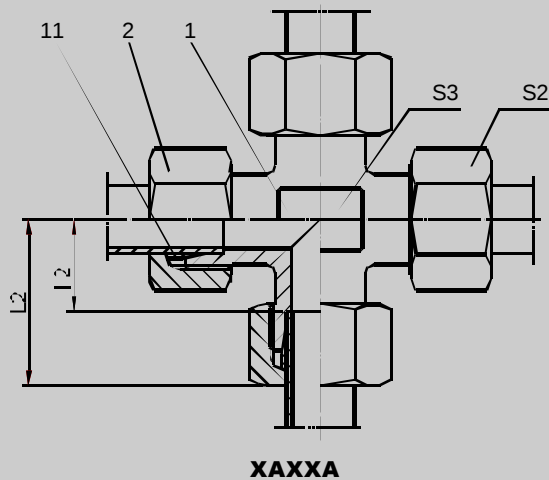

XAXXA

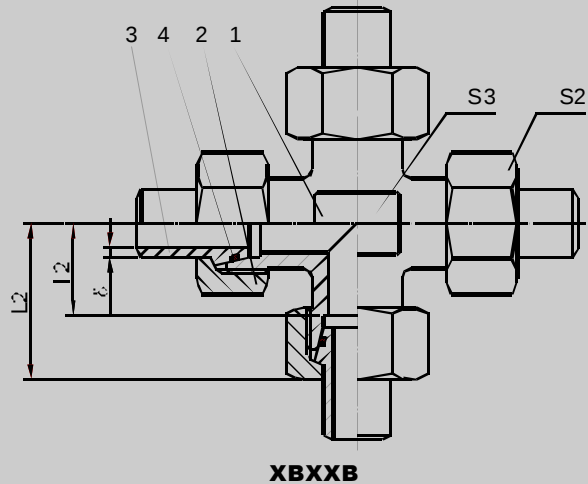

XBXXB


- Part1—本体Crossbody
- Part2—螺母Nut
- Part3—焊接头Welding cone
- Part4—O形圈O-ring
- Part11—卡套Ferrule

订货示例：型号为XAXXA04LL，材料为碳钢，仅供本体和螺母时，订货号为0204801G Part1+2。

Order example: Type is XAXXA04LL, material is carbon steel, only ordering crossbody and nut, the reference is 0204801G Part1+2.

Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号		L2	I2	S2	S3	Weight 重量(g)		
				XAXXA	XBXXB					XAXXA	XBXXB	
LL	100	04	XAXXA04LL		0204801*	21	11.0	10	9	32		
	100	06	XAXXA06LL		0204802*	21	9.5	12	9	40		
	100	08	XAXXA08LL		0204803*	23	11.5	14	12	54		
L	315	06	XAXXA06L	XBXXB06×♂L	0204804*	0204824*	27	12.0	14	12	81	88
	315	08	XAXXA08L	XBXXB08×♂L	0204805*	0204825*	29	14.0	17	12	108	119
	315	10	XAXXA10L	XBXXB10×♂L	0204806*	0204826*	30	15.0	19	14	134	150
	315	12	XAXXA12L	XBXXB12×♂L	0204807*	0204827*	32	17.0	22	17	184	206
	315	15	XAXXA15L	XBXXB15×♂L	0204808*	0204828*	36	21.0	27	19	304	335
	315	18	XAXXA18L	XBXXB18×♂L	0204809*	0204829*	40	23.5	32	24	460	497
	160	22	XAXXA22L	XBXXB22×♂L	0204810*	0204830*	44	27.5	36	27	586	637
	160	28	XAXXA28L	XBXXB28×♂L	0204811*	0204831*	47	30.5	41	36	835	923
	160	35	XAXXA35L	XBXXB35×♂L	0204812*	0204832*	56	34.5	50	41	1242	1392
	160	42	XAXXA42L	XBXXB42×♂L	0204813*	0204833*	63	40.0	60	50	1810	2000
S	630	06	XAXXA06S	XBXXB06×♂S	0204814*	0204834*	31	16.0	17	12	135	142
	630	08	XAXXA08S	XBXXB08×♂S	0204815*	0204835*	32	17.0	19	14	171	182
	630	10	XAXXA10S	XBXXB10×♂S	0204816*	0204836*	34	17.5	22	17	232	248
	630	12	XAXXA12S	XBXXB12×♂S	0204817*	0204837*	38	21.5	24	17	283	305
	630	14	XAXXA14S	XBXXB14×♂S	0204818*	0204838*	40	22.0	27	19	385	418
	400	16	XAXXA16S	XBXXB16×♂S	0204819*	0204839*	43	24.5	30	24	504	545
	400	20	XAXXA20S	XBXXB20×♂S	0204820*	0204840*	48	26.5	36	27	772	850
	315	25	XAXXA25S	XBXXB25×♂S	0204821*	0204841*	54	30.0	46	36	1437	1562
	315	30	XAXXA30S	XBXXB30×♂S	0204822*	0204842*	62	35.5	50	41	1794	1974
	315	38	XAXXA38S	XBXXB38×♂S	0204823*	0204843*	72	41.0	60	50	2794	3097

*材料：G—碳钢；B—不锈钢；T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.

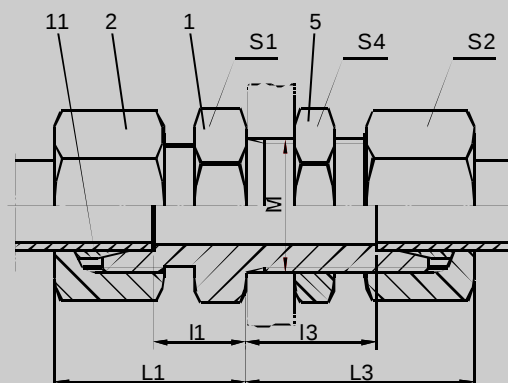


Part1—本体Threaded branch
Part2—螺母Nut
Part5—隔板螺母Tightening nut
Part11—卡套Ferrule

HAXXA

订货示例：型号为HAXXA06L，材料为碳钢，仅供本体和螺母时，订货号为0304901G Part1+2。
Order example: Type is HAXXA06L, material is carbon steel, only ordering threaded branch and nut, the reference is 0304901G Part1+2.

Series 系列	PN	Tube OD 管子外径	Type 型号	Reference 订货号 HAXXA	M	L1	I1	L3	I3	S1	S2	S4	Weight 重量(g) HAXXA
L	315	06	HAXXA06L	0304901*	M12×1.5	22	7.0	42	27.0	17	14	17	61
	315	08	HAXXA08L	0304902*	M14×1.5	23	8.0	42	27.0	19	17	19	84
	315	10	HAXXA10L	0304903*	M16×1.5	25	10.0	43	28.0	22	19	22	109
	315	12	HAXXA12L	0304904*	M18×1.5	25	10.0	44	29.0	24	22	24	136
	315	15	HAXXA15L	0304905*	M22×1.5	27	12.0	46	31.0	27	27	30	222
	315	18	HAXXA18L	0304906*	M26×1.5	30	13.5	49	32.5	32	32	36	334
	160	22	HAXXA22L	0304907*	M30×2	33	16.5	51	34.5	36	36	41	430
	160	28	HAXXA28L	0304908*	M36×2	35	18.5	52	35.5	41	41	46	566
	160	35	HAXXA35L	0304909*	M45×2	40	18.5	58	36.5	50	50	55	858
	160	42	HAXXA42L	0304910*	M52×2	42	19.0	59	36.0	60	60	65	1236
S	630	06	HAXXA06S	0304911*	M14×1.5	27	12.0	44	29.0	19	17	19	103
	630	08	HAXXA08S	0304912*	M16×1.5	28	13.0	44	29.0	22	19	22	132
	630	10	HAXXA10S	0304913*	M18×1.5	31	14.5	46	29.5	24	22	24	179
	630	12	HAXXA12S	0304914*	M20×1.5	31	14.5	47	30.5	27	24	27	216
	630	14	HAXXA14S	0304915*	M22×1.5	35	17.0	50	32.0	30	27	30	296
	400	16	HAXXA16S	0304916*	M24×1.5	35	16.5	50	31.5	32	30	32	343
	400	20	HAXXA20S	0304917*	M30×2	39	17.5	55	33.5	41	36	41	569
	400	25	HAXXA25S	0304918*	M36×2	44	20.0	59	35.0	46	46	46	922
	400	30	HAXXA30S	0304919*	M42×2	48	21.5	64	37.5	50	50	50	1106
	315	38	HAXXA38S	0304920*	M52×2	53	22.0	68	37.0	65	60	65	1805

*材料：G—碳钢；B—不锈钢；T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.

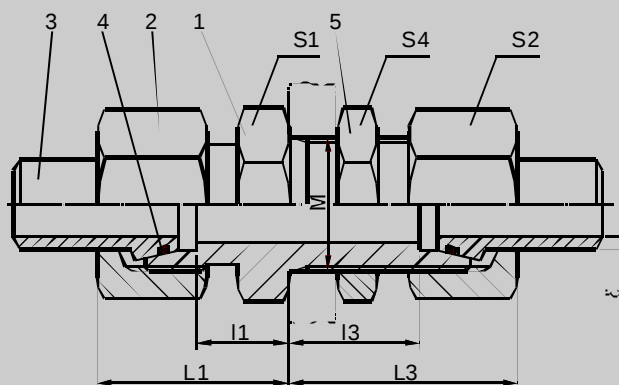

- Part1—本体Threaded branch
Part2—螺母Nut
Part3—焊接头Welding cone
Part4—O形圈O-ring
Part5—隔板螺母Tightening nut


HBXXB

订货示例：型号为HBXXB06× $\frac{1}{2}$ L，材料为碳钢，仅供本体和螺母时，订货号为0305001G Part1+2。

Order example: Type is HBXXB06× $\frac{1}{2}$ L, material is carbon steel, only ordering threaded branch and nut, the reference is 0305001G Part1+2.

Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号 HBXXB	M	L1	I1	L3	I3	S1	S2	S4	Weight 重量(g) HBXXB
L	315	06	HBXXB06× $\frac{1}{2}$ L	0305001*	M12×1.5	22	7.0	42	27.0	17	14	17	75
	315	08	HBXXB08× $\frac{1}{2}$ L	0305002*	M14×1.5	23	8.0	42	27.0	19	17	19	102
	315	10	HBXXB10× $\frac{1}{2}$ L	0305003*	M16×1.5	25	10.0	43	28.0	22	19	22	141
	315	12	HBXXB12× $\frac{1}{2}$ L	0305004*	M18×1.5	25	10.0	44	29.0	24	22	24	178
	315	15	HBXXB15× $\frac{1}{2}$ L	0305005*	M22×1.5	27	12.0	46	31.0	27	27	30	282
	315	18	HBXXB18× $\frac{1}{2}$ L	0305006*	M26×1.5	30	13.5	49	32.5	32	32	36	404
	160	22	HBXXB22× $\frac{1}{2}$ L	0305007*	M30×2	33	16.5	51	34.5	36	36	41	526
	160	28	HBXXB28× $\frac{1}{2}$ L	0305008*	M36×2	35	18.5	52	35.5	41	41	46	716
	160	35	HBXXB35× $\frac{1}{2}$ L	0305009*	M45×2	40	18.5	58	36.5	50	50	55	1118
	160	42	HBXXB42× $\frac{1}{2}$ L	0305010*	M52×2	42	19.0	59	36.0	60	60	65	1586
S	630	06	HBXXB06× $\frac{1}{2}$ S	0305011*	M14×1.5	27	12.0	44	29.0	19	17	19	117
	630	08	HBXXB08× $\frac{1}{2}$ S	0305012*	M16×1.5	28	13.0	44	29.0	22	19	22	150
	630	10	HBXXB10× $\frac{1}{2}$ S	0305013*	M18×1.5	31	14.5	46	29.5	24	22	24	211
	630	12	HBXXB12× $\frac{1}{2}$ S	0305014*	M20×1.5	31	14.5	47	30.5	27	24	27	258
	630	14	HBXXB14× $\frac{1}{2}$ S	0305015*	M22×1.5	35	17.0	50	32.0	30	27	30	344
	400	16	HBXXB16× $\frac{1}{2}$ S	0305016*	M24×1.5	35	16.5	50	31.5	32	30	32	425
	400	20	HBXXB20× $\frac{1}{2}$ S	0305017*	M30×2	39	17.5	55	33.5	41	36	41	712
	400	25	HBXXB25× $\frac{1}{2}$ S	0305018*	M36×2	44	20.0	59	35.0	46	46	46	1182
	400	30	HBXXB30× $\frac{1}{2}$ S	0305019*	M42×2	48	21.5	64	37.5	50	50	50	1468
	315	38	HBXXB38× $\frac{1}{2}$ S	0305020*	M52×2	53	22.0	68	37.0	65	60	65	2405
	315	50	HBXXB50× $\frac{1}{2}$ S	0305021*	M68×2	65	29	79	43	75	80	80	4400

*材料：G—碳钢；B—不锈钢。 *Material: G—Carbon steel; B—Stainless steel.

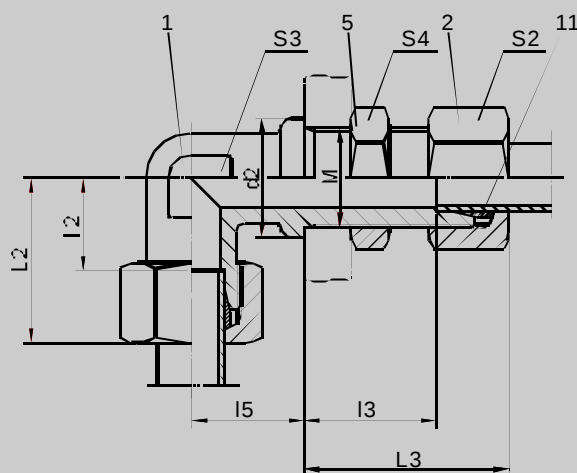

Part1—本体Elbow
Part2—螺母Nut
Part5—隔板螺母Tighteningnut
Part11—卡套Ferrule

MAXXA

订货示例：型号为MAXXA06L，材料为碳钢， 仅供本体和螺母时， 订货号为0305101G Part1+2。
Orderexample:Typeis MAXXA06L,materialiscarbonsteel,onlyorderingelbowandnut,thereferenceis 0305101G Part1+2.

Series 系列	PN	Tube OD 管子外径	Type 型号	Reference 订货号 MAXXA	M	L2	I2	L3	I3	I5	S2	S3	S4	d2	Weight 重量(g) MAXXA
L	315	06	MAXXA06L	0305101*	M12×1.5	27	12.0	42	27.0	14	14	12	17	17	72
	315	08	MAXXA08L	0305102*	M14×1.5	29	14.0	42	27.0	17	17	12	19	19	95
	315	10	MAXXA10L	0305103*	M16×1.5	30	15.0	43	28.0	18	19	14	22	22	120
	315	12	MAXXA12L	0305104*	M18×1.5	32	17.0	44	29.0	20	22	17	24	24	153
	315	15	MAXXA15L	0305105*	M22×1.5	36	21.0	46	31.0	23	27	19	30	27	256
	315	18	MAXXA18L	0305106*	M26×1.5	40	23.5	49	32.5	24	32	24	36	32	374
	160	22	MAXXA22L	0305107*	M30×2	44	27.5	51	34.5	30	36	27	41	36	490
	160	28	MAXXA28L	0305108*	M36×2	47	30.5	52	35.5	34	41	36	46	42	679
	160	35	MAXXA35L	0305109*	M45×2	56	34.5	58	36.5	39	50	41	55	50	1041
S	160	42	MAXXA42L	0305110*	M52×2	63	40.0	59	36.0	43	60	50	65	60	1511
	630	06	MAXXA06S	0305111*	M14×1.5	31	16.0	44	29.0	17	17	12	19	19	110
	630	08	MAXXA08S	0305112*	M16×1.5	32	17.0	44	29.0	18	19	14	22	22	143
	630	10	MAXXA10S	0305113*	M18×1.5	34	17.5	46	29.5	20	22	17	24	24	196
	630	12	MAXXA12S	0305114*	M20×1.5	38	21.5	47	30.5	21	24	17	27	27	233
	630	14	MAXXA14S	0305115*	M22×1.5	40	22.0	50	32.0	23	27	19	30	27	309
	400	16	MAXXA16S	0305116*	M24×1.5	43	24.5	50	31.5	24	30	24	32	30	391
	400	20	MAXXA20S	0305117*	M30×2	48	26.5	55	33.5	30	36	27	41	36	612
	400	25	MAXXA25S	0305118*	M36×2	54	30.0	59	35.0	34	46	36	46	42	1048
	400	30	MAXXA30S	0305119*	M42×2	62	35.5	64	37.5	39	50	41	50	50	1364
	315	38	MAXXA38S	0305120*	M52×2	72	41.0	68	37.0	43	60	50	65	60	2059

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material:G—Carbonsteel;B—Stainlesssteel;T—brass.

Part1—本体Elbow
Part2—螺母Nut
Part3—焊接头Weldingcone
Part4—O形圈O-ring
Part5—隔板螺母Tighteningnut


Order example: Type is MBXXB06 x 5 L, material is carbon steel, only ordering the bow and nut, the reference is 0305201G Part 1+2.

*材料: G—碳钢; B—不锈钢。 *Material: G—Carbonsteel; B—Stainlesssteel.

BAXXA

直通变径接头

Straightreducingadapter

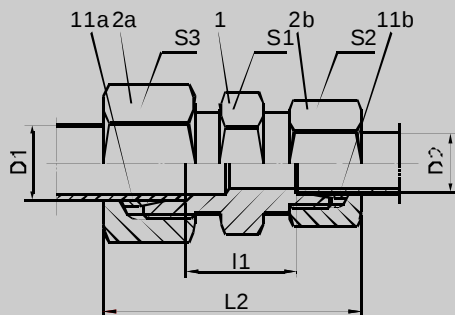

Part1—本体Threadedbranch

Part2a, 2b—螺母Nut

Part11a, 11b—卡套Ferrule

BAXXA

订货示例：型号为BAXXA06/04LL，材料为碳钢，仅供本体时，订货号为0405301G Part1。

Orderexample:Typeis BAXXA06/04LL,materialiscarbonsteel,onlyorderingthreadedbranch,thereferenceis0405301G Part1.

Series 系列	PN	Tube O D 管子外径		Type 型号	Reference 订货号						Weight 重量(g)
		D1	D2		BAXXA	L2	I1	S1	S2	S3	BAXXA
LL	100	06	04	BAXXA06/04LL	0405301*	32	10.5	11	10	12	18
	100	08	04	BAXXA08/04LL	0405302*	34	12.5	12	10	14	22
	100	08	06	BAXXA08/06LL	0405303*	34	11.0	12	12	14	23
	315	08	06	BAXXA08/06L	0405304*	40	11.0	14	14	17	44
	315	10	06	BAXXA10/06L	0405305*	41	12.0	17	14	19	54
L	315	10	08	BAXXA10/08L	0405306*	41	12.0	17	17	19	59
	315	12	06	BAXXA12/06L	0405307*	42	13.0	19	14	22	66
	315	12	08	BAXXA12/08L	0405308*	42	13.0	19	17	22	72
	315	12	10	BAXXA12/10L	0405309*	43	14.0	19	19	22	77
	315	15	10	BAXXA15/10L	0405310*	45	15.0	24	19	27	111
	315	15	12	BAXXA15/12L	0405311*	45	15.0	24	22	27	118
	315	18	10	BAXXA18/10L	0405312*	46	15.5	27	19	32	154
	315	18	12	BAXXA18/12L	0405313*	46	15.5	27	22	32	161
	315	18	15	BAXXA18/15L	0405314*	48	16.5	27	27	32	179
	160	22	12	BAXXA22/12L	0405315*	48	17.5	32	22	36	198
	160	22	15	BAXXA22/15L	0405316*	50	18.5	32	27	36	224
	160	22	18	BAXXA22/18L	0405317*	50	18.0	32	32	36	246
	160	28	18	BAXXA28/18L	0405318*	52	19.0	41	32	41	308
	160	28	22	BAXXA28/22L	0405319*	54	21.0	41	36	41	336
	160	35	22	BAXXA35/22L	0405320*	59	21.0	46	36	50	448
	160	35	28	BAXXA35/28L	0405321*	59	21.0	46	41	50	461
	160	42	35	BAXXA42/35L	0405322*	66	21.5	55	50	60	725
S	630	08	06	BAXXA08/06S	0405323*	47	18.0	17	17	19	76
	630	10	06	BAXXA10/06S	0405324*	48	17.5	19	17	22	94
	630	10	08	BAXXA10/08S	0405325*	48	17.5	19	19	22	98
	630	12	06	BAXXA12/06S	0405326*	50	19.5	22	17	24	114
	630	12	08	BAXXA12/08S	0405327*	50	19.5	22	19	24	117
	630	12	10	BAXXA12/10S	0405328*	51	19.0	22	22	24	130
	630	14	10	BAXXA14/10S	0405329*	54	20.5	24	22	27	161
	630	14	12	BAXXA14/12S	0405330*	54	20.5	24	24	27	166
	400	16	10	BAXXA16/10S	0405331*	54	20.0	27	22	30	184
	400	16	12	BAXXA16/12S	0405332*	54	20.0	27	24	30	190
	400	16	14	BAXXA16/14S	0405333*	57	21.5	27	27	30	207
	400	20	10	BAXXA20/10S	0405334*	60	22.0	32	22	36	277
	400	20	12	BAXXA20/12S	0405335*	60	22.0	32	24	36	282
	400	20	16	BAXXA20/16S	0405336*	63	23.0	32	30	36	318
	400	25	16	BAXXA25/16S	0405337*	68	25.5	41	30	46	524
	400	25	20	BAXXA25/20S	0405338*	71	25.5	41	36	46	588
	400	30	20	BAXXA30/20S	0405339*	74	26.0	46	36	50	650
	400	30	25	BAXXA30/25S	0405340*	77	26.5	46	46	50	770
	315	38	30	BAXXA38/30S	0405341*	87	29.5	55	50	60	1163

*材料：G—碳钢；B—不锈钢；T—黄铜。 *Material:G—Carbonsteel;B—Stainlesssteel;T—brass.

上海欧际冶金机械制造有限公司

地址：上海市宝山区富联路1188号


电话：021-66047188 66047818 传真：021-66047588

B53

BBXXB

直通变径接头

Straightreducingadapter

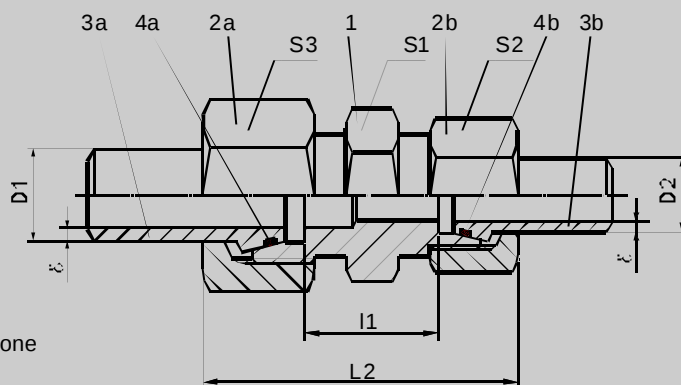

BBXXB

Part1—本体Threadedbranch

Part2a. 2b—螺母Nut

Part3a. 3b—焊接头Weldingcone

Part4a. 4b—O形圈O-ring


订货示例: 型号为BBXXB08/06× δ L, 材料为碳钢, 仅供本体时, 订货号为0405401G Part1.

Orderexample: Typeis BBXXB08/06× δ L, materialiscarbonsteel, onlyorderingthreadedbranch, thereferenceis 0405401G Part1.

Series 系列	Tube O D 管子外径		Type 型号	Reference 订货号		L2	I1	S1	S2	S3	Weight 重量(g)
	PN	D1 D2		BBXXB							BBXXB
L	315	08 06	BBXXB08/06× δ L	0405401*		40	11.0	14	14	17	60
	315	10 06	BBXXB10/06× δ L	0405402*		41	12.0	17	14	19	77
	315	10 08	BBXXB10/08× δ L	0405403*		41	12.0	17	17	19	84
	315	12 06	BBXXB12/06× δ L	0405404*		42	13.0	19	14	22	94
	315	12 08	BBXXB12/08× δ L	0405405*		42	13.0	19	17	22	102
	315	12 10	BBXXB12/10× δ L	0405406*		43	14.0	19	19	22	114
	315	15 10	BBXXB15/10× δ L	0405407*		45	15.0	24	19	27	157
	315	15 12	BBXXB15/12× δ L	0405408*		45	15.0	24	22	27	169
	315	18 10	BBXXB18/10× δ L	0405409*		46	15.5	27	19	32	205
	315	18 12	BBXXB18/12× δ L	0405410*		46	15.5	27	22	32	217
	315	18 15	BBXXB18/15× δ L	0405411*		48	16.5	27	27	32	244
	160	22 12	BBXXB22/12× δ L	0405412*		48	17.5	32	22	36	267
	160	22 15	BBXXB22/15× δ L	0405413*		50	18.5	32	27	36	302
	160	22 18	BBXXB22/18× δ L	0405414*		50	18.0	32	32	36	329
	160	28 18	BBXXB28/18× δ L	0405415*		52	19.0	41	32	41	418
	160	28 22	BBXXB28/22× δ L	0405416*		54	21.0	41	36	41	459
	160	35 22	BBXXB35/22× δ L	0405417*		59	21.0	46	36	50	626
	160	35 28	BBXXB35/28× δ L	0405418*		59	21.0	46	41	50	666
	160	42 35	BBXXB42/35× δ L	0405419*		66	21.5	55	50	60	1030
S	630	08 06	BBXXB08/06× δ S	0405420*		47	18.0	17	17	19	92
	630	10 06	BBXXB10/06× δ S	0405421*		48	17.5	19	17	22	117
	630	10 08	BBXXB10/08× δ S	0405422*		48	17.5	19	19	22	123
	630	12 06	BBXXB12/06× δ S	0405423*		50	19.5	22	17	24	142
	630	12 08	BBXXB12/08× δ S	0405424*		50	19.5	22	19	24	147
	630	12 10	BBXXB12/10× δ S	0405425*		51	19.0	22	22	24	167
	630	14 10	BBXXB14/10× δ S	0405426*		54	20.5	24	22	27	201
	630	14 12	BBXXB14/12× δ S	0405427*		54	20.5	24	24	27	211
	400	16 10	BBXXB16/10× δ S	0405428*		54	20.0	27	22	30	241
	400	16 12	BBXXB16/12× δ S	0405429*		54	20.0	27	24	30	252
	400	16 14	BBXXB16/14× δ S	0405430*		57	21.5	27	27	30	272
	400	20 10	BBXXB20/10× δ S	0405431*		60	22.0	32	22	36	364
	400	20 12	BBXXB20/12× δ S	0405432*		60	22.0	32	24	36	374
	400	20 16	BBXXB20/16× δ S	0405433*		63	23.0	32	30	36	430
	400	25 16	BBXXB25/16× δ S	0405434*		68	25.5	41	30	46	695
	400	25 20	BBXXB25/20× δ S	0405435*		71	25.5	41	36	46	789
	400	30 20	BBXXB30/20× δ S	0405436*		74	26.0	46	36	50	902
	400	30 25	BBXXB30/25× δ S	0405437*		77	26.5	46	46	50	1081
	315	38 30	BBXXB38/30× δ S	0405438*		87	29.5	55	50	60	1644

*材料: G—碳钢; B—不锈钢。

*Material: G—Carbonsteel; B—Stainlesssteel.

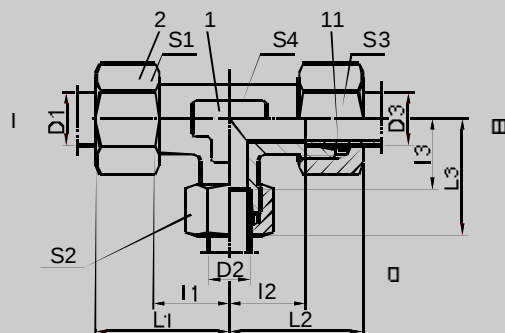

Part1—本体Teebody

Part2—螺母Nut

Part11—卡套Ferrule


EAXXA

订货示例：型号为EAXXA04/08/04LL，材料为碳钢，仅供本体和螺母时，订货号为0405501G Part1+2。

Orderexample:Typeis EAXXA04/08/04LL,materialiscarbonsteel,onlyorderingteebodyandnut,thereferenceis 0405501G Part1+2.

Series 系列	Tube O D 管子外径				Type 型号(ⅠⅡⅢ)	Reference 订货号													Weight 重量(g)
	PN	D1	D2	D3		EAXXA	L1	L2	L3	I1	I2	I3	S1	S2	S3	S4	EAXXA		
LL	100	04	08	04	EAXXA04/08/04LL	0405501*	23	23	23	13.0	13.0	11.5	10	14	10	12	43		
	100	06	04	06	EAXXA06/04/06LL	0405502*	21	21	21	9.5	9.5	11.0	12	10	12	11	36		
L	315	06	08	06	EAXXA06/08/06L	0405503*	29	29	29	14.0	14.0	14.0	14	17	14	14	93		
	315	08	06	08	EAXXA08/06/08L	0405504*	29	29	29	14.0	14.0	14.0	17	14	17	14	98		
	315	06	10	06	EAXXA06/10/06L	0405505*	30	30	30	15.0	15.0	15.0	14	19	14	14	85		
	315	08	10	08	EAXXA08/10/08L	0405506*	30	30	30	15.0	15.0	15.0	17	19	17	14	97		
	315	10	06	10	EAXXA10/06/10L	0405507*	30	30	30	15.0	15.0	15.0	19	14	19	14	95		
	315	10	08	10	EAXXA10/08/10L	0405508*	30	30	30	15.0	15.0	15.0	19	17	19	14	102		
	315	10	10	06	EAXXA10/10/06L	0405509*	30	30	30	15.0	15.0	15.0	19	19	14	14	95		
	315	08	12	08	EAXXA08/12/08L	0405510*	32	32	32	17.0	17.0	17.0	17	22	17	17	121		
	315	12	06	12	EAXXA12/06/12L	0405511*	32	32	32	17.0	17.0	17.0	22	14	22	17	128		
	315	12	08	08	EAXXA12/08/08L	0405512*	32	32	32	17.0	17.0	17.0	22	17	17	17	120		
	315	12	08	12	EAXXA12/08/12L	0405513*	32	32	32	17.0	17.0	17.0	22	17	22	17	129		
	315	12	10	10	EAXXA12/10/10L	0405514*	32	32	32	17.0	17.0	17.0	22	19	19	17	126		
	315	12	10	12	EAXXA12/10/12L	0405515*	32	32	32	17.0	17.0	17.0	22	19	22	17	133		
	315	12	12	10	EAXXA12/12/10L	0405516*	32	32	32	17.0	17.0	17.0	22	22	19	17	135		
	315	10	15	10	EAXXA10/15/10L	0405517*	36	36	36	21.0	21.0	21.0	19	27	19	19	192		
	315	12	15	12	EAXXA12/15/12L	0405518*	36	36	36	21.0	21.0	21.0	22	27	22	19	198		
	315	15	06	15	EAXXA15/06/15L	0405519*	36	36	36	21.0	21.0	21.0	27	14	27	19	205		
	315	15	10	15	EAXXA15/10/15L	0405520*	36	36	36	21.0	21.0	21.0	27	19	27	19	213		
	315	15	12	12	EAXXA15/12/12L	0405521*	36	36	36	21.0	21.0	21.0	27	22	22	19	201		
	315	15	12	15	EAXXA15/12/15L	0405522*	36	36	36	21.0	21.0	21.0	27	22	27	19	217		
	315	15	15	12	EAXXA15/15/12L	0405523*	36	36	36	21.0	21.0	21.0	27	27	22	19	214		
	315	12	18	12	EAXXA12/18/12L	0405524*	39	39	40	24.0	24.0	23.5	22	32	22	24	287		
	315	18	10	10	EAXXA18/10/10L	0405525*	40	39	39	23.5	24.0	24.0	32	19	19	24	257		
	315	18	10	18	EAXXA18/10/18L	0405526*	40	40	39	23.5	23.5	24.0	32	19	32	24	306		
	315	18	12	18	EAXXA18/12/18L	0405527*	40	40	39	23.5	23.5	24.0	32	22	32	24	317		
	315	18	15	18	EAXXA18/15/18L	0405528*	40	40	39	23.5	23.5	24.0	32	27	32	24	337		
	315	18	18	10	EAXXA18/18/10L	0405529*	40	39	40	23.5	24.0	23.5	32	32	19	24	305		
	160	22	10	22	EAXXA22/10/22L	0405530*	44	44	43	27.5	27.5	28.0	36	19	36	27	398		
	160	22	12	22	EAXXA22/12/22L	0405531*	44	44	43	27.5	27.5	28.0	36	22	36	27	405		
	160	22	15	15	EAXXA22/15/15L	0405532*	44	43	43	27.5	28.0	28.0	36	27	27	27	399		
	160	22	15	22	EAXXA22/15/22L	0405533*	44	44	43	27.5	27.5	28.0	36	27	36	27	433		
	160	22	18	18	EAXXA22/18/18L	0405534*	44	44	44	27.5	27.5	27.5	36	32	32	27	442		
160	22	18	22	EAXXA22/18/22L	0405535*	44	44	44	27.5	27.5	27.5	36	32	36	27	458			
160	22	22	18	EAXXA22/22/18L	0405536*	44	44	44	27.5	27.5	27.5	36	36	32	27	440			
160	28	10	28	EAXXA28/10/28L	0405537*	47	47	46	30.5	30.5	31.0	41	19	41	36	555			
160	28	12	28	EAXXA28/12/28L	0405538*	47	47	46	30.5	30.5	31.0	41	22	41	36	560			
160	28	15	28	EAXXA28/15/28L	0405539*	47	47	46	30.5	30.5	31.0	41	27	41	36	595			
160	28	18	28	EAXXA28/18/28L	0405540*	47	47	47	30.5	30.5	30.5	41	32	41	36	597			
160	28	22	22	EAXXA28/22/22L	0405541*	47	47	47	30.5	30.5	30.5	41	36	36	36	606			
160	28	22	28	EAXXA28/22/28L	0405542*	47	47	47	30.5	30.5	30.5	41	36	41	36	602			

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbonsteel; B—Stainlesssteel; T—brass.




Order example: Type is EAXXA10/06/10S, material is carbon steel, only ordering tee body and nut, the reference is 0405601G Part 1+2.

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbonsteel; B—Stainlesssteel; T—brass.

EBXXB

三通变径接头

Reducing tee adapter

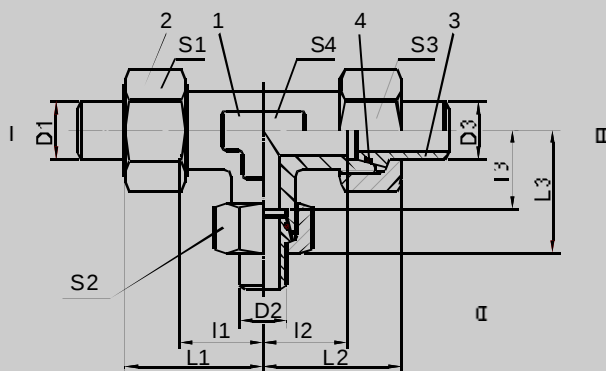

- Part1—本体 Teebody
Part2—螺母 Nut
Part3—焊接头 Welding cone
Part4—O形圈 O-ring

EBXXB

订货示例：型号为EBXXB06/08/06× $\frac{1}{2}$ L，材料为碳钢，仅供本体和螺母时，订货号为0405701G Part1+2。

Order example: Type is EBXXB06/08/06× $\frac{1}{2}$ L, material is carbon steel, only ordering tee body and nut, the reference is 0405701G Part1+2.

Series 系列	Tube O D 管子外径				Type 型号 (I II III)	Reference 订货号												Weight 重量(g)	
	PN	D1	D2	D3		EBXXB	L1	L2	L3	I1	I2	I3	S1	S2	S3	S4	EBXXB		
L	315 06	08	06	06	EBXXB06/08/06× $\frac{1}{2}$ L	0405701*	29	29	29	14.0	14.0	14.0	14	17	14	14	116		
	315 08	06	08	08	EBXXB08/06/08× $\frac{1}{2}$ L	0405702*	29	29	29	14.0	14.0	14.0	17	14	17	14	123		
	315 06	10	06	06	EBXXB06/10/06× $\frac{1}{2}$ L	0405703*	30	30	30	15.0	15.0	15.0	14	19	14	14	115		
	315 08	10	08	08	EBXXB08/10/08× $\frac{1}{2}$ L	0405704*	30	30	30	15.0	15.0	15.0	17	19	17	14	131		
	315 10	06	10	10	EBXXB10/06/10× $\frac{1}{2}$ L	0405705*	30	30	30	15.0	15.0	15.0	19	14	19	14	134		
	315 10	08	10	10	EBXXB10/08/10× $\frac{1}{2}$ L	0405706*	30	30	30	15.0	15.0	15.0	19	17	19	14	143		
	315 10	10	10	06	EBXXB10/10/06× $\frac{1}{2}$ L	0405707*	30	30	30	15.0	15.0	15.0	19	19	14	14	134		
	315 08	12	08	08	EBXXB08/12/08× $\frac{1}{2}$ L	0405708*	32	32	32	17.0	17.0	17.0	17	22	17	17	160		
	315 12	06	12	12	EBXXB12/06/12× $\frac{1}{2}$ L	0405709*	32	32	32	17.0	17.0	17.0	22	14	22	17	177		
	315 12	08	08	08	EBXXB12/08/08× $\frac{1}{2}$ L	0405710*	32	32	32	17.0	17.0	17.0	22	17	17	17	160		
	315 12	08	12	12	EBXXB12/08/12× $\frac{1}{2}$ L	0405711*	32	32	32	17.0	17.0	17.0	22	17	22	17	180		
	315 12	10	10	10	EBXXB12/10/10× $\frac{1}{2}$ L	0405712*	32	32	32	17.0	17.0	17.0	22	19	19	17	179		
	315 12	10	12	12	EBXXB12/10/12× $\frac{1}{2}$ L	0405713*	32	32	32	17.0	17.0	17.0	22	19	22	17	186		
	315 12	12	12	10	EBXXB12/12/10× $\frac{1}{2}$ L	0405714*	32	32	32	17.0	17.0	17.0	22	22	19	17	193		
	315 10	15	10	10	EBXXB10/15/10× $\frac{1}{2}$ L	0405715*	36	36	36	21.0	21.0	21.0	19	27	19	19	254		
	315 12	15	12	12	EBXXB12/15/12× $\frac{1}{2}$ L	0405716*	36	36	36	21.0	21.0	21.0	22	27	22	19	270		
	315 15	06	15	15	EBXXB15/06/15× $\frac{1}{2}$ L	0405717*	36	36	36	21.0	21.0	21.0	27	14	27	19	272		
	315 15	10	15	15	EBXXB15/10/15× $\frac{1}{2}$ L	0405718*	36	36	36	21.0	21.0	21.0	27	19	27	19	289		
	315 15	12	12	12	EBXXB15/12/12× $\frac{1}{2}$ L	0405719*	36	36	36	21.0	21.0	21.0	27	22	22	19	273		
	315 15	12	15	15	EBXXB15/12/15× $\frac{1}{2}$ L	0405720*	36	36	36	21.0	21.0	21.0	27	22	27	19	298		
	315 15	15	12	12	EBXXB15/15/12× $\frac{1}{2}$ L	0405721*	36	36	36	21.0	21.0	21.0	27	27	22	19	295		
	315 12	18	12	12	EBXXB12/18/12× $\frac{1}{2}$ L	0405722*	39	39	40	24.0	24.0	23.5	22	32	22	24	364		
	315 18	10	10	10	EBXXB18/10/10× $\frac{1}{2}$ L	0405723*	40	39	39	23.5	24.0	24.0	32	19	19	24	324		
	315 18	10	18	18	EBXXB18/10/18× $\frac{1}{2}$ L	0405724*	40	40	39	23.5	23.5	24.0	32	19	32	24	392		
	315 18	12	18	18	EBXXB18/12/18× $\frac{1}{2}$ L	0405725*	40	40	39	23.5	23.5	24.0	32	22	32	24	408		
	315 18	15	18	18	EBXXB18/15/18× $\frac{1}{2}$ L	0405726*	40	40	39	23.5	23.5	24.0	32	27	32	24	437		
	315 18	18	10	10	EBXXB18/18/10× $\frac{1}{2}$ L	0405727*	40	39	40	23.5	24.0	23.5	32	32	19	24	391		
	160 22	10	22	22	EBXXB22/10/22× $\frac{1}{2}$ L	0405728*	44	44	43	27.5	27.5	28.0	36	19	36	27	510		
	160 22	12	22	22	EBXXB22/12/22× $\frac{1}{2}$ L	0405729*	44	44	43	27.5	27.5	28.0	36	22	36	27	522		
	160 22	15	15	15	EBXXB22/15/15× $\frac{1}{2}$ L	0405730*	44	43	43	27.5	28.0	28.0	36	27	27	27	507		
	160 22	15	22	22	EBXXB22/15/22× $\frac{1}{2}$ L	0405731*	44	44	43	27.5	27.5	28.0	36	27	36	27	559		
	160 22	18	18	18	EBXXB22/18/18× $\frac{1}{2}$ L	0405732*	44	44	44	27.5	27.5	27.5	36	32	32	27	560		
	160 22	18	22	22	EBXXB22/18/22× $\frac{1}{2}$ L	0405733*	44	44	44	27.5	27.5	27.5	36	32	36	27	589		
	160 22	22	18	18	EBXXB22/22/18× $\frac{1}{2}$ L	0405734*	44	44	44	27.5	27.5	27.5	36	36	32	27	571		
	160 28	10	28	28	EBXXB28/10/28× $\frac{1}{2}$ L	0405735*	47	47	46	30.5	30.5	31.0	41	19	41	36	721		
	160 28	12	28	28	EBXXB28/12/28× $\frac{1}{2}$ L	0405736*	47	47	46	30.5	30.5	31.0	41	22	41	36	731		
	160 28	15	28	28	EBXXB28/15/28× $\frac{1}{2}$ L	0405737*	47	47	46	30.5	30.5	31.0	41	27	41	36	775		
	160 28	18	28	28	EBXXB28/18/28× $\frac{1}{2}$ L	0405738*	47	47	47	30.5	30.5	30.5	41	32	41	36	782		
	160 28	22	22	22	EBXXB28/22/22× $\frac{1}{2}$ L	0405739*	47	47	47	30.5	30.5	30.5	41	36	36	36	777		
	160 28	22	28	28	EBXXB28/22/28× $\frac{1}{2}$ L	0405740*	47	47	47	30.5	30.5	30.5	41	36	41	36	800		

*材料: G—碳钢; B—不锈钢。 *Material: G—Carbon steel; B—Stainless steel.

上海欧际冶金机械制造有限公司

地址: 上海市宝山区富联路1188号


电话: 021-66047188 66047818 传真: 021-66047588

B57

EBXXB

三通变径接头

Reducing tee adapter

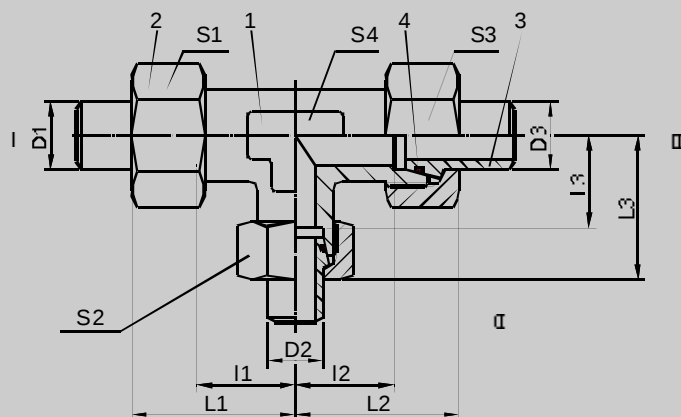

Part1—本体 Teebody
Part2—螺母 Nut
Part3—焊接头 Welding cone
Part4—O形圈 O-ring

EBXXB

订货示例：型号为EBXXB10/06/10× $\frac{1}{4}$ S，材料为碳钢，仅供本体和螺母时，订货号为0405801G Part1+2。
Order example: Type is EBXXB10/06/10× $\frac{1}{4}$ S, material is carbon steel, only ordering tee body and nut, the reference is 0405801G Part1+2.

Series 系列	Tube O D 管子外径				Type 型号 (I II III IV)	Reference 订货号													Weight 重量(g)
	PN	D1	D2	D3		EBXXB	L1	L2	L3	I1	I2	I3	S1	S2	S3	S4	EBXXB		
S	630	10	06	10	EBXXB10/06/10× 1/4 S	0405801*	34	34	33	17.5	17.5	18.0	22	17	22	17	202		
	630	12	08	08	EBXXB12/08/08× 1/4 S	0405802*	38	37	37	21.5	22.0	22.0	24	19	19	17	228		
	630	12	08	12	EBXXB12/08/12× 1/4 S	0405803*	38	38	37	21.5	21.5	22.0	24	19	24	17	253		
	630	12	10	12	EBXXB12/10/12× 1/4 S	0405804*	38	38	38	21.5	21.5	21.5	24	22	24	17	271		
	400	12	16	12	EBXXB12/16/12× 1/4 S	0405805*	42	42	43	25.5	25.5	24.5	24	30	24	24	416		
	400	16	06	16	EBXXB16/06/16× 1/4 S	0405806*	43	43	41	24.5	24.5	26.0	30	17	30	24	427		
	400	16	08	16	EBXXB16/08/16× 1/4 S	0405807*	43	43	41	24.5	24.5	26.0	30	19	30	24	440		
	400	16	10	16	EBXXB16/16/10/× 1/4 S	0405808*	43	43	42	24.5	24.5	25.5	30	22	30	24	460		
	400	16	12	16	EBXXB16/16/12/× 1/4 S	0405809*	43	43	42	24.5	24.5	25.5	30	24	30	24	464		
	400	16	20	16	EBXXB16/2160/× 1/4 S	0405810*	47	47	48	28.5	28.5	26.5	30	36	30	27	666		
	400	20	10	20	EBXXB20/10/20× 1/4 S	0405811*	48	48	46	26.5	26.5	29.5	36	22	36	27	685		
	400	20	12	20	EBXXB20/12/20× 1/4 S	0405812*	48	48	46	26.5	26.5	29.5	36	24	36	27	697		
	400	20	16	20	EBXXB20/16/20× 1/4 S	0405813*	48	48	47	26.5	26.5	28.5	36	30	36	27	735		
	400	20	25	20	EBXXB20/25/20× 1/4 S	0405814*	53	53	54	31.5	31.5	30.0	36	46	36	36	1167		
	400	25	16	25	EBXXB25/16/25× 1/4 S	0405815*	54	54	52	30.0	30.0	33.5	46	30	46	36	1261		
	400	25	20	25	EBXXB25/20/25× 1/4 S	0405816*	54	54	53	30.0	30.0	31.5	46	36	46	36	1325		
	400	25	30	25	EBXXB25/30/25× 1/4 S	0405817*	61	61	62	37.0	37.0	35.5	46	50	46	41	1823		

*材料: G—碳钢; B—不锈钢。 *Material: G—Carbon steel; B—Stainless steel.

BDGUN

变径内螺纹接头—U型弹性密封

Male-female reducer with U-spring seal



Fig.A


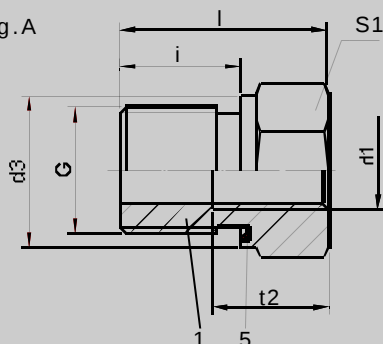


Fig.B

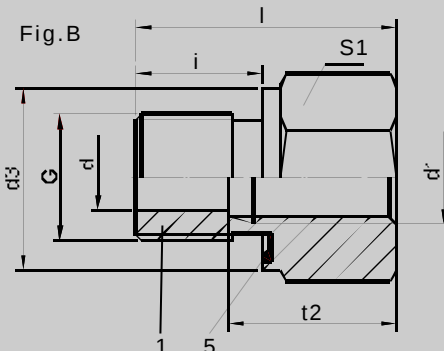

Part1—本体Reducing

Part5—U形圈U-ring

BDGUN

订货示例: 型号为BDGUN1/8×1/4, 材料为碳钢, 仅供本体和U型圈时, 订货号为0405901G Part1+5.

Order example: Type is BDGUN1/8×1/4, material is carbon steel, only ordering reducing and U-ring, the reference is 0405901G Part1+5.

外螺纹 G	内螺纹 d1	PN	Type 型号	Reference 订货号 BDGUN	l	i	S1	d	d3	t2	Fig	Weight 重量(g) BDGUN
G1/8A	G1/4	400	BDGUN1/8×1/4	0405101*	31.0	8	19	4	14	17.0	B	41
G1/8A	G3/8	400	BDGUN1/8×3/8	0405902*	32.0	8	24	4	14	17.0	B	63
G1/4A	G1/8	400	BDGUN1/4×1/8	0405903*	29.0	12	19	5	19	12.0	B	41
G1/4A	G3/8	400	BDGUN1/4×3/8	0405904*	36.0	12	24	5	19	17.0	B	69
G1/4A	G1/2	400	BDGUN1/4×1/2	0405905*	40.0	12	30	5	19	20.0	B	120
G1/4A	G3/4	400	BDGUN1/4×3/4	0405906*	43.0	12	36	5	19	22.0	B	171
G3/8A	G1/8	400	BDGUN3/8×1/8	0405907*	22.5	12	22		22	8.0	A	38
G3/8A	G1/4	400	BDGUN3/8×1/4	0405908*	36.0	12	22	8	22	17.0	B	68
G3/8A	G1/2	400	BDGUN3/8×1/2	0405909*	41.0	12	30	8	22	20.0	B	124
G3/8A	G3/4	315	BDGUN3/8×3/4	0405910*	44.0	12	36	8	22	22.0	B	182
G1/2A	G1/8	400	BDGUN1/2×1/8	0405911*	24.0	14	27		27	8.0	A	65
G1/2A	G1/4	400	BDGUN1/2×1/4	0405912*	24.0	14	27		27	12.0	A	56
G1/2A	G3/8	400	BDGUN1/2×3/8	0405913*	37.0	14	27	12	27	17.0	B	95
G1/2A	G3/4	315	BDGUN1/2×3/4	0405914*	46.0	14	36	12	27	22.0	B	183
G1/2A	G1	315	BDGUN1/2×1	0405915*	49.0	14	41	12	27	24.5	B	232
G1/2A	G11/4	315	BDGUN1/2×11/4	0405916*	53.0	14	55	10	27	26.5	B	481
G3/4A	G1/4	315	BDGUN3/4×1/4	0405917*	26.0	16	32		32	12.0	A	103
G3/4A	G3/8	315	BDGUN3/4×3/8	0405918*	26.0	16	32		32	12.0	A	86
G3/4A	G1/2	315	BDGUN3/4×1/2	0405919*	43.0	16	32	16	32	20.0	B	156
G3/4A	G1	315	BDGUN3/4×1	0405920*	51.0	16	41	16	32	24.5	B	237
G3/4A	G11/4	315	BDGUN3/4×11/4	0405921*	55.0	16	55	16	32	26.5	B	486
G3/4A	G11/2	250	BDGUN3/4×11/2	0405922*	57.0	16	60	16	32	28.5	B	561
G1A	G1/4	315	BDGUN1×1/4	0405923*	29.0	18	41		40	12.0	A	197
G1A	G3/8	315	BDGUN1×3/8	0405924*	29.0	18	41		40	12.0	A	179
G1A	G1/2	315	BDGUN1×1/2	0405925*	29.0	18	41		40	14.0	A	153
G1A	G3/4	315	BDGUN1×3/4	0405926*	49.0	18	41	20	40	22.0	B	290
G1A	G11/4	315	BDGUN1×11/4	0405927*	57.0	18	55	20	40	26.5	B	503
G1A	G11/2	250	BDGUN1×11/2	0405928*	59.0	18	60	20	40	28.5	B	585
G11/4A	G1/2	315	BDGUN11/4×1/2	0405929*	32.0	20	50		50	14.0	A	313
G11/4A	G3/4	315	BDGUN11/4×3/4	0405930*	32.0	20	50		50	16.0	A	393
G11/4A	G1	315	BDGUN11/4×1	0405931*	50.0	20	50	25	50	24.5	B	469
G11/4A	G11/2	250	BDGUN11/4×11/2	0405932*	60.0	20	60	25	50	28.5	B	624
G11/2A	G1/2	250	BDGUN11/2×1/2	0405933*	36.0	22	55		55	14.0	A	470
G11/2A	G3/4	250	BDGUN11/2×3/4	0405934*	36.0	22	55		55	16.0	A	415
G11/2A	G1	250	BDGUN11/2×1	0405935*	36.0	22	55		55	18.0	A	338
G11/2A	G11/4	250	BDGUN11/2×11/4	0405936*	58.0	22	55	32	55	26.5	B	542
G2A	G11/2	160	BDGUN2×11/2	0405937*	65.0	24	75	40	75	28.5	B	1309



*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.

上海欧际冶金机械制造有限公司

地址: 上海市宝山区富联路1188号

电话: 021-66047188 66047818 传真: 021-66047588

B59

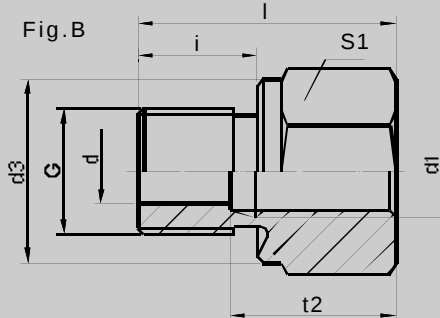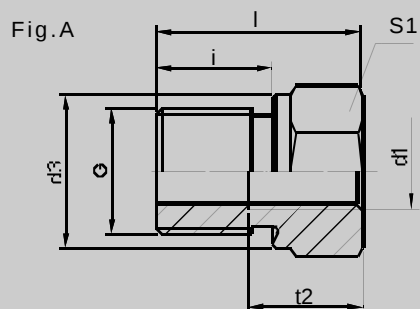

BDGLN


外螺纹 G	内螺纹 d1	PN	Type 型号	Reference 订货号 BDGLN	l	i	S1	d	d3	t2	Fig	Weight 重量(g) BDGLN
G1/8A	G1/4	400	BDGLN1/8×1/4	0406001*	31.0	8	19	4	14	17.0	B	42
G1/8A	G3/8	400	BDGLN1/8×3/8	0406002*	32.0	8	24	4	14	17.0	B	63
G1/4A	G1/8	400	BDGLN1/4×1/8	0406003*	28.0	12	19	5	18	12.0	B	38
G1/4A	G3/8	400	BDGLN1/4×3/8	0406004*	36.0	12	24	5	18	17.0	B	69
G1/4A	G1/2	400	BDGLN1/4×1/2	0406005*	40.0	12	30	5	18	20.0	B	116
G1/4A	G3/4	315	BDGLN1/4×3/4	0406006*	43.0	12	36	5	18	22.0	B	170
G3/8A	G1/8	400	BDGLN3/8×1/8	0406007*	22.5	12	22		22	8.0	A	39
G3/8A	G1/4	400	BDGLN3/8×1/4	0406008*	36.0	12	22	8	22	17.0	B	68
G3/8A	G1/2	400	BDGLN3/8×1/2	0406009*	41.0	12	30	8	22	20.0	B	125
G3/8A	G3/4	315	BDGLN3/8×3/4	0406010*	44.0	12	36	8	22	22.0	B	183
G1/2A	G1/8	400	BDGLN1/2×1/8	0406011*	24.0	14	27		26	8.0	A	66
G1/2A	G1/4	315	BDGLN1/2×1/4	0406012*	24.0	14	27		26	12.0	A	56
G1/2A	G3/8	315	BDGLN1/2×3/8	0406013*	36.0	14	27	12	26	17.0	B	94
G1/2A	G3/4	315	BDGLN1/2×3/4	0406014*	46.0	14	36	12	26	22.0	B	182
G1/2A	G1	315	BDGLN1/2×1	0406015*	49.0	14	41	12	26	24.5	B	221
G1/2A	G11/4	160	BDGLN1/2×11/4	0406016*	53.0	14	55	10	26	26.5	B	482
G3/4A	G1/4	315	BDGLN3/4×1/4	0406017*	26.0	16	32		32	12.0	A	103
G3/4A	G3/8	315	BDGLN3/4×3/8	0406018*	26.0	16	32		32	12.0	A	87
G3/4A	G1/2	315	BDGLN3/4×1/2	0406019*	41.0	16	32	16	32	20.0	B	143
G3/4A	G1	315	BDGLN3/4×1	0406020*	51.0	16	41	16	32	24.5	B	235
G3/4A	G11/4	160	BDGLN3/4×11/4	0406021*	55.0	16	55	16	32	26.5	B	481
G3/4A	G11/2	160	BDGLN3/4×11/2	0406022*	57.0	16	60	16	32	28.5	B	560
G1A	G1/4	315	BDGLN1×1/4	0406023*	29.0	18	41		39	12.0	A	195
G1A	G3/8	315	BDGLN1×3/8	0406024*	29.0	18	41		39	12.0	A	179
G1A	G1/2	315	BDGLN1×1/2	0406025*	29.0	18	41		39	14.0	A	157
G1A	G3/4	315	BDGLN1×3/4	0406026*	47.0	18	41	20	39	22.0	B	278
G1A	G11/4	160	BDGLN1×11/4	0406027*	57.0	18	55	20	39	26.5	B	530
G1A	G11/2	160	BDGLN1×11/2	0406028*	59.0	18	60	20	39	28.5	B	585
G11/4A	G1/2	160	BDGLN11/4×1/2	0406029*	32.0	20	50		49	14.0	A	308
G11/4A	G3/4	160	BDGLN11/4×3/4	0406030*	32.0	20	50		49	16.0	A	267
G11/4A	G1	160	BDGLN11/4×1	0406031*	52.0	20	50	25	49	24.5	B	458
G11/4A	G11/2	160	BDGLN11/4×11/2	0406032*	60.0	20	60	25	49	28.5	B	616
G11/2A	G1/2	160	BDGLN11/2×1/2	0406033*	36.0	22	55		55	14.0	A	477
G11/2A	G3/4	160	BDGLN11/2×3/4	0406034*	36.0	22	55		55	16.0	A	402
G11/2A	G1	160	BDGLN11/2×1	0406035*	36.0	22	55		55	18.0	A	337
G11/2A	G11/4	160	BDGLN11/2×11/4	0406036*	58.0	22	55	32	55	26.5	B	542
G2A	G11/2	160	BDGLN2×11/2	0406037*	62.0	24	70	40	68	28.5	B	990

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbonsteel; B—Stainlesssteel; T—brass.

BWXXW

组合变径接头

Adjustablereducingunion

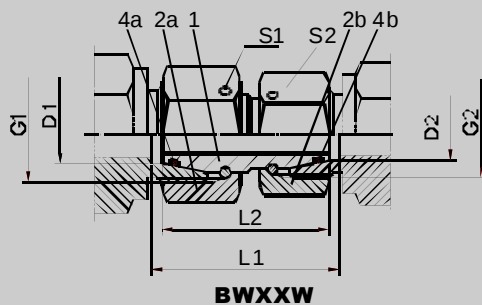

Part1—本体Body

Part2a, 2b—螺母Nut

Part4a, 4b—O形圈O-ring

订货示例: 型号为BWXXW06L/06S, 材料为碳钢, 仅供本体时, 订货号为0406101G Part1.

Orderexample: Typeis BWXXW06L/06S, materialiscarbonsteel, onlyorderingbody, thereferenceis 0406101G Part1.

Series 系列	PN	Tube OD 管子外径		Type 型号	Reference 订货号		G1	G2	L1	L2	S1	S2	Weight 重量(g) BWXXW
		D1	D2		BWXXW								
L/S	315	06	06	BWXXW06L/06S	0406101*		M14×1.5	M12×1.5	33.0	32	17	14	34
L	315	08	06	BWXXW08L/06L	0406102*		M14×1.5	M12×1.5	33.0	32	17	14	36
L/S	315	08	08	BWXXW08L/08S	0406103*		M16×1.5	M14×1.5	34.0	33	19	17	48
L	315	10	06	BWXXW10L/06L	0406104*		M16×1.5	M12×1.5	34.0	33	19	14	44
L	315	10	08	BWXXW10L/08L	0406105*		M16×1.5	M14×1.5	34.0	33	19	17	50
L/S	315	10	10	BWXXW10L/10S	0406106*		M18×1.5	M16×1.5	34.5	33	22	19	63
L	315	12	06	BWXXW12L/06L	0406107*		M18×1.5	M12×1.5	34.0	33	22	14	56
L	315	12	08	BWXXW12L/08L	0406108*		M18×1.5	M14×1.5	34.0	33	22	17	62
L	315	12	10	BWXXW12L/10L	0406109*		M18×1.5	M16×1.5	34.0	33	22	19	65
L/S	315	12	12	BWXXW12L/12S	0406110*		M20×1.5	M18×1.5	37.5	36	24	22	85
L	315	15	08	BWXXW15L/08L	0406111*		M22×1.5	M14×1.5	39.0	38	27	17	98
L	315	15	10	BWXXW15L/10L	0406112*		M22×1.5	M16×1.5	39.0	38	27	19	101
L	315	15	12	BWXXW15L/12L	0406113*		M22×1.5	M18×1.5	39.0	38	27	22	108
L	315	18	10	BWXXW18L/10L	0406114*		M26×1.5	M16×1.5	37.5	36	32	19	125
L	315	18	12	BWXXW18L/12L	0406115*		M26×1.5	M18×1.5	37.5	36	32	22	132
L	315	18	15	BWXXW18L/15L	0406116*		M26×1.5	M22×1.5	39.5	38	32	27	155
L/S	315	18	16	BWXXW18L/16S	0406117*		M26×1.5	M24×1.5	41.5	39	32	30	177
L	160	22	12	BWXXW22L/12L	0406118*		M30×2	M18×1.5	43.5	42	36	22	195
L	160	22	15	BWXXW22L/15L	0406119*		M30×2	M22×1.5	43.5	42	36	27	215
L	160	22	18	BWXXW22L/18L	0406120*		M30×2	M26×1.5	44.0	42	36	32	228
L/S	160	22	20	BWXXW22L/20S	0406121*		M30×2	M30×2	47.0	44	36	36	266
L	160	28	15	BWXXW28L/15L	0406122*		M36×2	M22×1.5	47.5	46	41	27	143
L	160	28	18	BWXXW28L/18L	0406123*		M36×2	M26×1.5	48.0	46	41	32	311
L	160	28	22	BWXXW28L/22L	0406124*		M36×2	M30×2	46.0	46	41	36	309
L/S	160	28	25	BWXXW28L/25S	0406125*		M36×2	M36×2	50.5	46	41	46	419
L	160	35	18	BWXXW35L/18L	0406126*		M45×2	M26×1.5	51.0	48	50	32	430
L	160	35	22	BWXXW35L/22L	0406127*		M45×2	M30×2	51.0	48	50	36	429
L	160	35	28	BWXXW35L/28L	0406128*		M45×2	M36×2	51.0	48	50	41	415
L/S	160	35	30	BWXXW35L/30S	0406129*		M45×2	M42×2	59.0	52	50	50	577
L	160	42	22	BWXXW42L/22L	0406130*		M52×2	M30×2	55.5	52	60	36	653
L	160	42	28	BWXXW42L/28L	0406131*		M52×2	M36×2	55.5	52	60	41	648
L	160	42	35	BWXXW42L/35L	0406132*		M52×2	M45×2	56.5	52	60	50	662
L/S	160	42	38	BWXXW42L/38S	0406133*		M52×2	M52×2	62.0	52	60	60	822
S	630	08	06	BWXXW08S/06S	0406134*		M16×1.5	M14×1.5	34.0	33	19	17	49
S	630	10	06	BWXXW10S/06S	0406135*		M18×1.5	M14×1.5	34.5	33	22	17	60
S	630	10	08	BWXXW10S/08S	0406136*		M18×1.5	M16×1.5	34.5	33	22	19	66
S	630	12	06	BWXXW12S/06S	0406137*		M20×1.5	M14×1.5	37.5	36	24	17	77
S	630	12	08	BWXXW12S/08S	0406138*		M20×1.5	M16×1.5	37.5	36	24	19	82
S	630	12	10	BWXXW12S/10S	0406139*		M20×1.5	M18×1.5	38.0	36	24	22	89
S	400	16	10	BWXXW16S/10S	0406140*		M24×1.5	M18×1.5	41.5	39	30	22	138
S	400	16	12	BWXXW16S/12S	0406141*		M24×1.5	M20×1.5	41.5	39	30	24	143
S/L	315	16	15	BWXXW16S/15L	0406142*		M24×1.5	M22×1.5	41.0	39	30	27	153
S	400	20	12	BWXXW20S/12S	0406143*		M30×2	M20×1.5	47.0	44	36	24	204
S	400	20	16	BWXXW20S/16S	0406144*		M30×2	M24×1.5	47.5	44	36	30	232
S/L	315	20	18	BWXXW20S/18L	0406145*		M30×2	M26×1.5	47.0	44	36	32	224
S	400	25	16	BWXXW25S/16S	0406146*		M36×2	M24×1.5	51.0	46	46	30	224
S	400	25	20	BWXXW25S/20S	0406147*		M36×2	M30×2	51.5	46	46	36	364
S/L	160	25	22	BWXXW25S/22L	0406148*		M36×2	M30×2	50.5	46	46	36	475
S	400	30	16	BWXXW30S/16S	0406149*		M42×2	M24×1.5	58.5	52	50	30	475
S	400	30	20	BWXXW30S/20S	0406150*		M42×2	M30×2	59.0	52	50	36	500
S	400	30	25	BWXXW30S/25S	0406151*		M42×2	M36×2	60.5	52	50	46	589
S/L	160	30	28	BWXXW30S/28L	0406152*		M42×2	M36×2	58.0	52	50	41	476
S	315	38	20	BWXXW38S/20S	0406161*		M52×2	M30×2	61.5	52	60	36	671
S	315	38	25	BWXXW38S/25S	0406154*		M52×2	M36×2	63.0	52	60	46	759
S	315	38	30	BWXXW38S/30S	0406155*		M52×2	M42×2	64.5	52	60	50	767
S/L	160	38	35	BWXXW38S/35L	0406156*		M52×2	M45×2	61.5	52	60	50	662

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbonsteel; B—Stainlesssteel; T—brass.

上海欧际冶金机械制造有限公司

地址: 上海市宝山区富联路1188号


电话: 021-66047188 66047818 传真: 021-66047588

B61

BWXXA

对接式变径接头

Adjustable straight reducing union

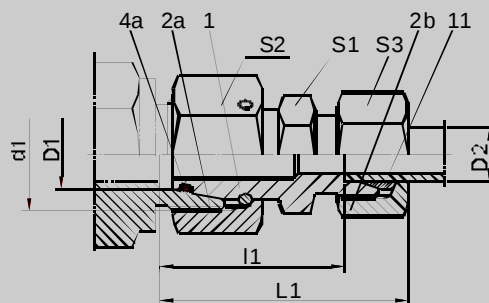

BWXXA

Part1—本体Body
Part2a, 2b—螺母Nut
Part4a, 4b—O形圈O-ring
Part11—卡套Ferrule

订货示例: 型号为BWXXA06LL/04LL, 材料为碳钢, 仅供本体时, 订货号为0406201G Part1。
Order example: Type is BWXXA06LL/04LL, material is carbon steel, only ordering body, the reference is 0406201G Part1.


Series	PN	Tube O D 管子外径		Type 型号	Reference 订货号	d1	L1	l1	S1	S2	S3	Weight 重量(g)
系列	PN	D1	D2	型号	BWXXA	d1	L1	l1	S1	S2	S3	BWXXA
L/LL	100	06	04	BWXXA06LL/04LL	0406201*	M12×1.5	34.0	24.5	9	14	10	17
L	315	08	06	BWXXA08L/06L	0406202*	M14×1.5	38.0	23.5	12	17	14	40
	315	10	06	BWXXA10L/06L	0406203*	M16×1.5	40.0	25.0	14	19	14	48
	315	10	08	BWXXA10L/08L	0406204*	M16×1.5	40.0	25.0	14	19	17	55
	315	12	06	BWXXA12L/06L	0406205*	M18×1.5	40.0	25.0	17	22	14	60
	315	12	08	BWXXA12L/08L	0406206*	M18×1.5	40.0	25.0	17	22	17	68
	315	12	10	BWXXA12L/10L	0406207*	M18×1.5	41.0	26.0	17	22	19	72
	315	15	06	BWXXA15L/06L	0406208*	M22×1.5	43.0	28.5	19	27	14	95
	315	15	08	BWXXA15L/08L	0406209*	M22×1.5	43.0	28.5	19	27	17	101
	315	15	10	BWXXA15L/10L	0406210*	M22×1.5	44.0	29.5	19	27	19	104
	315	15	12	BWXXA15L/12L	0406211*	M22×1.5	44.0	29.5	19	27	22	112
	315	18	06	BWXXA18L/06L	0406212*	M26×1.5	43.0	28.0	24	32	14	135
	315	18	08	BWXXA18L/08L	0406213*	M26×1.5	43.0	28.0	24	32	17	141
	315	18	10	BWXXA18L/10L	0406214*	M26×1.5	44.0	29.0	24	32	19	143
	315	18	12	BWXXA18L/12L	0406215*	M26×1.5	44.0	29.0	24	32	22	147
	315	18	15	BWXXA18L/15L	0406216*	M26×1.5	45.0	30.0	24	32	27	165
L/S	315	18	16	BWXXA18L/16S	0406217*	M26×1.5	49.5	31.5	27	32	30	209
	160	22	06	BWXXA22L/06L	0406218*	M30×2.0	47.0	32.0	27	36	14	200
	160	22	08	BWXXA22L/08L	0406219*	M30×2.0	47.0	32.0	27	36	17	203
	160	22	10	BWXXA22L/10L	0406220*	M30×2.0	48.0	33.0	27	36	19	208
	160	22	12	BWXXA22L/12L	0406221*	M30×2.0	48.0	33.0	27	36	22	210
	160	22	15	BWXXA22L/15L	0406222*	M30×2.0	49.0	34.0	27	36	27	227
L/S	160	22	16	BWXXA22L/16S	0406223*	M30×2.0	52.5	34.5	27	36	30	261
	160	22	18	BWXXA22L/18L	0406224*	M30×2.0	50.0	33.5	27	36	32	242
L/S	160	22	20	BWXXA22L/20S	0406225*	M30×2.0	56.0	34.5	32	36	36	316
	160	28	06	BWXXA28L/06L	0406226*	M36×2.0	49.0	34.0	32	41	14	276
	160	28	08	BWXXA28L/08L	0406227*	M36×2.0	49.0	34.0	32	41	17	290
	160	28	10	BWXXA28L/10L	0406228*	M36×2.0	50.0	35.0	32	41	19	283
	160	28	12	BWXXA28L/12L	0406229*	M36×2.0	50.0	35.0	32	41	22	286
	160	28	15	BWXXA28L/15L	0406230*	M36×2.0	51.0	36.0	32	41	27	309
	160	28	16	BWXXA28L/16L	0406231*	M36×2.0	54.5	36.5	32	41	30	339
	160	28	18	BWXXA28L/18L	0406232*	M36×2.0	52.0	35.5	32	41	32	319
	160	28	22	BWXXA28L/22L	0406233*	M36×2.0	54.0	37.5	32	41	36	328
L/S	160	28	25	BWXXA28L/25S	0406234*	M36×2.0	62.0	38.0	41	41	46	538
	160	35	06	BWXXA35L/06L	0406235*	M45×2.0	52.0	37.0	41	50	14	329
	160	35	08	BWXXA35L/08L	0406236*	M45×2.0	52.0	37.0	41	50	17	336
	160	35	10	BWXXA35L/10L	0406237*	M45×2.0	53.0	38.0	41	50	19	339
	160	35	12	BWXXA35L/12L	0406238*	M45×2.0	53.0	38.0	41	50	22	353
	160	35	15	BWXXA35L/15L	0406239*	M45×2.0	54.0	39.0	41	50	27	374
	160	35	18	BWXXA35L/18L	0406240*	M45×2.0	55.0	38.5	41	50	32	396
	160	35	22	BWXXA35L/22L	0406241*	M45×2.0	57.0	40.5	41	50	36	420
L/S	160	35	25	BWXXA35L/25S	0406242*	M45×2.0	64.0	40.0	41	50	46	581
	160	35	28	BWXXA35L/28L	0406243*	M45×2.0	57.0	40.5	41	50	41	425
L/S	160	35	30	BWXXA35L/30S	0406244*	M45×2.0	68.0	41.5	46	50	50	672
	160	42	10	BWXXA42L/10L	0406245*	M52×2.0	56.0	41.5	50	60	19	558
	160	42	12	BWXXA42L/12L	0406246*	M52×2.0	56.0	41.5	50	60	22	566
	160	42	15	BWXXA42L/15L	0406247*	M52×2.0	58.0	42.5	50	60	27	580
	160	42	18	BWXXA42L/18L	0406248*	M52×2.0	58.0	42.0	50	60	32	612
	160	42	22	BWXXA42L/22L	0406249*	M52×2.0	60.0	44.0	50	60	36	632
	160	42	28	BWXXA42L/28L	0406250*	M52×2.0	61.0	44.0	50	60	41	637
L/S	160	42	30	BWXXA42L/30S	0406251*	M52×2.0	70.5	44.0	50	60	50	825
	160	42	35	BWXXA42L/35L	0406252*	M52×2.0	65.0	43.0	50	60	50	697
L/S	160	42	38	BWXXA42L/38S	0406253*	M52×2.0	76.0	45.5	55	60	60	1062

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.

BWXXA

对接式变径接头

Adjustable straight reducing union

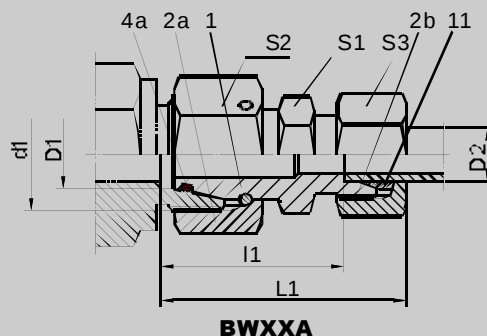

Part1—本体Body
Part2a, 2b—螺母Nut
Part4a, 4b—O形圈O-ring
Part11—卡套Ferrule

订货示例：型号为BWXXA08S/06S，材料为碳钢，仅供本体时，订货号为0406301G Part1。
Order example: Type is BWXXA08S/06S, material is carbon steel, only ordering body, the reference is 0406301G Part1.

Series 系列	Tube OD 管子外径			Type 型号	Reference 订货号	d1	L1	l1	S1	S2	S3	Weight 重量(g)
PN	D1	D2			BWXXA							BWXXA
S	630	08	06	BWXXA08S/06S	0406301*	M16×1.5	42.0	27.0	14	19	17	61
	630	10	06	BWXXA10S/06S	0406302*	M18×1.5	42.0	27.5	17	22	17	70
	630	10	08	BWXXA10S/08S	0406303*	M18×1.5	42.0	27.5	17	22	19	80
	630	12	06	BWXXA12S/06S	0406304*	M20×1.5	44.0	29.0	17	24	17	85
	630	12	08	BWXXA12S/08S	0406305*	M20×1.5	44.0	29.0	17	24	19	92
	630	12	10	BWXXA12S/10S	0406306*	M20×1.5	46.0	29.5	19	24	22	109
	630	14	06	BWXXA14S/06S	0406307*	M22×1.5	46.0	31.5	19	27	17	115
	630	14	08	BWXXA14S/08S	0406308*	M22×1.5	46.0	31.5	19	27	19	119
	630	14	10	BWXXA14S/10S	0406309*	M22×1.5	47.0	31.0	19	27	22	129
	630	14	12	BWXXA14S/12S	0406310*	M22×1.5	47.0	31.0	22	27	24	138
S/L	400	16	06	BWXXA16S/06S	0406311*	M24×1.5	47.0	32.0	22	30	17	144
	400	16	08	BWXXA16S/08S	0406312*	M24×1.5	47.0	32.0	22	30	19	150
	400	16	10	BWXXA16S/10S	0406313*	M24×1.5	48.0	31.5	22	30	22	158
	400	16	12	BWXXA16S/12S	0406314*	M24×1.5	48.0	31.5	22	30	24	163
	315	16	15	BWXXA16S/15L	0406315*	M24×1.5	47.0	32.0	24	30	27	174
	400	16	14	BWXXA16S/14S	0406316*	M24×1.5	51.0	33.0	24	30	27	186
	400	20	06	BWXXA20S/06S	0406317*	M30×2.0	51.0	36.0	27	36	17	213
	400	20	08	BWXXA20S/08S	0406318*	M30×2.0	51.0	36.0	27	36	19	216
	400	20	10	BWXXA20S/10S	0406319*	M30×2.0	52.0	35.5	27	36	22	226
	400	20	12	BWXXA20S/12S	0406320*	M30×2.0	52.0	35.5	27	36	24	231
S/L	400	20	14	BWXXA20S/14S	0406321*	M30×2.0	55.0	37.0	27	36	27	252
	315	20	15	BWXXA20S/15L	0406322*	M30×2.0	51.0	36.0	27	36	27	227
	400	20	16	BWXXA20S/16S	0406323*	M30×2.0	55.0	36.5	27	36	30	260
	315	20	18	BWXXA20S/18L	0406324*	M30×2.0	51.0	35.5	27	36	32	246
	400	25	06	BWXXA25S/06S	0406325*	M36×2.0	53.0	38.5	32	46	17	351
	400	25	08	BWXXA25S/08S	0406326*	M36×2.0	53.0	38.5	32	46	19	353
	400	25	10	BWXXA25S/10S	0406327*	M36×2.0	54.0	38.0	32	46	22	364
	400	25	12	BWXXA25S/12S	0406328*	M36×2.0	54.0	38.0	32	46	24	368
	400	25	14	BWXXA25S/14S	0406329*	M36×2.0	57.0	39.5	32	46	27	389
	400	25	16	BWXXA25S/16S	0406330*	M36×2.0	57.0	39.0	32	46	30	399
S/L	315	25	18	BWXXA25S/18L	0406331*	M36×2.0	54.0	38.0	32	46	32	235
	400	25	20	BWXXA25S/20S	0406332*	M36×2.0	61.0	39.0	32	46	36	440
	160	25	22	BWXXA25S/22L	0406333*	M36×2.0	56.0	40.0	32	46	36	393
	400	30	06	BWXXA30S/06S	0406334*	M42×2.0	59.0	44.0	41	50	17	431
	400	30	08	BWXXA30S/08S	0406335*	M42×2.0	59.0	44.0	41	50	19	426
	400	30	10	BWXXA30S/10S	0406336*	M42×2.0	60.0	43.5	41	50	22	439
	400	30	12	BWXXA30S/12S	0406337*	M42×2.0	60.0	43.5	41	50	24	443
	400	30	14	BWXXA30S/14S	0406338*	M42×2.0	63.0	45.0	41	50	27	466
	400	30	16	BWXXA30S/16S	0406339*	M42×2.0	63.0	44.5	41	50	30	489
	400	30	20	BWXXA30S/20S	0406340*	M42×2.0	66.0	44.5	41	50	36	535
S/L	160	30	22	BWXXA30S/22L	0406341*	M42×2.0	61.0	45.5	41	50	36	521
	400	30	25	BWXXA30S/25S	0406342*	M42×2.0	69.0	45.0	41	50	46	670
	160	30	28	BWXXA30S/28L	0406343*	M42×2.0	62.0	45.5	41	50	41	533
	315	38	06	BWXXA38S/06S	0406344*	M52×2.0	62.0	47.5	50	60	17	575
	315	38	08	BWXXA38S/08S	0406345*	M52×2.0	62.0	47.5	50	60	19	603
	315	38	10	BWXXA38S/10S	0406346*	M52×2.0	63.0	47.0	50	60	22	613
	315	38	12	BWXXA38S/12S	0406347*	M52×2.0	63.0	47.0	50	60	24	614
	315	38	14	BWXXA38S/14S	0406348*	M52×2.0	66.0	48.5	50	60	27	633
	315	38	16	BWXXA38S/16S	0406349*	M52×2.0	66.0	48.0	50	60	30	651
	315	38	20	BWXXA38S/20S	0406350*	M52×2.0	70.0	48.0	50	60	36	715
S/L	315	38	25	BWXXA38S/25S	0406351*	M52×2.0	73.0	48.5	50	60	46	830
	160	38	28	BWXXA38S/28L	0406352*	M52×2.0	65.0	49.0	50	60	41	671
	315	38	30	BWXXA38S/30S	0406353*	M52×2.0	76.0	49.0	50	60	50	863
	160	38	35	BWXXA38S/35L	0406354*	M52×2.0	69.0	48.0	50	60	50	744

*材料：G—碳钢；B—不锈钢；T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.

上海欧际冶金机械制造有限公司

地址：上海市宝山区富联路1188号


电话：021-66047188 66047818 传真：021-66047588

B63

BWXXB

对接式变径接头

Adjustable straight reducing union

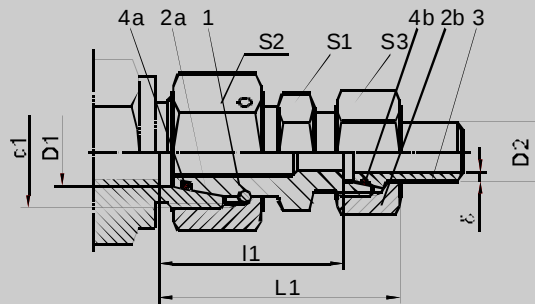

BWXXB

Part1—本体Body
Part2a, 2b—螺母Nut
Part3—焊接头Weldingcone
Part4a, 4b—O形圈O-ring

订货示例: 型号为BWXXB08L/06L× Φ , 材料为碳钢, 仅供本体时, 订货号为0406401G Part1。
Order example: Type is BWXXB08L/06L× Φ , material is carbon steel, only ordering body, the reference is 0406401G Part1.


Series 系列	PN	Tube OD 管子外径		Type 型号	Reference 订货号		d1	L1	l1	S1	S2	S3	Weight 重量(g)	
		D1	D2		BWXXB								BWXXB	
L	315	08	06	BWXXB08L/06L× Φ	0406401*		M14×1.5	38.0	23.5	12	17	14	47	
	315	10	06	BWXXB10L/06L× Φ	0406402*		M16×1.5	40.0	25.0	14	19	14	55	
	315	10	08	BWXXB10L/08L× Φ	0406403*		M16×1.5	40.0	25.0	14	19	17	64	
	315	12	06	BWXXB12L/06L× Φ	0406404*		M18×1.5	40.0	25.0	17	22	14	67	
	315	12	08	BWXXB12L/08L× Φ	0406405*		M18×1.5	40.0	25.0	17	22	17	77	
	315	12	10	BWXXB12L/10L× Φ	0406406*		M18×1.5	41.0	26.0	17	22	19	88	
	315	15	06	BWXXB15L/06L× Φ	0406407*		M22×1.5	43.0	28.5	19	27	14	102	
	315	15	08	BWXXB15L/08L× Φ	0406408*		M22×1.5	43.0	28.5	19	27	17	110	
	315	15	10	BWXXB15L/10L× Φ	0406409*		M22×1.5	44.0	29.5	19	27	19	120	
	315	15	12	BWXXB15L/12L× Φ	0406410*		M22×1.5	44.0	29.5	19	27	22	133	
	315	18	06	BWXXB18L/06L× Φ	0406411*		M26×1.5	43.0	28.0	24	32	14	142	
	315	18	08	BWXXB18L/08L× Φ	0406412*		M26×1.5	43.0	28.0	24	32	17	150	
	315	18	10	BWXXB18L/10L× Φ	0406413*		M26×1.5	44.0	29.0	24	32	19	159	
	315	18	12	BWXXB18L/12L× Φ	0406414*		M26×1.5	44.0	29.0	24	32	22	168	
	315	18	15	BWXXB18L/15L× Φ	0406415*		M26×1.5	45.0	30.0	24	32	27	195	
L/S	315	18	16	BWXXB18L/16S× Φ	0406416v		M26×1.5	49.5	31.5	27	32	30	250	
	160	22	06	BWXXB22L/06L× Φ	0406417*		M30×2.0	47.0	32.0	27	36	14	207	
	160	22	08	BWXXB22L/08L× Φ	0406418*		M30×2.0	47.0	32.0	27	36	17	212	
	160	22	10	BWXXB22L/10L× Φ	0406419*		M30×2.0	48.0	33.0	27	36	19	224	
	160	22	12	BWXXB22L/12L× Φ	0406420*		M30×2.0	48.0	33.0	27	36	22	233	
L/S	160	22	15	BWXXB22L/15L× Φ	0406421*		M30×2.0	49.0	34.0	27	36	27	257	
	160	22	16	BWXXB22L/16S× Φ	0406422*		M30×2.0	52.5	34.5	27	36	30	302	
	160	22	18	BWXXB22L/18L× Φ	0406423*		M30×2.0	50.0	33.5	27	36	32	277	
L/S	160	22	20	BWXXB22L/20S× Φ	0406424*		M30×2.0	56.0	34.5	32	36	36	388	
	160	28	06	BWXXB28L/06L× Φ	0406425*		M36×2.0	49.0	34.0	32	41	14	283	
	160	28	08	BWXXB28L/08L× Φ	0406426*		M36×2.0	49.0	34.0	32	41	17	299	
L/S	160	28	10	BWXXB28L/10L× Φ	0406427*		M36×2.0	50.0	35.0	32	41	19	299	
	160	28	12	BWXXB28L/12L× Φ	0406428*		M36×2.0	50.0	35.0	32	41	22	307	
	160	28	15	BWXXB28L/15L× Φ	0406429*		M36×2.0	51.0	36.0	32	41	27	339	
	160	28	16	BWXXB28L/16L× Φ	0406430*		M36×2.0	54.5	36.5	32	41	30	380	
	160	28	18	BWXXB28L/18L× Φ	0406431*		M36×2.0	52.0	35.5	32	41	32	354	
	160	28	22	BWXXB28L/22L× Φ	0406432*		M36×2.0	54.0	37.5	32	41	36	376	
	160	28	25	BWXXB28L/25S× Φ	0406433*		M36×2.0	62.0	38.0	41	41	46	668	
	160	35	06	BWXXB35L/06L× Φ	0406434*		M45×2.0	52.0	37.0	41	50	14	336	
	160	35	08	BWXXB35L/08L× Φ	0406435*		M45×2.0	52.0	37.0	41	50	17	345	
	160	35	10	BWXXB35L/10L× Φ	0406436*		M45×2.0	53.0	38.0	41	50	19	355	
L/S	160	35	12	BWXXB35L/12L× Φ	0406437*		M45×2.0	53.0	38.0	41	50	22	374	
	160	35	15	BWXXB35L/15L× Φ	0406438*		M45×2.0	54.0	39.0	41	50	27	404	
	160	35	18	BWXXB35L/18L× Φ	0406439*		M45×2.0	55.0	38.5	41	50	32	431	
	160	35	22	BWXXB35L/22L× Φ	0406440*		M45×2.0	57.0	40.5	41	50	36	468	
	160	35	25	BWXXB35L/25S× Φ	0406441*		M45×2.0	64.0	40.0	41	50	46	711	
	160	35	28	BWXXB35L/28L× Φ	0406442*		M45×2.0	57.0	40.5	41	50	41	500	
	160	35	30	BWXXB35L/30S× Φ	0406443*		M45×2.0	68.0	41.5	46	50	50	853	
	160	42	10	BWXXB42L/10L× Φ	0406444*		M52×2.0	56.0	41.5	50	60	19	574	
	160	42	12	BWXXB42L/12L× Φ	0406445*		M52×2.0	56.0	41.5	50	60	22	587	
	160	42	15	BWXXB42L/15L× Φ	0406446*		M52×2.0	58.0	42.5	50	60	27	610	
L/S	160	42	18	BWXXB42L/18L× Φ	0406447*		M52×2.0	58.0	42.0	50	60	32	647	
	160	42	22	BWXXB42L/22L× Φ	0406448*		M52×2.0	60.0	44.0	50	60	36	680	
	160	42	28	BWXXB42L/28L× Φ	0406449*		M52×2.0	61.0	44.0	50	60	41	712	
	160	42	30	BWXXB42L/30S× Φ	0406450*		M52×2.0	70.5	44.0	50	60	50	906	
	160	42	35	BWXXB42L/35L× Φ	0406451*		M52×2.0	65.0	43.0	50	60	50	827	
	160	42	38	BWXXB42L/38S× Φ	0406452*		M52×2.0	76.0	45.5	55	60	60	1362	

*材料: G—碳钢; B—不锈钢。 *Material: G—Carbonsteel; B—Stainlesssteel.

BWXXB

对接式变径接头

Adjustable straight reducing union

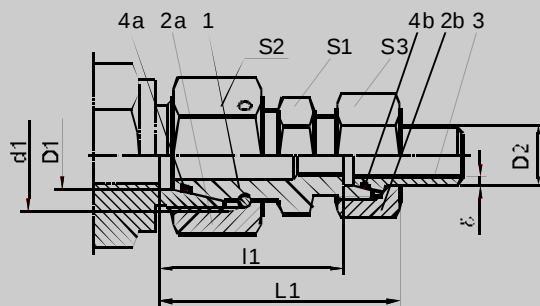

BWXXB

订货示例: 型号为BWXXB08S/06× $\frac{1}{2}$ S, 材料为碳钢, 仅供本体时, 订货号为0406501G Part1.

Order example: Type is BWXXB08S/06× $\frac{1}{2}$ S, material is carbon steel, only ordering body, the reference is 0406501G Part1.

Series 系列	PN	Tube OD 管子外径		Type 型号	Reference 订货号	d1	L1	I1	S1	S2	S3	Weight 重量(g)
		D1	D2		BWXXB							BWXXB
S	630	08	06	BWXXB08S/06× $\frac{1}{2}$ S	0406501*	M16×1.5	42.0	27.0	14	19	17	68
	630	10	06	BWXXB10S/06× $\frac{1}{2}$ S	0406502*	M18×1.5	42.0	27.5	17	22	17	77
	630	10	08	BWXXB10S/08× $\frac{1}{2}$ S	0406503*	M18×1.5	42.0	27.5	17	22	19	89
	630	12	06	BWXXB12S/06× $\frac{1}{2}$ S	0406504*	M20×1.5	44.0	29.0	17	24	17	92
	630	12	08	BWXXB12S/08× $\frac{1}{2}$ S	0406505*	M20×1.5	44.0	29.0	17	24	19	101
	630	12	10	BWXXB12S/10× $\frac{1}{2}$ S	0406506*	M20×1.5	46.0	29.5	19	24	22	125
	630	14	06	BWXXB14S/06× $\frac{1}{2}$ S	0406507*	M22×1.5	46.0	31.5	19	27	17	122
	630	14	08	BWXXB14S/08× $\frac{1}{2}$ S	0406508*	M22×1.5	46.0	31.5	19	27	19	128
	630	14	10	BWXXB14S/10× $\frac{1}{2}$ S	0406509*	M22×1.5	47.0	31.0	19	27	22	145
	630	14	12	BWXXB14S/12× $\frac{1}{2}$ S	0406510*	M22×1.5	47.0	31.0	22	27	24	159
S/L	400	16	06	BWXXB16S/06× $\frac{1}{2}$ S	0406511*	M24×1.5	47.0	32.0	22	30	17	151
	400	16	08	BWXXB16S/08× $\frac{1}{2}$ S	0406512*	M24×1.5	47.0	32.0	22	30	19	159
	400	16	10	BWXXB16S/10× $\frac{1}{2}$ S	0406513*	M24×1.5	48.0	31.5	22	30	22	174
	400	16	12	BWXXB16S/12× $\frac{1}{2}$ S	0406514*	M24×1.5	48.0	31.5	22	30	24	184
	315	16	15	BWXXB16S/15× $\frac{1}{2}$ L	0406515*	M24×1.5	47.0	32.0	24	30	27	204
	400	16	14	BWXXB16S/14× $\frac{1}{2}$ S	0406516*	M24×1.5	51.0	33.0	24	30	27	210
	400	20	06	BWXXB20S/06× $\frac{1}{2}$ S	0406517*	M30×2.0	51.0	36.0	27	36	17	220
	400	20	08	BWXXB20S/08× $\frac{1}{2}$ S	0406518*	M30×2.0	51.0	36.0	27	36	19	225
	400	20	10	BWXXB20S/10× $\frac{1}{2}$ S	0406519*	M30×2.0	52.0	35.5	27	36	22	242
	400	20	12	BWXXB20S/12× $\frac{1}{2}$ S	0406520*	M30×2.0	52.0	35.5	27	36	24	252
S/L	400	20	14	BWXXB20S/14× $\frac{1}{2}$ S	0406521*	M30×2.0	55.0	37.0	27	36	27	276
	315	20	15	BWXXB20S/15× $\frac{1}{2}$ L	0406522*	M30×2.0	51.0	36.0	27	36	27	257
	400	20	16	BWXXB20S/16× $\frac{1}{2}$ S	0406523*	M30×2.0	55.0	36.5	27	36	30	301
	315	20	18	BWXXB20S/18× $\frac{1}{2}$ L	0406524*	M30×2.0	51.0	35.5	27	36	32	281
	400	25	06	BWXXB25S/06× $\frac{1}{2}$ S	0406525*	M36×2.0	53.0	38.5	32	46	17	358
	400	25	08	BWXXB25S/08× $\frac{1}{2}$ S	0406526*	M36×2.0	53.0	38.5	32	46	19	362
	400	25	10	BWXXB25S/10× $\frac{1}{2}$ S	0406527*	M36×2.0	54.0	38.0	32	46	22	380
	400	25	12	BWXXB25S/12× $\frac{1}{2}$ S	0406528*	M36×2.0	54.0	38.0	32	46	24	389
	400	25	14	BWXXB25S/14× $\frac{1}{2}$ S	0406529*	M36×2.0	57.0	39.5	32	46	27	413
	400	25	16	BWXXB25S/16× $\frac{1}{2}$ S	0406530*	M36×2.0	57.0	39.0	32	46	30	440
S/L	315	25	18	BWXXB25S/18× $\frac{1}{2}$ L	0406531*	M36×2.0	54.0	38.0	32	46	32	270
	400	25	20	BWXXB25S/20× $\frac{1}{2}$ S	0406532*	M36×2.0	61.0	39.0	32	46	36	512
	160	25	22	BWXXB25S/22× $\frac{1}{2}$ L	0406533*	M36×2.0	56.0	40.0	32	46	36	441
	400	30	06	BWXXB30S/06× $\frac{1}{2}$ S	0406534*	M42×2.0	59.0	44.0	41	50	17	438
	400	30	08	BWXXB30S/08× $\frac{1}{2}$ S	0406535*	M42×2.0	59.0	44.0	41	50	19	435
	400	30	10	BWXXB30S/10× $\frac{1}{2}$ S	0406536*	M42×2.0	60.0	43.5	41	50	22	455
	400	30	12	BWXXB30S/12× $\frac{1}{2}$ S	0406537*	M42×2.0	60.0	43.5	41	50	24	464
	400	30	14	BWXXB30S/14× $\frac{1}{2}$ S	0406538*	M42×2.0	63.0	45.0	41	50	27	490
	400	30	16	BWXXB30S/16× $\frac{1}{2}$ S	0406539*	M42×2.0	63.0	44.5	41	50	30	530
	400	30	20	BWXXB30S/20× $\frac{1}{2}$ S	0406540*	M42×2.0	66.0	44.5	41	50	36	606
S/L	160	30	22	BWXXB30S/22× $\frac{1}{2}$ L	0406541*	M42×2.0	61.0	45.5	41	50	36	569
	400	30	25	BWXXB30S/25× $\frac{1}{2}$ S	0406542*	M42×2.0	69.0	45.0	41	50	46	800
	160	30	28	BWXXB30S/28× $\frac{1}{2}$ L	0406543*	M42×2.0	62.0	45.5	41	50	41	608
	315	38	06	BWXXB38S/06× $\frac{1}{2}$ S	0406544*	M52×2.0	62.0	47.5	50	60	17	582
	315	38	08	BWXXB38S/08× $\frac{1}{2}$ S	0406545*	M52×2.0	62.0	47.5	50	60	19	612
	315	38	10	BWXXB38S/10× $\frac{1}{2}$ S	0406546*	M52×2.0	63.0	47.0	50	60	22	629
	315	38	12	BWXXB38S/12× $\frac{1}{2}$ S	0406547*	M52×2.0	63.0	47.0	50	60	24	635
	315	38	14	BWXXB38S/14× $\frac{1}{2}$ S	0406548*	M52×2.0	66.0	48.5	50	60	27	657
	315	38	16	BWXXB38S/16× $\frac{1}{2}$ S	0406549*	M52×2.0	66.0	48.0	50	60	30	692
	315	38	20	BWXXB38S/20× $\frac{1}{2}$ S	0406550*	M52×2.0	70.0	48.0	50	60	36	787
S/L	315	38	25	BWXXB38S/25× $\frac{1}{2}$ S	0406551*	M52×2.0	73.0	48.5	50	60	46	960
	160	38	28	BWXXB38S/28× $\frac{1}{2}$ L	0406552*	M52×2.0	65.0	49.0	50	60	41	746
	315	38	30	BWXXB38S/30× $\frac{1}{2}$ S	0406553*	M52×2.0	76.0	49.0	50	60	50	1044
	160	38	35	BWXXB38S/35× $\frac{1}{2}$ L	0406554*	M52×2.0	69.0	48.0	50	60	50	874

*材料: G—碳钢; B—不锈钢。 *Material: G—Carbon steel; B—Stainless steel.

上海欧际冶金机械制造有限公司

地址: 上海市宝山区富联路1188号


电话: 021-66047188 66047818 传真: 021-66047588

B65

LDZXA

端直角接头—公制锥螺纹

Maleelbowconnectingunion—Metriccone pipethread

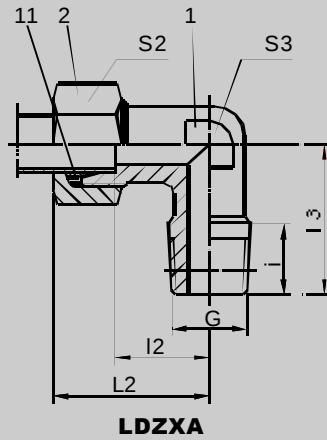

Part1—本体Elbowbody
Part2—螺母Nut
Part11—卡套Ferrule

LDZXA

订货示例：型号为LDZXA04LL，材料为碳钢，仅供本体和螺母时，订货号为0506601G Part1+2。

Orderexample: Typeis LDZXA04LL, materialiscarbonsteel, onlyorderingelbowbodyandnut, thereferenceis0506601G Part1+2.


Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号 LDZXA	G	L2	I2	I3	i	S2	S3	Weight 重量(g) LDZXA
LL	100	04	LDZXA04LL	0506601*	M8×1tap.	21	11.0	17	9.5	10	9	18
	100	06	LDZXA06LL	0506602*	M10×1tap.	21	9.5	17	9.5	12	11	23
	100	08	LDZXA08LL	0506603*	M10×1tap.	23	11.5	20	9.5	14	12	31
L	315	06	LDZXA06L	0506604*	M10×1tap.	27	12.0	20	9.5	14	12	41
	315	08	LDZXA08L	0506605*	M12×1.5tap.	29	14.0	26	14.0	17	14	63
	315	10	LDZXA10L	0506606*	M14×1.5tap.	30	15.0	27	14.0	19	17	83
	315	12	LDZXA12L	0506607*	M16×1.5tap.	32	17.0	28	14.0	22	19	118
	315	15	LDZXA15L	0506608*	M18×1.5tap.	36	21.0	32	14.0	27	19	124
	315	18	LDZXA18L	0506609*	M22×1.5tap.	40	23.0	36	17.0	32	24	184
S	400	06	LDZXA06S	0506610*	M12×1.5tap.	31	16.0	26	14.0	17	14	72
	400	08	LDZXA08S	0506611*	M14×1.5tap.	32	17.0	27	14.0	19	17	100
	400	10	LDZXA10S	0506612*	M16×1.5tap.	34	17.5	28	14.0	22	19	136
	400	12	LDZXA12S	0506613*	M18×1.5tap.	38	21.5	28	14.0	24	22	171
	400	14	LDZXA14S	0506614*	M20×1.5tap.	40	22.0	32	14.0	27	19	156
	400	16	LDZXA16S	0506615*	M22×1.5tap.	43	24.5	32	14.0	30	24	204

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbonsteel; B—Stainlesssteel; T—brass.

LDZXB

端直角接头—公制锥螺纹

Maleelbowconnectingunion—Metricconepipethread

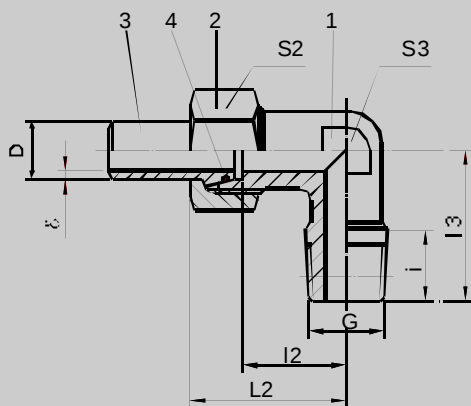

- Part1—本体Elbowbody
- Part2—螺母Nut
- Part3—焊接头Weldingcone
- Part4—O形圈O-ring

LDZXB

订货示例：型号为LDZXB06× $\frac{1}{2}$ L，材料为碳钢，仅供本体和螺母时，订货号为0506701G Part1+2。

Orderexample:Typeis LDZXB06× $\frac{1}{2}$ L,materialiscarbonsteel,onlyorderingelbowbodyandnut,thereferenceis 0506701G Part1+2.

Series 系列	PN	TubeOD 管子外径D	Type 型号	Reference 订货号								Weight 重量(g)
				LDZXB	G	L2	I2	I3	i	S2	S3	LDZXB
L	315	06	LDZXB06× $\frac{1}{2}$ L	0506701*	M10×1tap.	27	12.0	20	9.5	14	12	48
	315	08	LDZXB08× $\frac{1}{2}$ L	0506702*	M12×1.5tap.	29	14.0	26	14.0	17	14	72
	315	10	LDZXB10× $\frac{1}{2}$ L	0506703*	M14×1.5tap.	30	15.0	27	14.0	19	17	99
	315	12	LDZXB12× $\frac{1}{2}$ L	0506704*	M16×1.5tap.	32	17.0	28	14.0	22	19	139
	315	15	LDZXB15× $\frac{1}{2}$ L	0506705*	M18×1.5tap.	36	21.0	32	14.0	27	19	154
	315	18	LDZXB18× $\frac{1}{2}$ L	0506706*	M22×1.5tap.	40	23.0	36	17.0	32	24	219
S	400	06	LDZXB06× $\frac{1}{2}$ S	0506707*	M12×1.5tap.	31	16.0	26	14.0	17	14	79
	400	08	LDZXB08× $\frac{1}{2}$ S	0506708*	M14×1.5tap.	32	17.0	27	14.0	19	17	109
	400	10	LDZXB10× $\frac{1}{2}$ S	0506709*	M16×1.5tap.	34	17.5	28	14.0	22	19	152
	400	12	LDZXB12× $\frac{1}{2}$ S	0506710*	M18×1.5tap.	38	21.5	28	14.0	24	22	192
	400	14	LDZXB14× $\frac{1}{2}$ S	0506711*	M20×1.5tap.	40	22.0	32	14.0	27	19	180
	400	16	LDZXB16× $\frac{1}{2}$ S	0506712*	M22×1.5tap.	43	24.5	32	14.0	30	24	245

*材料: G—碳钢; B—不锈钢。 *Material:G—Carbonsteel;B—Stainlesssteel.

上海欧际冶金机械制造有限公司

地址: 上海市宝山区富联路1188号


电话: 021-66047188 66047818 传真: 021-66047588

B67

LDRXA

端直角接头—英制锥螺纹

Maleelbowconnectingunion—Britishstandardcone pipethread

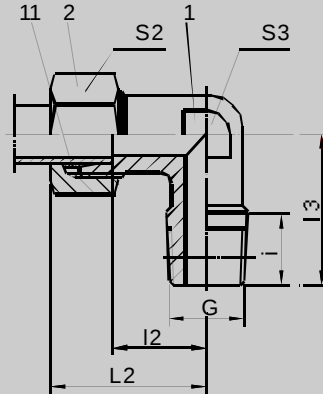

LDRXA

Part1—本体Elbowbody

Part2—螺母Nut

Part11—卡套Ferrule

订货示例：型号为LDRXA04LL，材料为碳钢，仅供本体和螺母时，订货号为0506801G Part1+2。

Orderexample:Typeis LDRXA04LL,materialiscarbonsteel,onlyorderingelbowbodyandnut,thereferenceis0506801G Part1+2.


Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号 LDRXA	G	L2	I2	I3	i	S2	S3	Weight 重量(g) LDRXA
LL	100	04	LDRXA04LL	0506801*	R1/8tap.	21	11.0	17	9.5	10	11	22
	100	06	LDRXA06LL	0506802*	R1/8tap.	21	9.5	17	9.5	12	11	23
	100	08	LDRXA08LL	0506803*	R1/8tap.	23	11.5	20	9.5	14	12	31
	100	10	LDRXA10LL	0506804*	R1/4tap.	24	12.5	23	14.0	17	14	51
	100	12	LDRXA12LL	0506805*	R1/4tap.	25	13.0	23	14.0	19	17	61
L	315	06	LDRXA06L-R1/8	0506806*	R1/8tap.	27	12.0	20	9.5	14	12	41
	315	06	LDRXA06L-R1/4	0506807*	R1/4tap.	29	14.0	26	12.0	14	12	59
	315	08	LDRXA08L-R1/4	0506808*	R1/4tap.	29	14.0	26	14.0	17	14	64
	315	08	LDRXA08L-R1/8	0506809*	R1/8tap.	29	14.0	26	9.5	17	14	66
	315	08	LDRXA08L-R3/8	0506810*	R3/8tap.	32	27.0	28	14.0	17	19	111
	315	10	LDRXA10L-R1/4	0506811*	R1/4tap.	30	15.0	27	14.0	19	17	82
	315	10	LDRXA10L-R3/8	0506812*	R3/8tap.	32	17.0	28	14.0	19	19	113
	315	12	LDRXA12L-R3/8	0506813*	R3/8tap.	32	17.0	28	14.0	22	19	120
	315	12	LDRXA12L-R1/4	0506814*	R1/4tap.	32	17.0	27	14.0	22	19	109
	315	12	LDRXA12L-R1/2	0506815*	R1/2tap.	36	21.0	34	14.0	22	19	117
S	315	15	LDRXA15L-R1/2	0506816*	R1/2tap.	36	21.0	34	14.0	27	19	140
	315	18	LDRXA18L-R1/2	0506817*	R1/2tap.	40	23.5	36	17.0	32	24	184
	400	06	LDRXA06S-R1/4	0506818*	R1/4tap.	31	16.0	26	14.0	17	14	75
	400	06	LDRXA06S-R3/8	0506819*	R3/8tap.	33	18.0	20	12.0	17	19	81
	400	08	LDRXA08S-R1/4	0506820*	R1/4tap.	32	17.0	27	14.0	19	17	95
	400	08	LDRXA08S-R3/8	0506821*	R3/8tap.	33	18.0	28	12.0	19	19	103
	400	10	LDRXA10S-R3/8	0506822*	R3/8tap.	34	17.5	28	14.0	22	19	138
	400	10	LDRXA10S-R1/4	0506823*	R1/4tap.	34	17.5	28	14.0	22	22	95
	400	10	LDRXA10S-R1/2	0506824*	R1/2tap.	39	22.5	32	14.0	22	22	132
	400	12	LDRXA12S-R3/8	0506825*	R3/8tap.	38	21.5	28	14.0	24	22	164
	400	12	LDRXA12S-R1/2	0506826*	R1/2tap.	39	22.5	32	14.0	24	24	135
	400	14	LDRXA14S-R1/2	0506827*	R1/2tap.	40	22.0	32	14.0	27	19	158
	400	16	LDRXA16S-R1/2	0506828*	R1/2tap.	43	24.5	32	17.0	30	24	200

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbonsteel; B—Stainlesssteel; T—brass.

LDRXB

端直角接头—英制锥螺纹

Maleelbowconnectingunion—Britishstandardcone pipethread

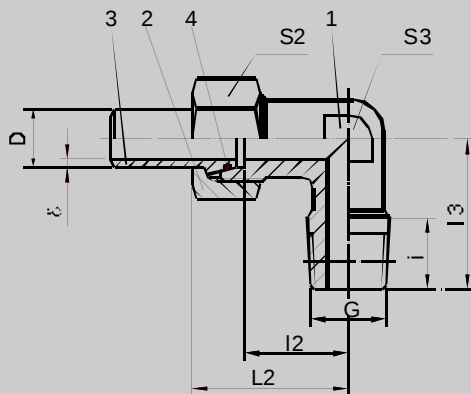

- Part1—本体Elbowbody
Part2—螺母Nut
Part3—焊接头Weldingcone
Part4—O形圈O-ring

LDRXB

订货示例：型号为LDRXB06× $\frac{1}{8}$ L-R1/8，材料为碳钢，仅供本体和螺母时，订货号为0506901G Part1+2。

Orderexample: Typeis LDRXB06× $\frac{1}{8}$ L-R1/8, materialis carbonsteel, only orderingelbowbodyandnut, thereferenceis 0506901G Part1+2.

Series 系列	PN	Tube OD 管子外径 D	Type 型号	Reference 订货号 LDRXB	G	L2	I2	I3	i	S2	S3	Weight 重量(g) LDRXB
L	315	06	LDRXB06× $\frac{1}{8}$ L-R1/8	0506901*	R1/8tap.	27	12.0	20	9.5	14	12	48
	315	06	LDRXB06× $\frac{1}{8}$ L-R1/4	0506902*	R1/4tap.	29	14.0	26	12.0	14	12	66
	315	08	LDRXB08× $\frac{1}{8}$ L-R1/4	0506903*	R1/4tap.	29	14.0	26	14.0	17	14	73
	315	08	LDRXB08× $\frac{1}{8}$ L-R1/8	0506904*	R1/8tap.	29	14.0	26	9.5	17	14	75
	315	08	LDRXB08× $\frac{1}{8}$ L-R3/8	0506905*	R3/8tap.	32	27.0	28	14.0	17	19	120
	315	10	LDRXB10× $\frac{1}{8}$ L-R1/4	0506906*	R1/4tap.	30	15.0	27	14.0	19	17	98
	315	10	LDRXB10× $\frac{1}{8}$ L-R3/8	0506907*	R3/8tap.	32	17.0	28	14.0	19	19	129
	315	12	LDRXB12× $\frac{1}{8}$ L-R3/8	0506908*	R3/8tap.	32	17.0	28	14.0	22	19	141
	315	12	LDRXB12× $\frac{1}{8}$ L-R1/4	0506909*	R1/4tap.	32	17.0	27	14.0	22	19	130
	315	12	LDRXB12× $\frac{1}{8}$ L-R1/2	0506910*	R1/2tap.	36	21.0	34	14.0	22	19	138
S	315	15	LDRXB15× $\frac{1}{8}$ L-R1/2	0506911*	R1/2tap.	36	21.0	34	14.0	27	19	170
	315	18	LDRXB18× $\frac{1}{8}$ L-R1/2	0506912*	R1/2tap.	40	23.5	36	17.0	32	24	219
	400	06	LDRXB06× $\frac{1}{8}$ S-R1/4	0506913*	R1/4tap.	31	16.0	26	14.0	17	14	82
	400	06	LDRXB06× $\frac{1}{8}$ S-R3/8	0506914*	R3/8tap.	33	18.0	20	12.0	17	19	88
	400	08	LDRXB08× $\frac{1}{8}$ S-R1/4	0506915*	R1/4tap.	32	17.0	27	14.0	19	17	104
	400	08	LDRXB08× $\frac{1}{8}$ S-R3/8	0506916*	R3/8tap.	33	18.0	28	12.0	19	19	112
	400	10	LDRXB10× $\frac{1}{8}$ S-R3/8	0506917*	R3/8tap.	34	17.5	28	14.0	22	19	154
	400	10	LDRXB10× $\frac{1}{8}$ S-R1/4	0506918*	R1/4tap.	34	17.5	28	14.0	22	22	111
	400	10	LDRXB10× $\frac{1}{8}$ S-R1/2	0506919*	R1/2tap.	39	22.5	32	14.0	22	22	148
	400	12	LDRXB12× $\frac{1}{8}$ S-R3/8	0506920*	R3/8tap.	38	21.5	28	14.0	24	22	185
	400	12	LDRXB12× $\frac{1}{8}$ S-R1/2	0506921*	R1/2tap.	39	22.5	32	14.0	24	24	156
	400	14	LDRXB14× $\frac{1}{8}$ S-R1/2	0506922*	R1/2tap.	40	22.0	32	14.0	27	19	182
	400	16	LDRXB16× $\frac{1}{8}$ S-R1/2	0506923*	R1/2tap.	43	24.5	32	17.0	30	24	241

*材料: G—碳钢; B—不锈钢。

*Material: G—Carbonsteel; B—Stainlesssteel.

上海欧际冶金机械制造有限公司

地址: 上海市宝山区富联路1188号


电话: 021-66047188 66047818 传真: 021-66047588

B69

LDNXA

端直角接头—美制锥螺纹

Maleelbowconnectingunion—Americanstandardcone pipethread

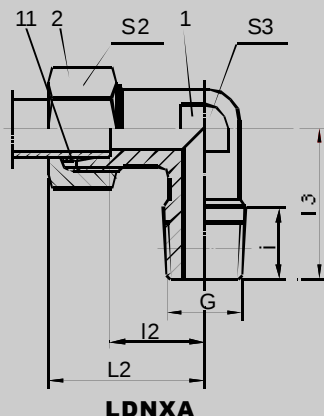

Part1—本体Elbowbody

Part2—螺母Nut

Part11—卡套Ferrule

LDNXA

订货示例：型号为LDNXA04LL-1/8，材料为碳钢，仅供本体和螺母时，订货号为0507001G Part1+2。

Orderexample:Typeis LDNXA04LL-1/8,materialiscarbonsteel,onlyorderingelbowbodyandnut,thereferenceis 0507001G Part1+2.


Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号 LDNXA	G	L2	I2	I3	i	S2	S3	Weight 重量(g) LDNXA
LL	100	04	LDNXA04LL-1/8	0507001*	1/8-27NPT	21	11.0	17	10.0	10	11	22
	100	06	LDNXA06LL-1/8	0507002*	1/8-27NPT	21	9.5	17	10.0	12	11	23
	100	08	LDNXA08LL-1/8	0507003*	1/8-27NPT	23	11.5	20	10.0	14	12	32
L	315	06	LDNXA06L-1/8	0507004*	1/8-27NPT	27	12.0	20	10.0	14	12	40
	315	06	LDNXA06L-1/4	0507005*	1/4-18NPT	29	14.0	26	15.0	14	14	56
	315	06	LDNXA06L-3/8	0507006*	3/8-18NPT	33	18.0	28	15.3	14	17	68
	315	08	LDNXA08L-1/8	0507007*	1/8-27NPT	29	14.0	26	10.0	17	14	47
	315	08	LDNXA08L-1/4	0507008*	1/4-18NPT	29	14.0	26	15.0	17	14	64
	315	10	LDNXA10L-1/4	0507009*	1/4-18NPT	30	15.0	27	15.0	19	17	82
	315	10	LDNXA10L-3/8	0507010*	3/8-18NPT	32	17.0	28	15.3	19	19	74
	315	12	LDNXA12L-1/4	0507011*	1/4-18NPT	32	17.0	28	15.0	22	19	111
	315	12	LDNXA12L-3/8	0507012*	3/8-18NPT	32	17.0	28	15.3	22	19	121
	315	12	LDNXA12L-1/2	0507013*	1/2-14NPT	36	21.0	34	20.0	22	19	119
	315	15	LDNXA15L-1/2	0507014*	1/2-14NPT	36	21.0	34	20.0	27	19	136
	315	18	LDNXA18L-1/2	0507015*	1/2-14NPT	40	23.5	36	20.0	32	24	192
	160	22	LDNXA22L-3/4	0507016*	3/4-14NPT	44	27.5	42	20.0	36	27	265
	160	28	LDNXA28L-1	0507017*	1-111/2NPT	47	30.5	48	25.0	41	36	434
	160	35	LDNXA35L-11/4	0507018*	11/4-111/2NPT	56	34.5	54	25.5	50	41	621
S	160	42	LDNXA42L-11/2	0507019*	11/2-111/2NPT	63	40.0	61	26.0	60	50	969
	630	06	LDNXA06S-1/4	0507020*	1/4-18NPT	31	16.0	26	15.0	17	14	75
	630	06	LDNXA06S-1/2	0507021*	1/2-14NPT	36	21.0	34	20.0	17	19	122
	630	08	LDNXA08S-1/4	0507022*	1/4-18NPT	32	17.0	27	15.0	19	17	96
	630	08	LDNXA08S-3/8	0507023*	3/8-18NPT	33	18.0	28	15.3	19	17	100
	630	08	LDNXA08S-1/2	0507024*	1/2-14NPT	38	23.0	34	20.0	19	19	98
	630	10	LDNXA10S-1/4	0507025*	1/4-18NPT	34	17.5	28	15.0	22	19	130
	630	10	LDNXA10S-3/8	0507026*	3/8-18NPT	34	17.5	28	15.3	22	19	132
	630	12	LDNXA12S-1/4	0507027*	1/4-18NPT	38	21.5	29	15.0	24	17	111
	630	12	LDNXA12S-3/8	0507028*	3/8-18NPT	38	22.5	28	15.3	24	22	160
	630	12	LDNXA12S-1/2	0507029*	1/2-14NPT	39	22.5	34	20.0	24	19	144
	630	14	LDNXA14S-1/2	0507030*	1/2-14NPT	40	22.0	34	20.0	27	19	160
	400	16	LDNXA16S-1/2	0507031*	1/2-14NPT	43	24.5	36	20.0	30	24	205
	400	20	LDNXA20S-3/4	0507032*	3/4-11NPT	48	26.5	42	20.0	36	27	319
	400	25	LDNXA25S-1	0507033*	1-111/2NPT	54	30.0	48	25.0	46	36	596
	400	30	LDNXA30S-11/4	0507034*	11/4-111/2NPT	62	35.5	54	25.5	50	41	835
	315	38	LDNXA38S-11/2	0507035*	11/2-111/2NPT	72	41.0	61	26.0	60	50	1250

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material:G—Carbonsteel;B—Stainlesssteel;T—brass.

LDNXB

端直角接头—美制锥螺纹

Maleelbowconnectingunion—Americanstandardcone pipethread

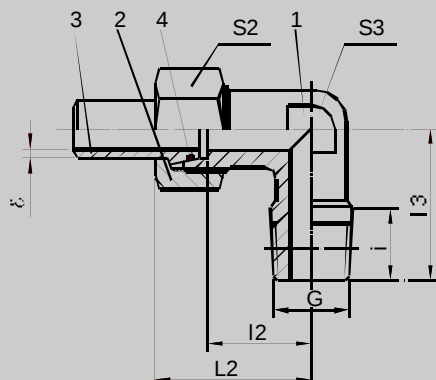

LDNXB

- Part1—本体Elbowbody
Part2—螺母Nut
Part3—焊接头Weldingcone
Part4—O形圈O-ring

订货示例：型号为LDNXB06× $\frac{1}{8}$ L-1/8，材料为碳钢，仅供本体和螺母时，订货号为0507101G Part1+2。

Orderexample: Typeis LDNXB06× $\frac{1}{8}$ L-1/8, materialiscarbonsteel, onlyorderingelbowbodyandnut, thereferenceis 0507101G Part1+2.

Series 系列	PN	Tube OD 管子外径	Type 型号	Reference 订货号 LDNXB	G	L2	I2	I3	i	S2	S3	Weight 重量(g) LDNXB
L	315	06	LDNXB06× $\frac{1}{8}$ L-1/8	0507101*	1/8-27NPT	27	12.0	20	10.0	14	12	47
	315	06	LDNXB06× $\frac{1}{8}$ L-1/4	0507102*	1/4-18NPT	29	14.0	26	15.0	14	14	63
	315	06	LDNXB06× $\frac{1}{8}$ L-3/8	0507103*	3/8-18NPT	33	18.0	28	15.3	14	17	75
	315	08	LDNXB08× $\frac{1}{8}$ L-1/8	0507104*	1/8-27NPT	29	14.0	26	10.0	17	14	56
	315	08	LDNXB08× $\frac{1}{8}$ L-1/4	0507105*	1/4-18NPT	29	14.0	26	15.0	17	14	73
	315	10	LDNXB10× $\frac{1}{8}$ L-1/4	0507106*	1/4-18NPT	30	15.0	27	15.0	19	17	98
	315	10	LDNXB10× $\frac{1}{8}$ L-3/8	0507107*	3/8-18NPT	32	17.0	28	15.3	19	19	90
	315	12	LDNXB12× $\frac{1}{8}$ L-1/4	0507108*	1/4-18NPT	32	17.0	28	15.0	22	19	132
	315	12	LDNXB12× $\frac{1}{8}$ L-3/8	0507109*	3/8-18NPT	32	17.0	28	15.3	22	19	142
	315	12	LDNXB12× $\frac{1}{8}$ L-1/2	0507110*	1/2-14NPT	36	21.0	34	20.0	22	19	140
	315	15	LDNXB15× $\frac{1}{8}$ L-1/2	0507111*	1/2-14NPT	36	21.0	34	20.0	27	19	166
	315	18	LDNXB18× $\frac{1}{8}$ L-1/2	0507112*	1/2-14NPT	40	23.5	36	20.0	32	24	227
	160	22	LDNXB22× $\frac{1}{8}$ L-3/4	0507113*	3/4-14NPT	44	27.5	42	20.0	36	27	313
	160	28	LDNXB28× $\frac{1}{8}$ L-1	0507114*	1-111/2NPT	47	30.5	48	25.0	41	36	509
	160	35	LDNXB35× $\frac{1}{8}$ L-11/4	0507115*	11/4-111/2NPT	56	34.5	54	25.5	50	41	751
S	160	42	LDNXB42× $\frac{1}{8}$ L-11/2	0507116*	11/2-111/2NPT	63	40.0	61	26.0	60	50	1144
	630	06	LDNXB06× $\frac{1}{8}$ S-1/4	0507117*	1/4-18NPT	31	16.0	26	15.0	17	14	82
	630	06	LDNXB06× $\frac{1}{8}$ S-1/2	0507118*	1/2-14NPT	36	21.0	34	20.0	17	19	129
	630	08	LDNXB08× $\frac{1}{8}$ S-1/4	0507119*	1/4-18NPT	32	17.0	27	15.0	19	17	105
	630	08	LDNXB08× $\frac{1}{8}$ S-3/8	0507120*	3/8-18NPT	33	18.0	28	15.3	19	17	109
	630	08	LDNXB08× $\frac{1}{8}$ S-1/2	0507121*	1/2-14NPT	38	23.0	34	20.0	19	19	107
	630	10	LDNXB10× $\frac{1}{8}$ S-1/4	0507122*	1/4-18NPT	34	17.5	28	15.0	22	19	146
	630	10	LDNXB10× $\frac{1}{8}$ S-3/8	0507123*	3/8-18NPT	34	17.5	28	15.3	22	19	148
	630	12	LDNXB12× $\frac{1}{8}$ S-1/4	0507124*	1/4-18NPT	38	21.5	29	15.0	24	17	132
	630	12	LDNXB12× $\frac{1}{8}$ S-3/8	0507125*	3/8-18NPT	38	22.5	28	15.3	24	22	181
	630	12	LDNXB12× $\frac{1}{8}$ S-1/2	0507126*	1/2-14NPT	39	22.5	34	20.0	24	19	165
	630	14	LDNXB14× $\frac{1}{8}$ S-1/2	0507127*	1/2-14NPT	40	22.0	34	20.0	27	19	184
	400	16	LDNXB16× $\frac{1}{8}$ S-1/2	0507128*	1/2-14NPT	43	24.5	36	20.0	30	24	246
	400	20	LDNXB20× $\frac{1}{8}$ S-3/4	0507129*	3/4-11NPT	48	26.5	42	20.0	36	27	391
	400	25	LDNXB25× $\frac{1}{8}$ S-1	0507130*	1-111/2NPT	54	30.0	48	25.0	46	36	726
	400	30	LDNXB30× $\frac{1}{8}$ S-11/4	0507131*	11/4-111/2NPT	62	35.5	54	25.5	50	41	1016
	315	38	LDNXB38× $\frac{1}{8}$ S-11/2	0507132*	11/2-111/2NPT	72	41.0	61	26.0	60	50	1550

*材料: G—碳钢; B—不锈钢。 *Material: G—Carbonsteel; B—Stainlesssteel.

上海欧际冶金机械制造有限公司

地址: 上海市宝山区富联路1188号


电话: 021-66047188 66047818 传真: 021-66047588

B71

LDGJA

端直角接头—英制螺纹

Maleelbowconnectingunion—Britishstandardthread

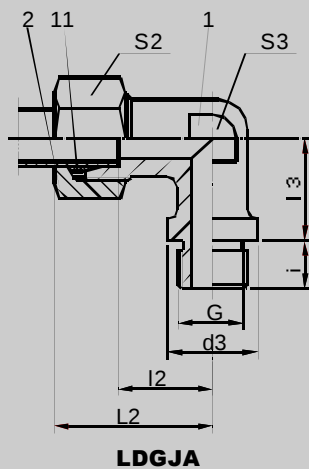

Part1—本体Elbowbody

Part2—螺母Nut

Part11—卡套Ferrule

订货示例：型号为LDGJA22L-G3/4A，材料为碳钢，仅供本体和螺母时，订货号为0507201G Part1+2。

Orderexample:Typeis LDGJA22L-G3/4A,materialiscarbonsteel,onlyorderingelbowbodyandnut,thereferenceis0507201G Part1+2.


Series 系列	PN	Tube OD 管子外径	Type 型号	Reference 订货号									Weight 重量(g)
				LDGJA	G	L2	l2	l3	i	S2	S3	d3	LDGJA
L	160	22	LDGJA22L-G3/4A	0507201*	G3/4A	44	27.5	26	16	36	27	32	257
	160	28	LDGJA28L-G1A	0507202*	G1A	47	30.5	30	18	41	36	39	403
	160	35	LDGJA35L-G11/4A	0507203*	G11/4A	56	34.5	34	20	50	41	49	621
	160	42	LDGJA42L-G11/2A	0507204*	G11/2A	63	40.0	39	22	60	50	55	945
S	400	20	LDGJA20S-G3/4A	0507205*	G3/4A	48	26.5	26	16	36	27	32	324
	250	25	LDGJA25S-G1A	0507206*	G1A	54	30.0	30	18	46	36	39	603
	160	30	LDGJA30S-G11/4A	0507207*	G11/4A	62	35.5	34	20	50	41	49	868
	160	38	LDGJA38S-G11/2A	0507208*	G11/2A	72	41.0	39	22	60	50	55	1249

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbonsteel; B—Stainlesssteel; T—brass.

LDGJB

端直角接头—英制螺纹

Maleelbowconnectingunion—Britishstandardthread

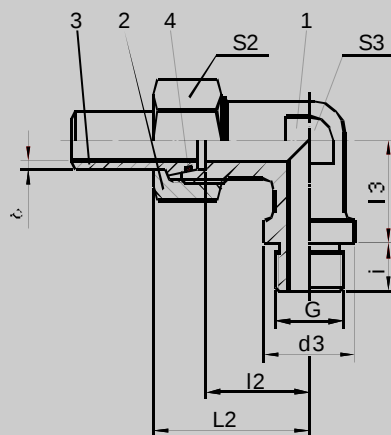

- Part1—本体Elbowbody
- Part2—螺母Nut
- Part3—焊接头Weldingcone
- Part4—O形圈O-ring

LDGJB

订货示例：型号为LDGJB22× $\frac{1}{4}$ L-G3/4A，材料为碳钢，仅供本体和螺母时，订货号为0507301G Part1+2。
Orderexample:Typeis LDGJB22× $\frac{1}{4}$ L-G3/4A,materialiscarbonsteel,onlyorderingelbowbodyandnut,thereferenceis0507301G Part1+2.


Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号									Weight 重量(g)
				LDGJB	G	L2	I2	I3	i	S2	S3	d3	LDGJB
L	160	22	LDGJB22× $\frac{1}{4}$ L-G3/4A	0507301*	G3/4A	44	27.5	26	16	36	27	32	305
	160	28	LDGJB28× $\frac{1}{4}$ L-G1A	0507302*	G1A	47	30.5	30	18	41	36	39	478
	160	35	LDGJB35× $\frac{1}{4}$ L-G11/4A	0507303*	G11/4A	56	34.5	34	20	50	41	49	751
	160	42	LDGJB42× $\frac{1}{4}$ L-G11/2A	0507304*	G11/2A	63	40.0	39	22	60	50	55	1120
S	400	20	LDGJB20× $\frac{1}{4}$ S-G3/4A	0507305*	G3/4A	48	26.5	26	16	36	27	32	396
	250	25	LDGJB25× $\frac{1}{4}$ S-G1A	0507306*	G1A	54	30.0	30	18	46	36	39	733
	160	30	LDGJB30× $\frac{1}{4}$ S-G11/4A	0507307*	G11/4A	62	35.5	34	20	50	41	49	1049
	160	38	LDGJB38× $\frac{1}{4}$ S-G11/2A	0507308*	G11/2A	72	41.0	39	22	60	50	55	1549

*材料: G—碳钢; B—不锈钢。 *Material:G—Carbonsteel;B—Stainlesssteel.

LKMOA

端直角可调向接头—公制螺纹

Maleelbowadjustableunion—Metricthread

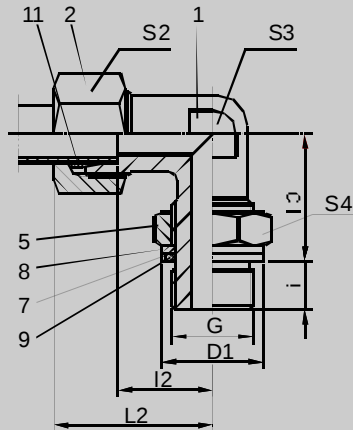

- Part1—本体Elbowbody
Part2—螺母Nut
Part5—调向螺母Nut
Part7—金属圈Metalring
Part8—金属垫Metalseal
Part9—O形圈O-ring
Part11—卡套Ferrule

LKMOA

订货示例：型号为LKMOA06L，材料为碳钢，仅供本体和螺母时，订货号为0607401G Part1+2。

Orderexample:Typeis LKMOA06L,materialiscarbonsteel,onlyorderingelbowbodyandnut,thereferenceis0607401G Part1+2.


Series 系列	PN	Tube OD 管子外径	Type 型号	Reference 订货号 LKMOA	G	L2	I2	I3	i	D1	S2	S3	S4	Weight 重量(g) LKMOA
L	315	06	LKMOA06L	0607401*	M10×1	29	14	20	7	15	14	14	14	66
	315	08	LKMOA08L	0607402*	M12×1.5	31	16	22	10	18	17	14	17	66
	315	10	LKMOA10L	0607403*	M14×1.5	32	17	24	10	20	19	19	19	87
	315	12	LKMOA12L	0607404*	M16×1.5	34	19	25	10	23	22	19	22	95
	315	15	LKMOA15L	0607405*	M18×1.5	36	21	31	11	25	27	22	24	224
	250	18	LKMOA18L	0607406*	M22×1.5	40	24	33	12	28	32	27	27	284
	160	22	LKMOA22L	0607407*	M27×2	44	28	36	14	33	36	30	32	534
	160	28	LKMOA28L	0607408*	M33×2	47	31	39	14	41	41	36	41	609
	160	35	LKMOA35L	0607409*	M42×2	59	38	49	14	51	50	50	50	844
	160	42	LKMOA42L	0607410*	M48×2	61	38	50	16	56	60	50	55	928
S	315	06	LKMOA06S	0607411*	M12×1.5	30	15	22	10	18	17	14	17	72
	315	08	LKMOA08S	0607412*	M14×1.5	32	17	26	10	20	19	19	19	88
	315	10	LKMOA10S	0607413*	M16×1.5	34	18	27	11	23	22	19	22	97
	315	12	LKMOA12S	0607414*	M18×1.5	38	22	31	12	25	24	22	24	227
	250	16	LKMOA16S	0607415*	M22×1.5	43	25	36	14	28	30	27	27	286
	250	20	LKMOA20S	0607416*	M27×2	49	28	39	16	33	36	30	32	553
	160	25	LKMOA25S	0607417*	M33×2	54	30	44	16	41	46	36	41	722
	160	30	LKMOA30S	0607418*	M42×2	62	36	51	17	51	50	50	50	932
	160	38	LKMOA38S	0607419*	M48×2	65	34	54	19	56	60	50	55	1042

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbonsteel; B—Stainlesssteel; T—brass.

LKMOB

端直角可调向接头—公制螺纹

Maleelbowadjustableunion—Metricthread

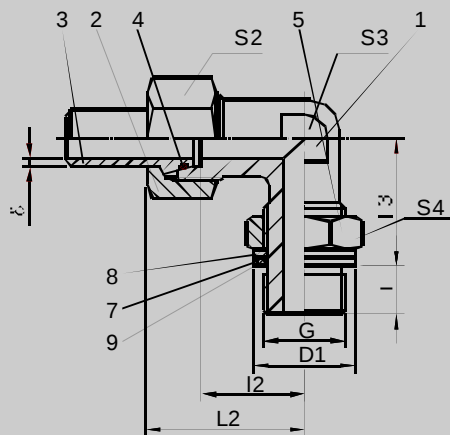

LKMOB

- Part1—本体Elbowbody
- Part2—螺母Nut
- Part3—焊接头Weldingcone
- Part4—O形圈O-ring
- Part5—调向螺母Nut
- Part7—金属圈Metalring
- Part8—金属垫Metalseal
- Part9—O形圈O-ring

订货示例：型号为LKMOB06× $\frac{1}{2}$ L，材料为碳钢，仅供本体和螺母时，订货号为0607501G Part1+2。

Orderexample: Typeis LKMOB06× $\frac{1}{2}$ L, materialiscarbonsteel, onlyorderingelbowbodyandnut, thereferenceis0607501G Part1+2.


Series 系列	PN	TubeOD 管子外径	Type 型号	Reference 订货号										Weight 重量(g)
				LKMOB	G	L2	I2	I3	i	D1	S2	S3	S4	LKMOB
L	315	06	LKMOB06× $\frac{1}{2}$ L	0607501*	M10×1	29	14	20	7	15	14	14	14	73
	315	08	LKMOB08× $\frac{1}{2}$ L	0607502*	M12×1.5	31	16	22	10	18	17	14	17	75
	315	10	LKMOB10× $\frac{1}{2}$ L	0607503*	M14×1.5	32	17	24	10	20	19	19	19	103
	315	12	LKMOB12× $\frac{1}{2}$ L	0607504*	M16×1.5	34	19	25	10	23	22	19	22	116
	315	15	LKMOB15× $\frac{1}{2}$ L	0607505*	M18×1.5	36	21	31	11	25	27	22	24	254
	250	18	LKMOB18× $\frac{1}{2}$ L	0607506*	M22×1.5	40	24	33	12	28	32	27	27	319
	160	22	LKMOB22× $\frac{1}{2}$ L	0607507*	M27×2	44	28	36	14	33	36	30	32	582
	160	28	LKMOB28× $\frac{1}{2}$ L	0607508*	M33×2	47	31	39	14	41	41	36	41	684
	160	35	LKMOB35× $\frac{1}{2}$ L	0607509*	M42×2	59	38	49	14	51	50	50	50	974
	160	42	LKMOB42× $\frac{1}{2}$ L	0607510*	M48×2	61	38	50	16	56	60	50	55	1103
S	315	06	LKMOB06× $\frac{1}{2}$ S	0607511*	M12×1.5	30	15	22	10	18	17	14	17	79
	315	08	LKMOB08× $\frac{1}{2}$ S	0607512*	M14×1.5	32	17	26	10	20	19	19	19	97
	315	10	LKMOB10× $\frac{1}{2}$ S	0607513*	M16×1.5	34	18	27	11	23	22	19	22	113
	315	12	LKMOB12× $\frac{1}{2}$ S	0607514*	M18×1.5	38	22	31	12	25	24	22	24	248
	250	16	LKMOB16× $\frac{1}{2}$ S	0607515*	M22×1.5	43	25	36	14	28	30	27	27	327
	250	20	LKMOB20× $\frac{1}{2}$ S	0607516*	M27×2	49	28	39	16	33	36	30	32	625
	160	25	LKMOB25× $\frac{1}{2}$ S	0607517*	M33×2	54	30	44	16	41	46	36	41	852
	160	30	LKMOB30× $\frac{1}{2}$ S	0607518*	M42×2	62	36	51	17	51	50	50	50	1113
	160	38	LKMOB38× $\frac{1}{2}$ S	0607519*	M48×2	65	34	54	19	56	60	50	55	1342

*材料: G—碳钢; B—不锈钢。 *Material: G—Carbonsteel; B—Stainlesssteel.

TKMOA

端三通可调向接头—公制螺纹

Male branch tee adjustable union—Metric thread

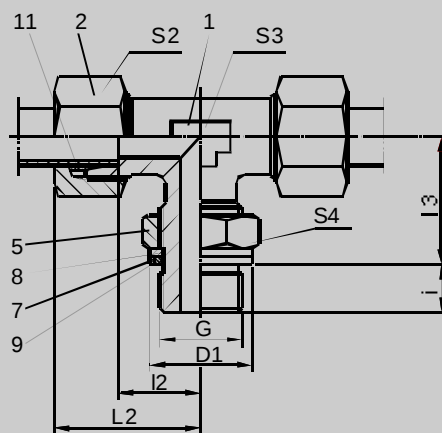

TKMOA

- Part1—本体 Teebody
- Part2—螺母 Nut
- Part5—调向螺母 Nut
- Part7—金属圈 Metal ring
- Part8—金属垫 Metal seal
- Part9—O形圈 O-ring
- Part11—卡套 Ferrule

订货示例：型号为TKMOA06L，材料为碳钢，仅供本体和螺母时，订货号为0607601G Part1+2。
Order example: Type is TKMOA06L, material is carbon steel, only ordering tee body and nut, the reference is 0607601G Part1+2.


Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号 TKMOA	G	L2	I2	I3	i	D1	S2	S3	S4	Weight 重量(g) TKMOA
L	315	06	TKMOA06L	0607601*	M10×1	29	14	20	7	15	14	14	14	93
	315	08	TKMOA08L	0607602*	M12×1.5	31	16	22	10	18	17	14	17	103
	315	10	TKMOA10L	0607603*	M14×1.5	32	17	25	9	20	19	19	19	175
	315	12	TKMOA12L	0607604*	M16×1.5	34	19	26	9	23	22	19	22	191
	315	15	TKMOA15L	0607605*	M18×1.5	36	21	30	11	25	27	22	24	331
	250	18	TKMOA18L	0607606*	M22×1.5	40	24	33	11	28	32	27	27	423
	160	22	TKMOA22L	0607607*	M27×2	44	28	35	14	33	36	30	32	737
	160	28	TKMOA28L	0607608*	M33×2	47	31	38	14	41	41	36	41	777
	160	35	TKMOA35L	0607609*	M42×2	59	38	48	14	51	50	50	50	1260
	160	42	TKMOA42L	0607610*	M48×2	61	38	49	16	56	60	50	55	1428
S	315	06	TKMOA06S	0607611*	M12×1.5	30	15	22	10	18	17	14	17	106
	315	08	TKMOA08S	0607612*	M14×1.5	32	17	26	10	20	19	19	19	177
	315	10	TKMOA10S	0607613*	M16×1.5	34	18	27	11	23	22	19	22	195
	315	12	TKMOA12S	0607614*	M18×1.5	38	22	31	12	25	24	22	24	313
	250	16	TKMOA16S	0607615*	M22×1.5	43	25	35	14	28	30	27	27	427
	250	20	TKMOA20S	0607616*	M27×2	49	28	39	16	33	36	30	32	775
	160	25	TKMOA25S	0607617*	M33×2	54	30	44	16	41	46	36	41	1007
	160	30	TKMOA30S	0607618*	M42×2	62	36	51	17	51	50	50	50	1436
	160	38	TKMOA38S	0607619*	M48×2	65	34	54	19	56	60	50	55	1656

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.

TKMOB

端三通可调向接头—公制螺纹

Male branch tee adjustable union—Metric thread

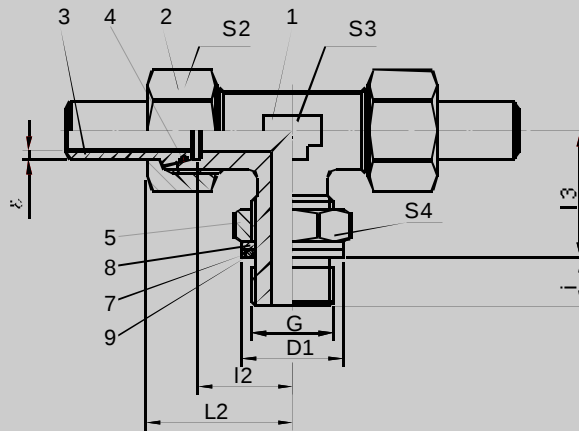

- Part1—本体 Tee body
- Part2—螺母 Nut
- Part3—焊接头 Welding cone
- Part4—O形圈 O-ring
- Part5—调向螺母 Nut
- Part7—金属圈 Metal ring
- Part8—金属垫 Metal seal
- Part9—O形圈 O-ring

TKMOB

订货示例：型号为TKMOB06× $\frac{1}{2}$ L，材料为碳钢，仅供本体和螺母时，订货号为0607701G Part1+2。

Order example: Type is TKMOB06× $\frac{1}{2}$ L, material is carbon steel, only ordering tee body and nut, the reference is 0607701G Part1+2.


Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号										Weight 重量(g)
				TKMOB	G	L2	I2	I3	i	D1	S2	S3	S4	TKMOB
L	315	06	TKMOB06× $\frac{1}{2}$ L	0607701*	M10×1	29	14	20	7	15	14	14	14	100
	315	08	TKMOB08× $\frac{1}{2}$ L	0607702*	M12×1.5	31	16	22	10	18	17	14	17	112
	315	10	TKMOB10× $\frac{1}{2}$ L	0607703*	M14×1.5	32	17	25	9	20	19	19	19	191
	315	12	TKMOB12× $\frac{1}{2}$ L	0607704*	M16×1.5	34	19	26	9	23	22	19	22	212
	315	15	TKMOB15× $\frac{1}{2}$ L	0607705*	M18×1.5	36	21	30	11	25	27	22	24	361
	250	18	TKMOB18× $\frac{1}{2}$ L	0607706*	M22×1.5	40	24	33	11	28	32	27	27	458
	160	22	TKMOB22× $\frac{1}{2}$ L	0607707*	M27×2	44	28	35	14	33	36	30	32	785
	160	28	TKMOB28× $\frac{1}{2}$ L	0607708*	M33×2	47	31	38	14	41	41	36	41	852
	160	35	TKMOB35× $\frac{1}{2}$ L	0607709*	M42×2	59	38	48	14	51	50	50	50	1390
	160	42	TKMOB42× $\frac{1}{2}$ L	0607710*	M48×2	61	38	49	16	56	60	50	55	1603
S	315	06	TKMOB06× $\frac{1}{2}$ S	0607711*	M12×1.5	30	15	22	10	18	17	14	17	113
	315	08	TKMOB08× $\frac{1}{2}$ S	0607712*	M14×1.5	32	17	26	10	20	19	19	19	186
	315	10	TKMOB10× $\frac{1}{2}$ S	0607713*	M16×1.5	34	18	27	11	23	22	19	22	211
	315	12	TKMOB12× $\frac{1}{2}$ S	0607714*	M18×1.5	38	22	31	12	25	24	22	24	334
	250	16	TKMOB16× $\frac{1}{2}$ S	0607715*	M22×1.5	43	25	35	14	28	30	27	27	468
	250	20	TKMOB20× $\frac{1}{2}$ S	0607716*	M27×2	49	28	39	16	33	36	30	32	847
	160	25	TKMOB25× $\frac{1}{2}$ S	0607717*	M33×2	54	30	44	16	41	46	36	41	1137
	160	30	TKMOB30× $\frac{1}{2}$ S	0607718*	M42×2	62	36	51	17	51	50	50	50	1617
	160	38	TKMOB38× $\frac{1}{2}$ S	0607719*	M48×2	65	34	54	19	56	60	50	55	1956

*材料: G—碳钢; B—不锈钢。 *Material: G—Carbon steel; B—Stainless steel.

FKMOA

直路端三通可调向接头—公制螺纹

Malerunteeadjustableunion—Metricthread

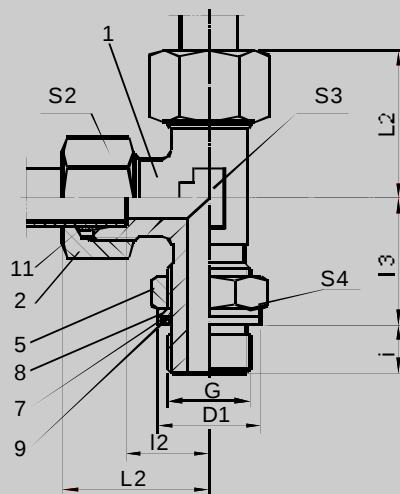

FKMOA

- Part1—本体Teebody
- Part2—螺母Nut
- Part5—调向螺母Nut
- Part7—金属圈Metalring
- Part8—金属垫Metalseal
- Part9—O形圈O-ring
- Part11—卡套Ferrule

订货示例：型号为FKMOA06L，材料为碳钢，仅供本体和螺母时，订货号为0607801G Part1+2。
Orderexample: Typeis FKMOA06L, materialiscarbonsteel, onlyorderingteebodyandnut, thereferenceis0607801G Part1+2.


Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号 FKMOA	G	L2	I2	I3	i	D1	S2	S3	S4	Weight 重量(g) FKMOA
L	315	06	FKMOA06L	0607801*	M10×1	29	14	8	7	15	14	14	14	93
	315	08	FKMOA08L	0607802*	M12×1.5	31	16	8	10	18	17	14	17	103
	315	10	FKMOA10L	0607803*	M14×1.5	32	17	11	9	20	19	19	19	175
	315	12	FKMOA12L	0607804*	M16×1.5	34	19	14	9	23	22	19	22	191
	315	15	FKMOA15L	0607805*	M18×1.5	36	21	14	11	25	27	22	24	331
	250	18	FKMOA18L	0607806*	M22×1.5	40	24	17	11	28	32	27	27	423
	160	22	FKMOA22L	0607807*	M27×2	44	28	19	14	33	36	30	32	737
	160	28	FKMOA28L	0607808*	M33×2	47	31	27	14	41	41	36	41	777
	160	35	FKMOA35L	0607809*	M42×2	59	38	37	14	51	50	50	50	1260
	160	42	FKMOA42L	0607810*	M48×2	61	38	40	16	56	60	50	55	1428
S	315	06	FKMOA06S	0607811*	M12×1.5	30	15	8	10	18	17	14	17	106
	315	08	FKMOA08S	0607812*	M14×1.5	32	17	10	10	20	19	19	19	177
	315	10	FKMOA10S	0607813*	M16×1.5	34	18	12	11	23	22	19	22	195
	315	12	FKMOA12S	0607814*	M18×1.5	38	22	13	12	25	24	22	24	313
	250	16	FKMOA16S	0607815*	M22×1.5	43	25	14	14	28	30	27	27	427
	250	20	FKMOA20S	0607816*	M27×2	49	28	17	16	33	36	30	32	775
	160	25	FKMOA25S	0607817*	M33×2	54	30	25	16	41	46	36	41	1007
	160	30	FKMOA30S	0607818*	M42×2	62	36	34	17	51	50	50	50	1436
	160	38	FKMOA38S	0607819*	M48×2	65	34	37	19	56	60	50	55	1656

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbonsteel; B—Stainlesssteel; T—brass.

FKMOB

直路端三通可调向接头—公制螺纹

Malerunteeadjustableunion—Metricthread

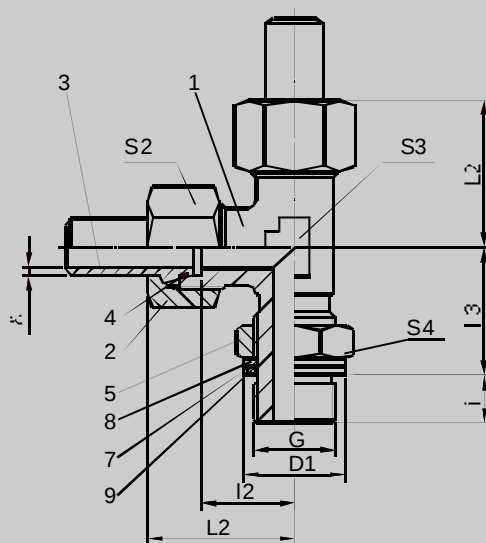

- Part1—本体Teebody
- Part2—螺母Nut
- Part3—焊接头Weldingcone
- Part4—O形圈O-ring
- Part5—调向螺母Nut
- Part7—金属圈Metalring
- Part8—金属垫Metalseal
- Part9—O形圈O-ring

FKMOB

订货示例：型号为FKMOB06× $\frac{1}{2}$ L，材料为碳钢，仅供本体和螺母时，订货号为0607901G Part1+2。

Orderexample:Typeis FKMOB06× $\frac{1}{2}$ L,materialiscarbonsteel,onlyorderingteebodyandnut,thereferenceis0607901G Part1+2.

Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号 FKMOB	G	L2	I2	I3	i	D1	S2	S3	S4	Weight 重量(g) FKMOB
L	315	06	FKMOB06× $\frac{1}{2}$ L	0607901*	M10×1	29	14	8	7	15	14	14	14	100
	315	08	FKMOB08× $\frac{1}{2}$ L	0607902*	M12×1.5	31	16	8	10	18	17	14	17	112
	315	10	FKMOB10× $\frac{1}{2}$ L	0607903*	M14×1.5	32	17	11	9	20	19	19	19	191
	315	12	FKMOB12× $\frac{1}{2}$ L	0607904*	M16×1.5	34	19	14	9	23	22	19	22	212
	315	15	FKMOB15× $\frac{1}{2}$ L	0607905*	M18×1.5	36	21	14	11	25	27	22	24	361
	250	18	FKMOB18× $\frac{1}{2}$ L	0607906*	M22×1.5	40	24	17	11	28	32	27	27	458
	160	22	FKMOB22× $\frac{1}{2}$ L	0607907*	M27×2	44	28	19	14	33	36	30	32	785
	160	28	FKMOB28× $\frac{1}{2}$ L	0607908*	M33×2	47	31	27	14	41	41	36	41	852
	160	35	FKMOB35× $\frac{1}{2}$ L	6007909*	M42×2	59	38	37	14	51	50	50	50	1390
	160	42	FKMOB42× $\frac{1}{2}$ L	0607910*	M48×2	61	38	40	16	56	60	50	55	1603
S	315	06	FKMOB06× $\frac{1}{2}$ S	0607911*	M12×1.5	30	15	8	10	18	17	14	17	113
	315	08	FKMOB08× $\frac{1}{2}$ S	0607912*	M14×1.5	32	17	10	10	20	19	19	19	186
	315	10	FKMOB10× $\frac{1}{2}$ S	0607913*	M16×1.5	34	18	12	11	23	22	19	22	211
	315	12	FKMOB12× $\frac{1}{2}$ S	0607914*	M18×1.5	38	22	13	12	25	24	22	24	334
	250	16	FKMOB16× $\frac{1}{2}$ S	0607915*	M22×1.5	43	25	14	14	28	30	27	27	468
	250	20	FKMOB20× $\frac{1}{2}$ S	0607916*	M27×2	49	28	17	16	33	36	30	32	847
	160	25	FKMOB25× $\frac{1}{2}$ S	0607917*	M33×2	54	30	25	16	41	46	36	41	1137
	160	30	FKMOB30× $\frac{1}{2}$ S	0607918*	M42×2	62	36	34	17	51	50	50	50	1617
	160	38	FKMOB38× $\frac{1}{2}$ S	0607919*	M48×2	65	34	37	19	56	60	50	55	1956

*材料：G—碳钢；B—不锈钢。 *Material:G—Carbonsteel;B—Stainlesssteel.

上海欧际冶金机械制造有限公司

地址：上海市宝山区富联路1188号


电话：021-66047188 66047818 传真：021-66047588

B79

L45KMOA

端45° 可调向接头—公制螺纹

Male 45° elbow adjustable union—Metric thread

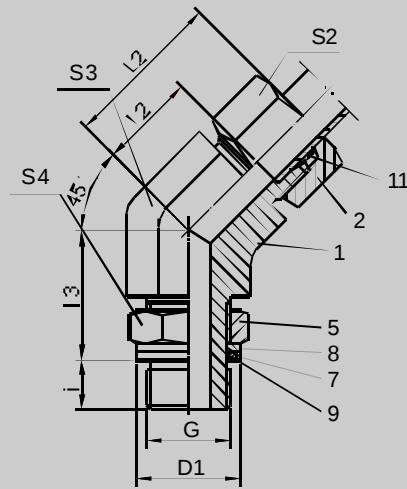

L45KMOA

- Part1—本体Elbowbody
- Part2—螺母Nut
- Part5—调向螺母Nut
- Part7—金属圈Metalring
- Part8—金属垫Metalseal
- Part9—O形圈O-ring
- Part11—卡套Ferrule

订货示例：型号为L45KMOA06L，材料为碳钢，仅供本体和螺母时，订货号为0608001G Part1+2。

Order example: Type is L45KMOA06L, material is carbon steel, only ordering elbow body and nut, the reference is 0608001G Part1+2.


Series 系列	PN	Tube OD 管子外径	Type 型号	Reference 订货号 L45KMOA	G	L2	I2	I3	i	D1	S2	S3	S4	Weight 重量(g) L45KMOA
L	315	06	L45KMOA06L	0608001*	M10×1	24	9	21	7	15	14	14	14	57
	315	08	L45KMOA08L	0608002*	M12×1.5	27	12	19	10	18	17	14	17	62
	315	10	L45KMOA10L	0608003*	M14×1.5	27	12	24	9	20	19	19	19	104
	315	12	L45KMOA12L	0608004*	M16×1.5	28	14	25	9	23	22	19	22	140
	315	15	L45KMOA15L	0608005*	M18×1.5	32	17	24	11	25	27	22	24	198
	250	18	L45KMOA18L	0608006*	M22×1.5	33	17	31	11	28	32	27	27	260
	160	22	L45KMOA22L	0608007*	M27×2	35	19	31	14	33	36	30	32	382
	160	28	L45KMOA28L	0608008*	M33×2	40	23	35	14	41	41	36	41	406
	160	35	L45KMOA35L	0608009*	M42×2	48	27	37	14	51	50	50	50	729
	160	42	L45KMOA42L	0608010*	M48×2	49	26	37	16	56	60	50	55	813
S	315	06	L45KMOA06S	0608011*	M12×1.5	24	9	19	10	18	17	14	17	64
	315	08	L45KMOA08S	0608012*	M14×1.5	27	12	19	10	20	19	19	19	105
	315	10	L45KMOA10S	0608013*	M16×1.5	29	13	23	11	23	22	19	22	114
	315	12	L45KMOA12S	0608014*	M18×1.5	33	17	25	12	25	24	19	24	149
	250	16	L45KMOA16S	0608015*	M22×1.5	34	16	30	14	28	30	19	27	222
	250	20	L45KMOA20S	0608016*	M27×2	38	16	35	16	33	36	27	32	401
	160	25	L45KMOA25S	0608017*	M33×2	43	19	37	16	41	46	36	41	521
	160	30	L45KMOA30S	0608018*	M42×2	50	24	37	17	51	50	50	50	817
	160	38	L45KMOA38S	0608019*	M48×2	52	21	38	19	56	60	50	55	927

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.

L45KMOB

端45° 可调向接头—公制螺纹

Male 45° elbow adjustable union—Metric thread

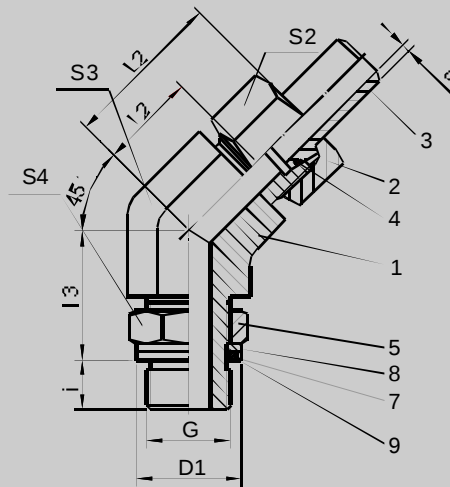

L45KMOB

- Part1—本体Elbowbody
- Part2—螺母Nut
- Part3—焊接头Weldingcone
- Part4—O形圈O-ring
- Part5—调向螺母Nut
- Part7—金属圈Metallring
- Part8—金属垫Metalseal
- Part9—O形圈O-ring

订货示例：型号为L45KMOB06× $\frac{1}{2}$ L，材料为碳钢，仅供本体和螺母时，订货号为0608101G Part1+2。

Order example: Type is L45KMOB06× $\frac{1}{2}$ L, material is carbon steel, only ordering elbow body and nut, the reference is 0608101G Part1+2.


Series 系列	PN	Tube OD 管子外径	Type 型号	Reference 订货号										Weight 重量(g)	
				L45KMOB	G	L2	I2	I3	i	D1	S2	S3	S4	L45KMOB	
L	315	06	L45KMOB06× $\frac{1}{2}$ L	0608101*	M10×1	24	9	21	7	15	14	14	14	64	
	315	08	L45KMOB08× $\frac{1}{2}$ L	0608102*	M12×1.5	27	12	19	10	18	17	14	17	71	
	315	10	L45KMOB10× $\frac{1}{2}$ L	0608103*	M14×1.5	27	12	24	9	20	19	19	19	120	
	315	12	L45KMOB12× $\frac{1}{2}$ L	0608104*	M16×1.5	28	14	25	9	23	22	19	22	161	
	315	15	L45KMOB15× $\frac{1}{2}$ L	0608105*	M18×1.5	32	17	24	11	25	27	22	24	228	
	250	18	L45KMOB18× $\frac{1}{2}$ L	0608106*	M22×1.5	33	17	31	11	28	32	27	27	295	
	160	22	L45KMOB22× $\frac{1}{2}$ L	0608107*	M27×2	35	19	31	14	33	36	30	32	430	
	160	28	L45KMOB28× $\frac{1}{2}$ L	0608108*	M33×2	40	23	35	14	41	41	36	41	481	
	160	35	L45KMOB35× $\frac{1}{2}$ L	0608109*	M42×2	48	27	37	14	51	50	50	50	859	
	160	42	L45KMOB42× $\frac{1}{2}$ L	0608110*	M48×2	49	26	37	16	56	60	50	55	988	
S	315	06	L45KMOB06× $\frac{1}{2}$ S	0608111*	M12×1.5	24	9	19	10	18	17	14	17	71	
	315	08	L45KMOB08× $\frac{1}{2}$ S	0608112*	M14×1.5	27	12	19	10	20	19	19	19	114	
	315	10	L45KMOB10× $\frac{1}{2}$ S	0608113*	M16×1.5	29	13	23	11	23	22	19	22	130	
	315	12	L45KMOB12× $\frac{1}{2}$ S	0608114*	M18×1.5	33	17	25	12	25	24	19	24	170	
	250	16	L45KMOB16× $\frac{1}{2}$ S	0608115*	M22×1.5	34	16	30	14	28	30	19	27	263	
	250	20	L45KMOB20× $\frac{1}{2}$ S	0608116*	M27×2	38	16	35	16	33	36	27	32	473	
	160	25	L45KMOB25× $\frac{1}{2}$ S	0608117*	M33×2	43	19	37	16	41	46	36	41	651	
	160	30	L45KMOB30× $\frac{1}{2}$ S	0608118*	M42×2	50	24	37	17	51	50	50	50	998	
	160	38	L45KMOB38× $\frac{1}{2}$ S	0608119*	M48×2	52	21	38	19	56	60	50	55	1227	

*材料: G—碳钢; B—不锈钢。 *Material: G—Carbon steel; B—Stainless steel.

LKMQA

端直角可调向接头—公制螺纹O型圈密封

Maleelbowadjustableunion—MetricthreadwithO-ringseal

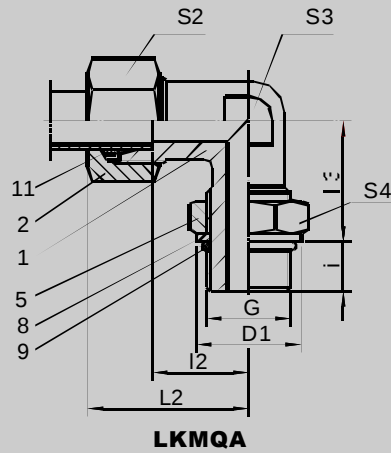

- Part1—本体Elbowbody
- Part2—螺母Nut
- Part5—调向螺母Nut
- Part8—金属垫Metalseal
- Part9—O形圈O-ring
- Part11—卡套Ferrule

订货示例：型号为LKMQA04LL，材料为碳钢，仅供本体和螺母时，订货号为0608201G Part1+2。
Orderexample:Typeis LKMQA04LL,materialiscarbonsteel,onlyorderingelbowbodyandnut,thereferenceis0608201G Part1+2.


Series 系列	PN	Tube OD 管子外径	Type 型号	Reference 订货号 LKMQA	G	L2	I2	I3	i	D1	S2	S3	S4	Weight 重量(g) LKMQA
LL	250	04	LKMQA04LL	0608201*	M8×1	21	11.3	18	8.5	12.5	10	11	12	66
	250	04	LKMQA04LL	0608202*	M10×1	21	11.3	18	8.5	14.5	10	11	14	66
	250	06	LKMQA06LL	0608203*	M10×1	22	9.8	18	8.5	14.5	12	11	14	66
	250	06	LKMQA06LL	0608204*	M12×1.5	25	12.8	21	11	17.5	12	14	17	66
L	315	06	LKMQA06L	0608205*	M10×1	29	14	20	7	15	14	14	14	66
	315	08	LKMQA08L	0608206*	M12×1.5	31	16	22	10	18	17	14	17	66
	315	10	LKMQA10L	0608207*	M14×1.5	32	17	25	10	20	19	19	19	87
	315	12	LKMQA12L	0608208*	M16×1.5	34	19	26	10	23	22	19	22	95
	315	15	LKMQA15L	0608209*	M18×1.5	36	21	30	11	25	27	22	24	224
	250	18	LKMQA18L	0608210*	M22×1.5	40	24	33	12	28	32	27	27	284
	160	22	LKMQA22L	0608211*	M27×2	44	28	35	14	33	36	30	32	534
	160	28	LKMQA28L	0608212*	M33×2	47	31	38	14	41	41	36	41	607
	160	35	LKMQA35L	0608213*	M42×2	59	38	48	14	51	50	50	50	844
	160	42	LKMQA42L	0608214*	M48×2	61	38	49	16	56	60	50	55	928
S	315	06	LKMQA06S	0608215*	M12×1.5	30	15	22	10	18	17	14	17	72
	315	08	LKMQA08S	0608216*	M14×1.5	32	17	26	10	20	19	19	19	88
	315	10	LKMQA10S	0608217*	M16×1.5	34	18	27	11	23	22	19	22	97
	315	12	LKMQA12S	0608218*	M18×1.5	38	22	31	12	25	24	22	24	227
	250	16	LKMQA16S	0608219*	M22×1.5	43	25	35	14	28	30	27	27	286
	250	20	LKMQA20S	0608220*	M27×2	49	28	39	16	33	36	30	32	553
	160	25	LKMQA25S	0608221*	M33×2	54	30	44	16	41	46	36	41	722
	160	30	LKMQA30S	0608222*	M42×2	62	36	51	17	51	50	50	50	932
	160	38	LKMQA38S	0608223*	M48×2	65	34	54	19	56	60	50	55	1042

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbonsteel; B—Stainlesssteel; T—brass.

LKMQB

端直角可调向接头—公制螺纹O型圈密封

Maleelbowadjustableunion—MetricthreadwithO-ringseal

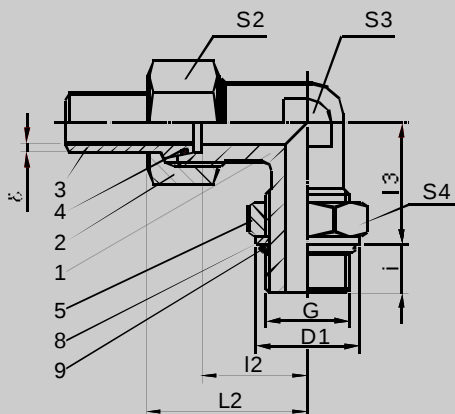

LKMQB

- Part1—本体Elbowbody
- Part2—螺母Nut
- Part3—焊接头Weldingcone
- Part4—O形圈O-ring
- Part5—调向螺母Nut
- Part8—金属垫Metalseal
- Part9—O形圈O-ring

订货示例：型号为LKMQB06× $\frac{1}{2}$ L，材料为碳钢，仅供本体和螺母时，订货号为0608301G Part1+2。

Orderexample:Typeis LKMQB06× $\frac{1}{2}$ L,materialiscarbonsteel,onlyorderingelbowbodyandnut,thereferenceis0608301G Part1+2.


Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号 LKMQB	G	L2	I2	I3	i	D1	S2	S3	S4	Weight 重量(g) LKMQB
L	315	06	LKMQB06× $\frac{1}{2}$ L	0608301*	M10×1	29	14	20	7	15	14	14	14	73
	315	08	LKMQB08× $\frac{1}{2}$ L	0608302*	M12×1.5	31	16	22	10	18	17	14	17	75
	315	10	LKMQB10× $\frac{1}{2}$ L	0608303*	M14×1.5	32	17	25	10	20	19	19	19	103
	315	12	LKMQB12× $\frac{1}{2}$ L	0608304*	M16×1.5	34	19	26	10	23	22	19	22	116
	315	15	LKMQB15× $\frac{1}{2}$ L	0608305*	M18×1.5	36	21	30	11	25	27	22	24	254
	250	18	LKMQB18× $\frac{1}{2}$ L	0608306*	M22×1.5	40	24	33	12	28	32	27	27	319
	160	22	LKMQB22× $\frac{1}{2}$ L	0608307*	M27×2	44	28	35	14	33	36	30	32	582
	160	28	LKMQB28× $\frac{1}{2}$ L	0608308*	M33×2	47	31	38	14	41	41	36	41	682
	160	35	LKMQB35× $\frac{1}{2}$ L	0608309*	M42×2	59	38	48	14	51	50	50	50	774
	160	42	LKMQB42× $\frac{1}{2}$ L	0608310*	M48×2	61	38	49	16	56	60	50	55	1103
S	315	06	LKMQB06× $\frac{1}{2}$ S	0608311*	M12×1.5	30	15	22	10	18	17	14	17	79
	315	08	LKMQB08× $\frac{1}{2}$ S	0608312*	M14×1.5	32	17	26	10	20	19	19	19	97
	315	10	LKMQB10× $\frac{1}{2}$ S	0608313*	M16×1.5	34	18	27	11	23	22	19	22	113
	315	12	LKMQB12× $\frac{1}{2}$ S	0608314*	M18×1.5	38	22	31	12	25	24	22	24	248
	250	16	LKMQB16× $\frac{1}{2}$ S	0608315*	M22×1.5	43	25	35	14	28	30	27	27	327
	250	20	LKMQB20× $\frac{1}{2}$ S	0608316*	M27×2	49	28	39	16	33	36	30	32	625
	160	25	LKMQB25× $\frac{1}{2}$ S	0608317*	M33×2	54	30	44	16	41	46	36	41	852
	160	30	LKMQB30× $\frac{1}{2}$ S	0608318*	M42×2	62	36	51	17	51	50	50	50	1113
	160	38	LKMQB38× $\frac{1}{2}$ S	0608319*	M48×2	65	34	54	19	56	60	50	55	1342

*材料: G—碳钢; B—不锈钢。 *Material: G—Carbonsteel; B—Stainlesssteel.

TKMQA

端三通可调向接头—公制螺纹O型圈密封

Male branch tee adjustable union—Metric thread with O-ring seal

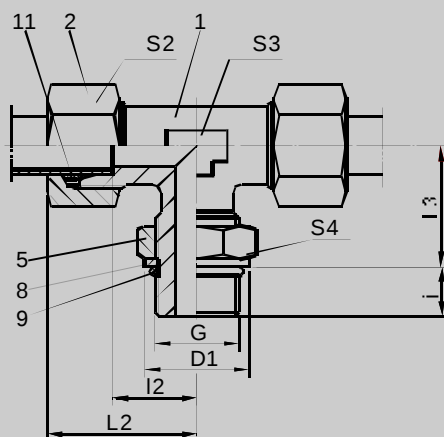

- Part1—本体 Tee body
- Part2—螺母 Nut
- Part5—调向螺母 Nut
- Part8—金属垫 Metal seal
- Part9—O形圈 O-ring
- Part11—卡套 Ferrule

TKMQA


订货示例：型号为TKMQA06L，材料为碳钢，仅供本体和螺母时，订货号为0608401G Part1+2。

Order example: Type is TKMQA06L, material is carbon steel, only ordering tee body and nut, the reference is 0608401G Part1+2.

Series 系列	PN	Tube OD 管子外径	Type 型号	Reference 订货号 TKMQA	G	L2	I2	I3	i	D1	S2	S3	S4	Weight 重量(g) TKMQA
L	315	06	TKMQA06L	0608401*	M10×1	29	14	20	7	15	14	14	14	93
	315	08	TKMQA08L	0608402*	M12×1.5	31	16	22	10	18	17	14	17	103
	315	10	TKMQA10L	0608403*	M14×1.5	32	17	25	10	20	19	19	19	175
	315	12	TKMQA12L	0608404*	M16×1.5	34	19	26	10	23	22	19	22	191
	315	15	TKMQA15L	0608405*	M18×1.5	36	21	30	11	25	27	22	24	331
	315	18	TKMQA18L	0608406*	M22×1.5	40	24	33	12	28	32	27	27	423
	160	22	TKMQA22L	0608407*	M27×2	44	28	35	14	33	36	30	32	737
	160	28	TKMQA28L	0608408*	M33×2	47	31	38	14	41	41	36	41	777
	160	35	TKMQA35L	0608409*	M42×2	59	38	48	14	51	50	50	50	1260
	160	42	TKMQA42L	0608410*	M48×2	61	38	49	16	56	60	50	55	1428
S	400	06	TKMQA06S	0608411*	M12×1.5	30	15	22	10	18	17	14	17	106
	400	08	TKMQA08S	0608412*	M14×1.5	32	17	26	10	20	19	19	19	177
	400	10	TKMQA10S	0608413*	M16×1.5	34	18	27	11	23	22	19	22	195
	400	12	TKMQA12S	0608414*	M18×1.5	38	22	31	12	25	24	22	24	313
	400	16	TKMQA16S	0608415*	M22×1.5	43	25	35	14	28	30	27	27	427
	400	20	TKMQA20S	0608416*	M27×2	49	28	39	16	33	36	30	32	775
	315	25	TKMQA25S	0608417*	M33×2	54	30	44	16	41	46	36	41	1007
	250	30	TKMQA30S	0608418*	M42×2	62	36	51	17	51	50	50	50	1436
	200	38	TKMQA38S	0608419*	M48×2	65	34	54	19	56	60	50	55	1656

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.

Male branch tee adjustable union—Metric thread with O-ring seal

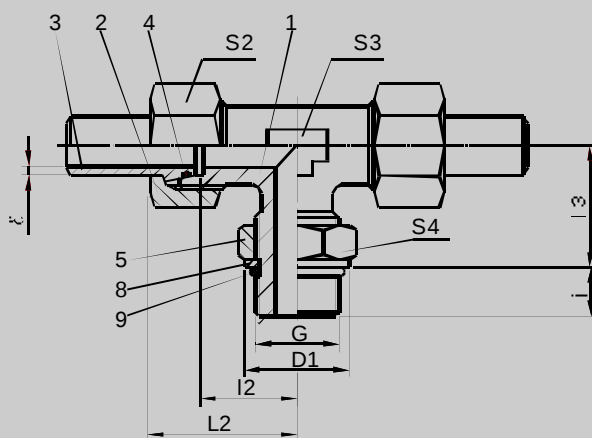

TKMQB

Part1—本体Teebody
Part2—螺母Nut
Part3—焊接头Weldingcone
Part4—O形圈O-ring
Part5—调向螺母Nut
Part8—金属垫Metalseal
Part9—O形圈O-ring

订货示例: 型号为TKMQB06× 5L, 材料为碳钢, 仅供本体和螺母时, 订货号为0608501G Part1+2。

Orderexample:Typeis TKMQB06× 1.5 L,materialiscarbonsteel,onlyorderingteebodyandnut,thereferenceis0608501G Part1+2.


Series 系列	Tube 管子	OD 外径	Type 型号	Reference 订货号										Weight 重量(g)
				TKMQB	G	L2	I2	I3	i	D1	S2	S3	S4	TKMQB
L	315	06	TKMQB06× $\frac{1}{8}$ L	0608501*	M10×1	29	14	20	7	15	14	14	14	100
	315	08	TKMQB08× $\frac{1}{8}$ L	0608502*	M12×1.5	31	16	22	10	18	17	14	17	112
	315	10	TKMQB10× $\frac{1}{8}$ L	0608503*	M14×1.5	32	17	25	10	20	19	19	19	191
	315	12	TKMQB12× $\frac{1}{8}$ L	0608504*	M16×1.5	34	19	26	10	23	22	19	22	212
	315	15	TKMQB15× $\frac{1}{8}$ L	0608505*	M18×1.5	36	21	30	11	25	27	22	24	361
	315	18	TKMQB18× $\frac{1}{8}$ L	0608506*	M22×1.5	40	24	33	12	28	32	27	27	458
	160	22	TKMQB22× $\frac{1}{8}$ L	0608507*	M27×2	44	28	35	14	33	36	30	32	785
	160	28	TKMQB28× $\frac{1}{8}$ L	0608508*	M33×2	47	31	38	14	41	41	36	41	852
	160	35	TKMQB35× $\frac{1}{8}$ L	0608509*	M42×2	59	38	48	14	51	50	50	50	1390
160	42	TKMQB42× $\frac{1}{8}$ L	0608510*	M48×2	61	38	49	16	56	60	50	55	1603	
S	400	06	TKMQB06× $\frac{1}{8}$ S	0608511*	M12×1.5	30	15	22	10	18	17	14	17	113
	400	08	TKMQB08× $\frac{1}{8}$ S	0608512*	M14×1.5	32	17	26	10	20	19	19	19	186
	400	10	TKMQB10× $\frac{1}{8}$ S	0608513*	M16×1.5	34	18	27	11	23	22	19	22	211
	400	12	TKMQB12× $\frac{1}{8}$ S	0608514*	M18×1.5	38	22	31	12	25	24	22	24	334
	400	16	TKMQB16× $\frac{1}{8}$ S	0608515*	M22×1.5	43	25	35	14	28	30	27	27	468
	400	20	TKMQB20× $\frac{1}{8}$ S	0608516*	M27×2	49	28	39	16	33	36	30	32	847
	315	25	TKMQB25× $\frac{1}{8}$ S	0608517*	M33×2	54	30	44	16	41	46	36	41	1137
	250	30	TKMQB30× $\frac{1}{8}$ S	0608518*	M42×2	62	36	51	17	51	50	50	50	1617
	200	38	TKMQB38× $\frac{1}{8}$ S	0608519*	M48×2	65	34	54	19	56	60	50	55	1956

*材料: G—碳钢; B—不锈钢。 *Material: G—Carbonsteel; B—Stainlesssteel.

FKMQA

直路端三通可调向接头—公制螺纹O型圈密封

Malerunteeadjustableunion—MetricthreadwithO-ringseal

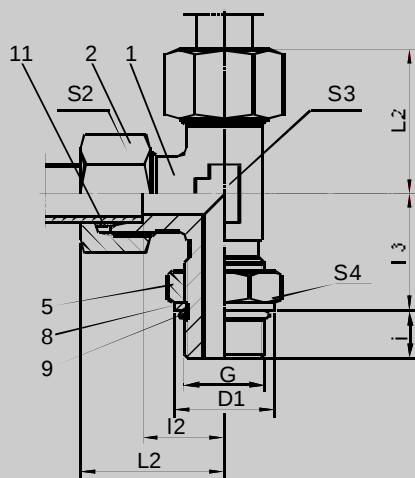

- Part1—本体Teebody
- Part2—螺母Nut
- Part5—调向螺母Nut
- Part8—金属垫Metalseal
- Part9—O形圈O-ring
- Part11—卡套Ferrule

FKMQA

订货示例：型号为FKMQA06L，材料为碳钢，仅供本体和螺母时，订货号为0608601G Part1+2。

Orderexample: Typeis FKMQA06L, materialiscarbonsteel, onlyorderingteebodyandnut, thereferenceis0608601G Part1+2.

Series 系列	Tube O D 管子外径	Type 型号	Reference 订货号	G	L2	I2	I3	i	D1	S2	S3	S4	Weight 重量(g)
	PN		FKMQA										FKMQA
L	315 06	FKMQA06L	0608601*	M10×1	29	14	20	7	15	14	14	14	93
	315 08	FKMQA08L	0608602*	M12×1.5	31	16	22	10	18	17	14	17	103
	315 10	FKMQA10L	0608603*	M14×1.5	32	17	25	10	20	19	19	19	175
	315 12	FKMQA12L	0608604*	M16×1.5	34	19	26	10	23	22	19	22	191
	315 15	FKMQA15L	0608605*	M18×1.5	36	21	30	11	25	27	22	24	331
	315 18	FKMQA18L	0608606*	M22×1.5	40	24	33	12	28	32	27	27	423
	160 22	FKMQA22L	0608607*	M27×2	44	28	35	14	33	36	30	32	737
	160 28	FKMQA28L	0608608*	M33×2	47	31	38	14	41	41	36	41	777
	160 35	FKMQA35L	0608609*	M42×2	59	38	48	14	51	50	50	50	1260
	160 42	FKMQA42L	0608610*	M48×2	61	38	49	16	56	60	50	55	1428
S	400 06	FKMQA06S	0608611*	M12×1.5	30	15	22	10	18	17	14	17	106
	400 08	FKMQA08S	0608612*	M14×1.5	32	17	26	10	20	19	19	19	177
	400 10	FKMQA10S	0608613*	M16×1.5	34	18	27	11	23	22	19	22	195
	400 12	FKMQA12S	0608614*	M18×1.5	38	22	31	12	25	24	22	24	313
	400 16	FKMQA16S	0608615*	M22×1.5	43	25	35	14	28	30	27	27	427
	400 20	FKMQA20S	0608616*	M27×2	49	28	35	16	33	36	30	32	775
	315 25	FKMQA25S	0608617*	M33×2	54	30	44	16	41	46	36	41	1007
	250 30	FKMQA30S	0608618*	M42×2	62	36	51	17	51	50	50	50	1436
	200 38	FKMQA38S	0608619*	M48×2	65	34	54	19	56	60	50	55	1656


*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbonsteel; B—Stainlesssteel; T—brass.

Malerunteeadjustableunion—MetricthreadwithO-ringseal

L45KMQA

端45° 可调向接头—公制螺纹O型圈密封

Male 45° elbow adjustable union—Metric thread with O-ring seal

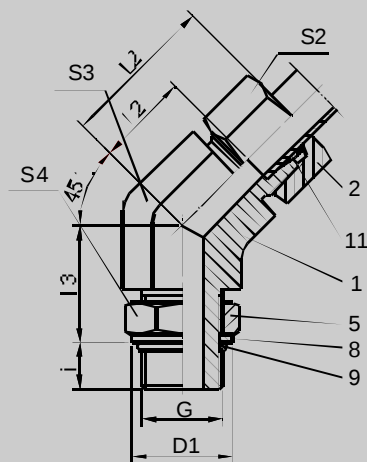

L45KMQA

- Part1—本体Elbowbody
- Part2—螺母Nut
- Part5—调向螺母Nut
- Part8—金属垫Metalseal
- Part9—O形圈O-ring
- Part11—卡套Ferrule

订货示例：型号为L45KMQA06L，材料为碳钢，仅供本体和螺母时，订货号为0608801G Part1+2。

Order example: Type is L45KMQA06L, material is carbon steel, only ordering elbow body and nut, the reference is 0608801G Part1+2.


Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号	L45KMQA	G	L2	I2	I3	i	D1	S2	S3	S4	Weight 重量(g)	L45KMQA
L	315	06	L45KMQA06L	0608801*	M10×1	29	14	20	7	15	14	14	14	57		
	315	08	L45KMQA08L	0608802*	M12×1.5	31	16	22	10	18	17	14	17	62		
	315	10	L45KMQA10L	0608803*	M14×1.5	32	17	25	10	20	19	19	19	104		
	315	12	L45KMQA12L	0608804*	M16×1.5	34	19	26	10	23	22	19	22	140		
	315	15	L45KMQA15L	0608805*	M18×1.5	36	21	30	11	25	27	22	24	198		
	315	18	L45KMQA18L	0608806*	M22×1.5	40	24	33	12	28	32	27	27	260		
	160	22	L45KMQA22L	0608807*	M27×2	44	28	35	14	33	36	30	32	382		
	160	28	L45KMQA28L	0608808*	M33×2	47	31	38	14	41	41	36	41	406		
	160	35	L45KMQA35L	0608809*	M42×2	59	38	48	14	51	50	50	50	729		
	160	42	L45KMQA42L	0608810*	M48×2	61	38	49	16	56	60	50	55	813		
S	400	06	L45KMQA06S	0608811*	M12×1.5	30	15	22	10	18	17	14	17	64		
	400	08	L45KMQA08S	0608812*	M14×1.5	32	17	26	10	20	19	19	19	105		
	400	10	L45KMQA10S	0608813*	M16×1.5	34	18	27	11	23	22	19	22	114		
	400	12	L45KMQA12S	0608814*	M18×1.5	38	22	31	12	25	24	22	24	149		
	400	16	L45KMQA16S	0608815*	M22×1.5	43	25	35	14	28	30	27	27	222		
	400	20	L45KMQA20S	0608816*	M27×2	49	28	39	16	33	36	30	32	401		
	315	25	L45KMQA25S	0608817*	M33×2	54	30	44	16	41	46	36	41	521		
	250	30	L45KMQA30S	0608818*	M42×2	62	36	51	17	51	50	50	50	817		
	200	38	L45KMQA38S	0608819*	M48×2	65	34	54	19	56	60	50	55	927		

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.

L45KMQB

端45° 可调向接头—公制螺纹O型圈密封

Male 45° elbow adjustable union—Metric thread with O-ring seal

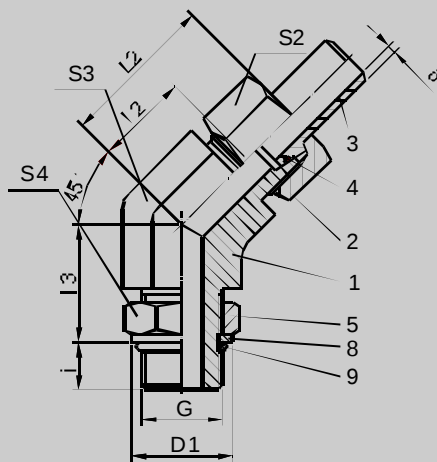

L45KMQB

- Part1—本体Elbowbody
- Part2—螺母Nut
- Part3—焊接头Weldingcone
- Part4—O形圈O-ring
- Part5—调向螺母Nut
- Part8—金属垫Metalseal
- Part9—O形圈O-ring

订货示例：型号为L45KMQB06× $\frac{1}{2}$ L，材料为碳钢，仅供本体和螺母时，订货号为0608901G Part1+2。

Order example: Type is L45KMQB06× $\frac{1}{2}$ L, material is carbon steel, only ordering elbow body and nut, the reference is 0608901G Part1+2.


Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号										Weight 重量(g)
				L45KMQB	G	L2	I2	I3	i	D1	S2	S3	S4	L45KMQB
L	315	06	L45KMQB06× $\frac{1}{2}$ L	0608901*	M10×1	29	14	20	7	15	14	14	14	64
	315	08	L45KMQB08× $\frac{1}{2}$ L	0608902*	M12×1.5	31	16	22	10	18	17	14	17	71
	315	10	L45KMQB10× $\frac{1}{2}$ L	0608903*	M14×1.5	32	17	25	10	20	19	19	19	120
	315	12	L45KMQB12× $\frac{1}{2}$ L	0608904*	M16×1.5	34	19	26	10	23	22	19	22	161
	315	15	L45KMQB15× $\frac{1}{2}$ L	0608905*	M18×1.5	36	21	30	11	25	27	22	24	228
	315	18	L45KMQB18× $\frac{1}{2}$ L	0608906*	M22×1.5	40	24	33	12	28	32	27	27	295
	160	22	L45KMQB22× $\frac{1}{2}$ L	0608907*	M27×2	44	28	35	14	33	36	30	32	430
	160	28	L45KMQB28× $\frac{1}{2}$ L	0608908*	M33×2	47	31	38	14	41	41	36	41	481
	160	35	L45KMQB35× $\frac{1}{2}$ L	0608909*	M42×2	59	38	48	14	51	50	50	50	859
	160	42	L45KMQB42× $\frac{1}{2}$ L	0608910*	M48×2	61	38	49	16	56	60	50	55	988
S	400	06	L45KMQB06× $\frac{1}{2}$ S	0608911*	M12×1.5	30	15	22	10	18	17	14	17	71
	400	08	L45KMQB08× $\frac{1}{2}$ S	0608912*	M14×1.5	32	17	26	10	20	19	19	19	114
	400	10	L45KMQB10× $\frac{1}{2}$ S	0608913*	M16×1.5	34	18	27	11	23	22	19	22	130
	400	12	L45KMQB12× $\frac{1}{2}$ S	0608914*	M18×1.5	38	22	31	12	25	24	22	24	170
	400	16	L45KMQB16× $\frac{1}{2}$ S	0608915*	M22×1.5	43	25	35	14	28	30	27	27	263
	400	20	L45KMQB20× $\frac{1}{2}$ S	0608916*	M27×2	49	28	39	16	33	36	30	32	473
	315	25	L45KMQB25× $\frac{1}{2}$ S	0608917*	M33×2	54	30	44	16	41	46	36	41	651
	250	30	L45KMQB30× $\frac{1}{2}$ S	0608918*	M42×2	62	36	51	17	51	50	50	50	998
	200	38	L45KMQB38× $\frac{1}{2}$ S	0608919*	M48×2	65	34	54	19	56	60	50	55	1227

*材料: G—碳钢; B—不锈钢。 *Material: G—Carbon steel; B—Stainless steel.

LKGOA

端直角可调向接头—英制螺纹

Maleelbowadjustableunion—Britishstandardthread

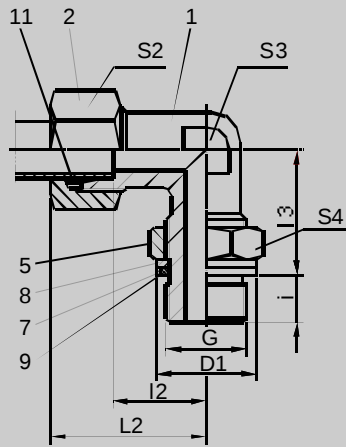

LKGOA

Part1—本体Elbowbody

Part2—螺母Nut

Part5—调向螺母Nut

Part7—金属圈Metallring

Part8—金属垫Metalseal

Part9—O形圈O-ring

Part11—卡套Ferrule

订货示例：型号为LKGOA04LL，材料为碳钢，仅供本体和螺母时，订货号为0609001G Part1+2。

Orderexample:Typeis LKGOA04LL,materialiscarbonsteel,onlyorderingelbowbodyandnut,thereferenceis0609001G Part1+2.


Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号 LKGOA	G	L2	I2	I3	i	D1	S2	S3	S4	Weight 重量(g) LKGOA
LL	250	04	LKGOA04LL	0609001*	G1/8A	21	11.3	20	6.5	15	10	11	14	66
	250	06	LKGOA06LL	0609002*	G1/8A	21	11.3	20	6.5	15	12	11	14	66
	315	06	LKGOA06L	0609003*	G1/8A	29	14	19	7	15	14	14	14	66
	315	08	LKGOA08L	0609004*	G1/4A	31	16	23	9	20	17	14	19	66
	315	10	LKGOA10L	0609005*	G1/4A	32	17	25	9	20	19	19	19	119
L	315	12	LKGOA12L	0609006*	G3/8A	34	19	28	9	23	22	19	22	138
	315	15	LKGOA15L	0609007*	G1/2A	36	21	30	13	28	27	22	27	283
	250	18	LKGOA18L	0609008*	G1/2A	40	24	36	13	28	32	27	27	344
	160	22	LKGOA22L	0609009*	G3/4A	44	28	36	13	33	36	30	36	449
	160	28	LKGOA28L	0609010*	G1A	47	31	44	15	41	41	36	41	657
	160	35	LKGOA35L	0609011*	G1 1/4A	59	38	50	15	51	50	50	50	1113
	160	42	LKGOA42L	0609012*	G1 1/2A	61	38	52	15	56	60	50	55	1197
	315	06	LKGOA06S	0609013*	G1/4A	30	15	23	9	20	17	14	19	69
	315	08	LKGOA08S	0609014*	G1/4A	32	17	27	9	20	19	19	19	120
	315	10	LKGOA10S	0609015*	G3/8A	34	18	29	9	23	22	19	22	138
S	315	12	LKGOA12S	0609016*	G3/8A	38	22	29	9	23	24	22	22	206
	250	16	LKGOA16S	0609017*	G1/2A	43	25	36	13	28	30	27	27	346
	250	20	LKGOA20S	0609018*	G3/4A	49	28	39	12	33	36	30	36	468
	160	25	LKGOA25S	0609019*	G1A	54	30	44	14	41	46	36	41	772
	160	30	LKGOA30S	0609020*	G1 1/4A	62	36	49	15	51	50	50	50	1069
	160	38	LKGOA38S	0609021*	G1 1/2A	65	34	55	15	56	60	50	55	1311

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbonsteel; B—Stainlesssteel; T—brass.

LKGOB

端直角可调向接头—英制螺纹

Maleelbowadjustableunion—Britishstandardthread

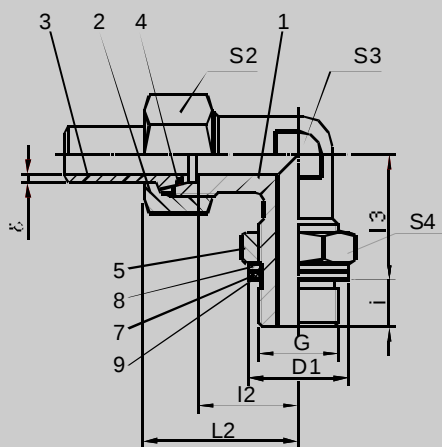

LKGOB

- Part1—本体Elbowbody
- Part2—螺母Nut
- Part3—焊接头Weldingcone
- Part4—O形圈O-ring
- Part5—调向螺母Nut
- Part7—金属圈Metalring
- Part8—金属垫Metalseal
- Part9—O形圈O-ring

订货示例：型号为LKGOB06× $\frac{1}{2}$ L，材料为碳钢，仅供本体和螺母时，订货号为0609101G Part1+2。

Orderexample: Typeis LKGOB06× $\frac{1}{2}$ L, materialiscarbonsteel, onlyorderingelbowbodyandnut, thereferenceis 0609101G Part1+2.


Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号										Weight 重量(g)
				LKGOB	G	L2	I2	I3	i	D1	S2	S3	S4	LKGOB
L	315	06	LKGOB06× $\frac{1}{2}$ L	0609101*	G1/8A	29	14	19	7	15	14	14	14	73
	315	08	LKGOB08× $\frac{1}{2}$ L	0609102*	G1/4A	31	16	23	9	20	17	14	19	75
	315	10	LKGOB10× $\frac{1}{2}$ L	0609103*	G1/4A	32	17	25	9	20	19	19	19	135
	315	12	LKGOB12× $\frac{1}{2}$ L	0609104*	G3/8A	34	19	28	9	23	22	19	22	159
	315	15	LKGOB15× $\frac{1}{2}$ L	0609105*	G1/2A	36	21	30	13	28	27	22	27	313
	250	18	LKGOB18× $\frac{1}{2}$ L	0609106*	G1/2A	40	24	36	13	28	32	27	27	379
	160	22	LKGOB22× $\frac{1}{2}$ L	0609107*	G3/4A	44	28	36	13	33	36	30	36	497
	160	28	LKGOB28× $\frac{1}{2}$ L	0609108*	G1A	47	31	44	15	41	41	36	41	732
	160	35	LKGOB35× $\frac{1}{2}$ L	0609109*	G1 1/4A	59	38	50	15	51	50	50	50	1243
	160	42	LKGOB42× $\frac{1}{2}$ L	0609110*	G1 1/2A	61	38	52	15	56	60	50	55	1372
S	315	06	LKGOB06× $\frac{1}{2}$ S	0609111*	G1/4A	30	15	23	9	20	17	14	19	76
	315	08	LKGOB08× $\frac{1}{2}$ S	0609112*	G1/4A	32	17	27	9	20	19	19	19	129
	315	10	LKGOB10× $\frac{1}{2}$ S	0609113*	G3/8A	34	18	29	9	23	22	19	22	154
	315	12	LKGOB12× $\frac{1}{2}$ S	0609114*	G3/8A	38	22	29	9	23	24	22	22	227
	250	16	LKGOB16× $\frac{1}{2}$ S	0609115*	G1/2A	43	25	36	13	28	30	27	27	387
	250	20	LKGOB20× $\frac{1}{2}$ S	0609116*	G3/4A	49	28	39	12	33	36	30	36	540
	160	25	LKGOB25× $\frac{1}{2}$ S	0609117*	G1A	54	30	44	14	41	46	36	41	902
	160	30	LKGOB30× $\frac{1}{2}$ S	0609118*	G1 1/4A	62	36	49	15	51	50	50	50	1250
	160	38	LKGOB38× $\frac{1}{2}$ S	0609119*	G1 1/2A	65	34	55	15	56	60	50	55	1611

*材料: G—碳钢; B—不锈钢。 *Material: G—Carbonsteel; B—Stainlesssteel.

TKGOA

端三通可调向接头—英制螺纹

Male branch tee adjustable union—British standard thread

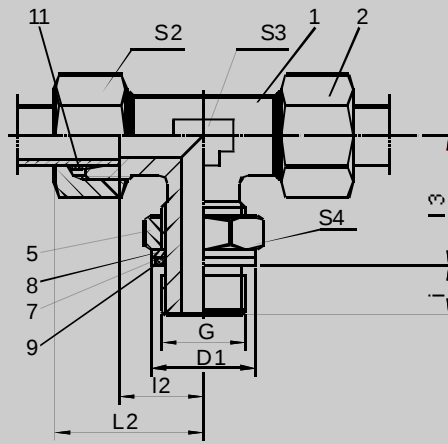

TKGOA

- Part1—本体 Tee body
Part2—螺母 Nut
Part5—调向螺母 Nut
Part7—金属圈 Metal ring
Part8—金属垫 Metal seal
Part9—O形圈 O-ring
Part11—卡套 Ferrule

订货示例：型号为TKGOA06L，材料为碳钢，仅供本体和螺母时，订货号为0609201G Part1+2。

Order example: Type is TKGOA06L, material is carbon steel, only ordering tee body and nut, the reference is 0609201G Part1+2.


Series 系列	Tube O D 管子外径	Type 型号	Reference 订货号 TKGOA	G	L2	I2	I3	i	D1	S2	S3	S4	Weight 重量(g) TKGOA
L	315 06	TKGOA06L	0609201*	G1/8A	29	14	19	7	15	14	14	14	93
	315 08	TKGOA08L	0609202*	G1/4A	31	16	23	9	20	17	14	19	103
	315 10	TKGOA10L	0609203*	G1/4A	32	17	25	9	20	19	19	19	171
	315 12	TKGOA12L	0609204*	G3/8A	34	19	28	9	23	22	19	22	206
	315 15	TKGOA15L	0609205*	G1/2A	36	21	30	13	28	27	22	27	313
	250 18	TKGOA18L	0609206*	G1/2A	40	24	36	13	28	32	27	27	428
	160 22	TKGOA22L	0609207*	G3/4A	44	28	36	13	33	36	30	36	719
	160 28	TKGOA28L	0609208*	G1A	47	31	44	15	41	41	36	41	812
	160 35	TKGOA35L	0609209*	G1 1/4A	59	38	50	15	51	50	50	50	1260
	160 42	TKGOA42L	0609210*	G1 1/2A	61	38	52	15	56	60	50	55	1428
S	315 06	TKGOA06S	0609211*	G1/4A	30	15	23	9	20	17	14	19	109
	315 08	TKGOA08S	0609212*	G1/4A	32	17	27	9	20	19	19	19	153
	315 10	TKGOA10S	0609213*	G3/8A	34	18	29	9	23	22	19	22	191
	315 12	TKGOA12S	0609214*	G3/8A	38	22	29	9	23	24	22	22	238
	250 16	TKGOA16S	0609215*	G1/2A	43	25	36	13	28	30	27	27	432
	250 20	TKGOA20S	0609216*	G3/4A	49	28	39	12	33	36	30	36	757
	160 25	TKGOA25S	0609217*	G1A	54	30	44	14	41	46	36	41	1042
	160 30	TKGOA30S	0609218*	G1 1/4A	62	36	49	15	51	50	50	50	1436
	160 38	TKGOA38S	0609219*	G1 1/2A	65	34	55	15	56	60	50	55	1656

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.

TKGOB

端三通可调向接头—英制螺纹

Male branch tee adjustable union—British standard thread

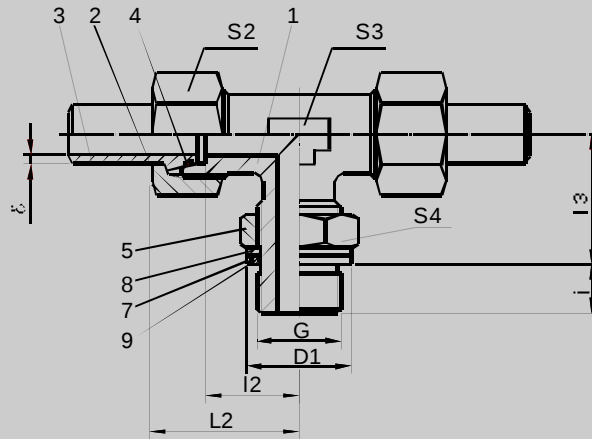

TKGOB

- Part1—本体 Tee body
Part2—螺母 Nut
Part3—焊接头 Welding cone
Part4—O形圈 O-ring
Part5—调向螺母 Nut
Part7—金属圈 Metal ring
Part8—金属垫 Metal seal
Part9—O形圈 O-ring

订货示例：型号为TKGOB06× $\frac{1}{2}$ L，材料为碳钢，仅供本体和螺母时，订货号为0609301G Part1+2。

Order example: Type is TKGOB06× $\frac{1}{2}$ L, material is carbon steel, only ordering tee body and nut, the reference is 0609301G Part1+2.


Series 系列	PN	Tube O D 管子外径	Type 型号	Reference 订货号											Weight 重量(g)
				TKGOB	G	L2	I2	I3	i	D1	S2	S3	S4	TKGOB	
L	315	06	TKGOB06× $\frac{1}{2}$ L	0609301*	G1/8A	29	14	19	7	15	14	14	14	102	
	315	08	TKGOB08× $\frac{1}{2}$ L	0609302*	G1/4A	31	16	23	9	20	17	14	19	112	
	315	10	TKGOB10× $\frac{1}{2}$ L	0609303*	G1/4A	32	17	25	9	20	19	19	19	187	
	315	12	TKGOB12× $\frac{1}{2}$ L	0609304*	G3/8A	34	19	28	9	23	22	19	22	227	
	315	15	TKGOB15× $\frac{1}{2}$ L	0609305*	G1/2A	36	21	30	13	28	27	22	27	343	
	250	18	TKGOB18× $\frac{1}{2}$ L	0609306*	G1/2A	40	24	36	13	28	32	27	27	463	
	160	22	TKGOB22× $\frac{1}{2}$ L	0609307*	G3/4A	44	28	36	13	33	36	30	36	767	
	160	28	TKGOB28× $\frac{1}{2}$ L	0609308*	G1A	47	31	44	15	41	41	36	41	887	
	160	35	TKGOB35× $\frac{1}{2}$ L	0609309*	G1 1/4A	59	38	50	15	51	50	50	50	1390	
160	42	TKGOB42× $\frac{1}{2}$ L	0609310*	G1 1/2A	61	38	52	15	56	60	50	55	1603		
S	315	06	TKGOB06× $\frac{1}{2}$ S	0609311*	G1/4A	30	15	23	9	20	17	14	19	116	
	315	08	TKGOB08× $\frac{1}{2}$ S	0609312*	G1/4A	32	17	27	9	20	19	19	19	162	
	315	10	TKGOB10× $\frac{1}{2}$ S	0609313*	G3/8A	34	18	29	9	23	22	19	22	207	
	315	12	TKGOB12× $\frac{1}{2}$ S	0609314*	G3/8A	38	22	29	9	23	24	22	22	259	
	250	16	TKGOB16× $\frac{1}{2}$ S	0609315*	G1/2A	43	25	36	13	28	30	27	27	473	
	250	20	TKGOB20× $\frac{1}{2}$ S	0609316*	G3/4A	49	28	39	12	33	36	30	36	829	
	160	25	TKGOB25× $\frac{1}{2}$ S	0609317*	G1A	54	30	44	14	41	46	36	41	1172	
	160	30	TKGOB30× $\frac{1}{2}$ S	0609318*	G1 1/4A	62	36	49	15	51	50	50	50	1617	
	160	38	TKGOB38× $\frac{1}{2}$ S	0609319*	G1 1/2A	65	34	55	15	56	60	50	55	1956	

*材料: G—碳钢; B—不锈钢。 *Material: G—Carbon steel; B—Stainless steel.

FKGOA

直路端三通可调向接头—英制螺纹

Malerunteeadjustableunion—Britishstandardthread

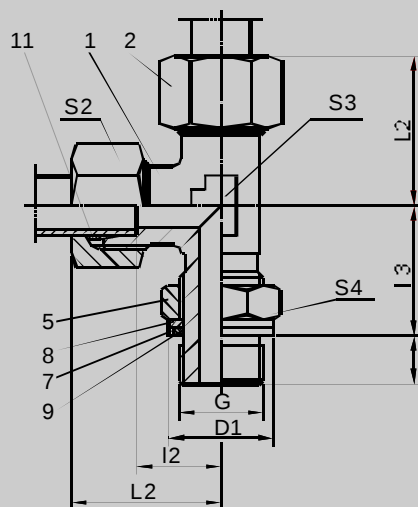

FKGOA

- Part1—本体Teebody
- Part2—螺母Nut
- Part5—调向螺母Nut
- Part7—金属圈Metalring
- Part8—金属垫Metalseal
- Part9—O形圈O-ring
- Part11—卡套Ferrule

订货示例：型号为FKGOA06L，材料为碳钢，仅供本体和螺母时，订货号为0609401G Part1+2。
Orderexample:Typeis FKGOA06L,materialiscarbonsteel,onlyorderingteebodyandnut,thereferenceis 0609401G Part1+2.


Series	Tube OD	Type	Reference	Weight
系列	管子外径	型号	订货号	重量(g)
	PN		FKGOA	FKGOA
L	315 06	FKGOA06L	0609401*	93
	315 08	FKGOA08L	0609402*	103
	315 10	FKGOA10L	0609403*	171
	315 12	FKGOA12L	0609404*	206
	315 15	FKGOA15L	0609405*	313
	250 18	FKGOA18L	0609406*	428
	160 22	FKGOA22L	0609407*	719
	160 28	FKGOA28L	0609408*	812
	160 35	FKGOA35L	0609409*	1260
	160 42	FKGOA42L	0609410*	1428
S	315 06	FKGOA06S	0609411*	109
	315 08	FKGOA08S	0609412*	153
	315 10	FKGOA10S	0609413*	191
	315 12	FKGOA12S	0609414*	238
	250 16	FKGOA16S	0609415*	432
	250 20	FKGOA20S	0609416*	757
	160 25	FKGOA25S	0609417*	1042
	160 30	FKGOA30S	0609418*	1436
	160 38	FKGOA38S	0609419*	1656

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material:G—Carbonsteel;B—Stainlesssteel;T—brass.

FKGOB

直路端三通可调向接头—英制螺纹

Malerunteeadjustableunion—Britishstandardthread

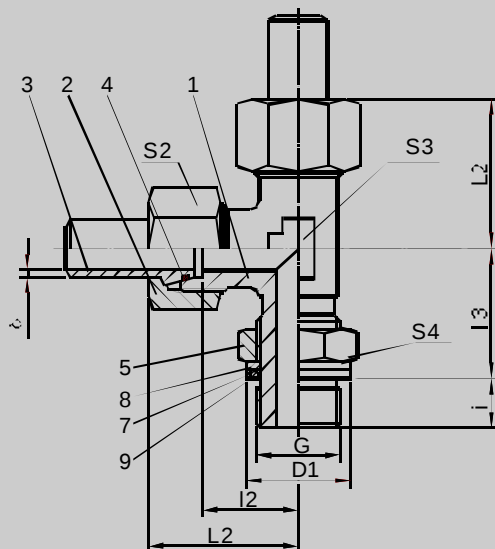

FKGOB

- Part1—本体Teebody
- Part2—螺母Nut
- Part3—焊接头Weldingcone
- Part4—O形圈O-ring
- Part5—调向螺母Nut
- Part7—金属圈Metalring
- Part8—金属垫Metalseal
- Part9—O形圈O-ring


订货示例：型号为FKGOB06× $\frac{1}{2}$ L，材料为碳钢，仅供本体和螺母时，订货号为0609501G Part1+2。

Orderexample:Typeis FKGOB06× $\frac{1}{2}$ L,materialiscarbonsteel,onlyorderingteebodyandnut,thereferenceis 0609501G Part1+2.

Series 系列	PN	Tube OD 管子外径	Type 型号	Reference 订货号 FKGOB	G	L2	I2	I3	i	D1	S2	S3	S4	Weight 重量(g) FKGOB
L	315	06	FKGOB06× $\frac{1}{2}$ L	0609501*	G1/8A	29	14	19	7	15	14	14	14	100
	315	08	FKGOB08× $\frac{1}{2}$ L	0609502*	G1/4A	31	16	23	9	20	17	14	19	112
	315	10	FKGOB10× $\frac{1}{2}$ L	0609503*	G1/4A	32	17	25	9	20	19	19	19	187
	315	12	FKGOB12× $\frac{1}{2}$ L	0609504*	G3/8A	34	19	28	9	23	22	19	22	227
	315	15	FKGOB15× $\frac{1}{2}$ L	0609505*	G1/2A	36	21	30	13	28	27	22	27	343
	250	18	FKGOB18× $\frac{1}{2}$ L	0609506*	G1/2A	40	24	36	13	28	32	27	27	463
	160	22	FKGOB22× $\frac{1}{2}$ L	0609507*	G3/4A	44	28	36	13	33	36	30	36	767
	160	28	FKGOB28× $\frac{1}{2}$ L	0609508*	G1A	47	31	44	15	41	41	36	41	887
	160	35	FKGOB35× $\frac{1}{2}$ L	0609509*	G11/4A	59	38	50	15	51	50	50	50	1390
	160	42	FKGOB42× $\frac{1}{2}$ L	0609510*	G11/2A	61	38	52	15	56	60	50	55	1630
S	315	06	FKGOB06× $\frac{1}{2}$ S	0609511*	G1/4A	30	15	23	9	20	17	14	19	116
	315	08	FKGOB08× $\frac{1}{2}$ S	0609512*	G1/4A	32	17	27	9	20	19	19	19	162
	315	10	FKGOB10× $\frac{1}{2}$ S	0609513*	G3/8A	34	18	29	9	23	22	19	22	207
	315	12	FKGOB12× $\frac{1}{2}$ S	0609514*	G3/8A	38	22	29	9	23	24	22	22	259
	250	16	FKGOB16× $\frac{1}{2}$ S	0609515*	G1/2A	43	25	36	13	28	30	27	27	473
	250	20	FKGOB20× $\frac{1}{2}$ S	0609516*	G3/4A	49	28	39	12	33	36	30	36	832
	160	25	FKGOB25× $\frac{1}{2}$ S	0609517*	G1A	54	30	44	14	41	46	36	41	1172
	160	30	FKGOB30× $\frac{1}{2}$ S	0609518*	G11/4A	62	36	49	15	51	50	50	50	1617
	160	38	FKGOB38× $\frac{1}{2}$ S	0609519*	G11/2A	65	34	55	15	56	60	50	55	1956

*材料：G—碳钢；B—不锈钢。 *Material:G—Carbonsteel;B—Stainlesssteel.

Male 45' elbow adjustable union—British standard thread

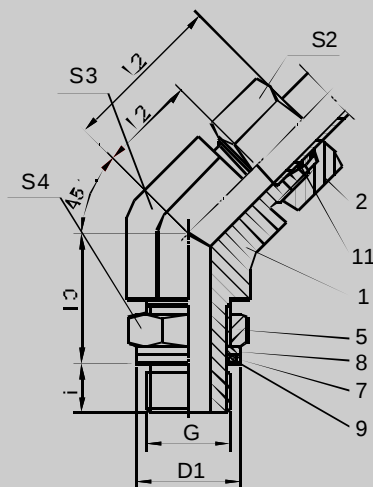

Part1—本体Elbowbody
Part2—螺母Nut
Part5—调向螺母Nut
Part7—金属圈Metalring
Part8—金属垫Metalseal
Part9—O形圈O-ring
Part11—卡套Ferrule


Order example: Type is L45KGOA06L, material is carbon steel, only ordering the bow body and nut, the reference is 0609601G Part1+2.

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbonsteel; B—Stainlesssteel; T—brass.

LKUQA

端直角可调向接头—美制螺纹O型圈密封

Maleelbowadjustableunion—AmericanstandardthreadwithO-ringseal

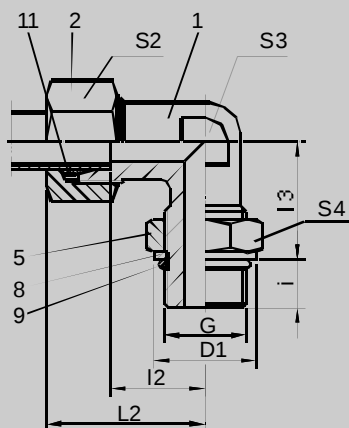

LKUQA

- Part1—本体Elbowbody
- Part2—螺母Nut
- Part5—调向螺母Nut
- Part8—金属垫Metalseal
- Part9—O形圈O-ring
- Part11—卡套Ferrule

订货示例：型号为LKUQA06L，材料为碳钢，仅供本体和螺母时，订货号为0609801G Part1+2。

Orderexample:Typeis LKUQA06L,materialiscarbonsteel,onlyorderingelbowbodyandnut,thereferenceis0609801G Part1+2.


Series	Tube OD	Type	Reference											Weight
系列	PN	管子外径	型号	订货号	G	L2	I2	I3	i	D1	S2	S3	S4	重量(g)
				LKUQA										LKUQA
L	315	06	LKUQA06L	0609801*	7/16-20UNF-2A	29	14	19	10	16.5	14	14	14	65
	315	08	LKUQA08L	0609802*	7/16-20UNF-2A	31	16	19	10	18.3	17	14	14	70
	315	10	LKUQA10L	0609803*	9/16-18UNF-2A	32	17	24	10	20.2	19	19	17	90
	315	12	LKUQA12L	0609804*	9/16-18UNF-2A	34	19	25	11	25.7	22	19	17	110
	315	12	LKUQA12L	0609805*	3/4-16UNF-2A	34	19	25	13	25.7	22	19	22	194
	315	15	LKUQA15L	0609806*	3/4-16UNF-2A	36	21	28	13	29.3	27	22	22	185
	315	15	LKUQA15L	0609807*	7/8-14UNF-2A	36	21	28	15	29.3	27	22	27	188
	315	18	LKUQA18L	0609808*	7/8-14UNF-2A	40	24	32	15	29.3	32	27	27	284
	315	18	LKUQA18L	0609809*	11/16-12UN-2A	40	24	32	17	29.3	32	30	32	318
	160	22	LKUQA22L	0609810*	11/16-12UN-2A	44	28	35	17	36.7	36	30	32	535
	160	28	LKUQA28L	0609811*	15/16-12UN-2A	47	31	42	17	44.0	41	36	41	452
	160	35	LKUQA35L	0609812*	15/8-12UN-2A	59	38	46	17	55.0	50	50	50	844
	160	42	LKUQA42L	0609813*	17/8-12UN-2A	61	38	47	17	55.0	60	50	55	928
	400	06	LKUQA06S	0609814*	7/16-20UNF-2A	30	15	20	12	16.5	17	14	14	65
	400	08	LKUQA08S	0609815*	9/16-18UNF-2A	32	17	25	12	18.3	19	19	17	85
S	400	10	LKUQA10S	0609816*	9/16-18UNF-2A	34	18	26	12	20.2	22	19	17	90
	400	12	LKUQA12S	0609817*	3/4-16UNF-2A	38	22	30	14	25.7	24	22	22	213
	400	16	LKUQA16S	0609818*	7/8-14UNF-2A	43	25	34	16	29.3	30	27	27	286
	400	20	LKUQA20S	0609819*	11/16-12UN-2A	49	28	37	19	36.7	36	30	32	555
	400	25	LKUQA25S	0609820*	11/16-12UN-2A	54	30	50	19	44.0	46	36	32	694
	250	30	LKUQA30S	0609821*	15/8-12UN-2A	62	36	50	19	55.0	50	50	50	932
	250	38	LKUQA38S	0609822*	17/8-12UN-2A	65	34	51	19	55.0	60	50	55	1042

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material:G—Carbonsteel;B—Stainlesssteel;T—brass.

LKUQB

端直角可调向接头—美制螺纹O型圈密封

Malelbowadjustableunion—AmericanstandardthreadwithO-ringseal

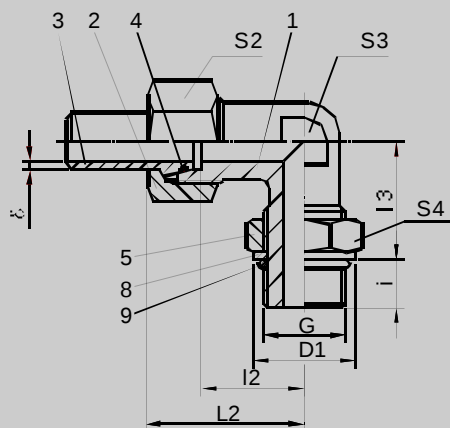

- Part1—本体Elbowbody
- Part2—螺母Nut
- Part3—焊接头Weldingcone
- Part4—O形圈O-ring
- Part5—调向螺母Nut
- Part8—金属垫Metalseal
- Part9—O形圈O-ring

LKUQB

订货示例：型号为LKUQB06× $\frac{1}{2}$ L，材料为碳钢，仅供本体和螺母时，订货号为0609901G Part1+2。

Orderexample:Typeis LKUQB06× $\frac{1}{2}$ L,materialiscarbonsteel,onlyorderingelbowbodyandnut,thereferenceis0609901G Part1+2.

Series	Tube OD	Type	Reference											Weight
系列	PN	管子外径	型号	订货号	G	L2	L2	L3	i	D1	S2	S3	S4	重量(g)
				LKUQB										LKUQB
L	315 06		LKUQB06× $\frac{1}{2}$ L	0609901*	7/16-20UNF-2A	29	14	19	10	16.5	14	14	14	72
	315 08		LKUQB08× $\frac{1}{2}$ L	0609902*	7/16-20UNF-2A	31	16	19	10	18.3	17	14	14	79
	315 10		LKUQB10× $\frac{1}{2}$ L	0609903*	9/16-18UNF-2A	32	17	24	10	20.2	19	19	17	106
	315 12		LKUQB12× $\frac{1}{2}$ L	0609904*	9/16-18UNF-2A	34	19	25	11	25.7	22	19	17	131
	315 12		LKUQB12× $\frac{1}{2}$ L	0609905*	3/4-16UNF-2A	34	19	25	13	25.7	22	19	22	215
	315 15		LKUQB15× $\frac{1}{2}$ L	0609906*	3/4-16UNF-2A	36	21	28	13	29.3	27	22	22	215
	315 15		LKUQB15× $\frac{1}{2}$ L	0609907*	7/8-14UNF-2A	36	21	28	15	29.3	27	22	27	218
	315 18		LKUQB18× $\frac{1}{2}$ L	0609908*	7/8-14UNF-2A	40	24	32	15	29.3	32	27	27	319
	315 18		LKUQB18× $\frac{1}{2}$ L	0609909*	11/16-12UN-2A	40	24	32	17	29.3	32	30	32	353
	160 22		LKUQB22× $\frac{1}{2}$ L	0609910*	11/16-12UN-2A	44	28	35	17	36.7	36	30	32	583
	160 28		LKUQB28× $\frac{1}{2}$ L	0609911*	15/16-12UN-2A	47	31	42	17	44.0	41	36	41	527
	160 35		LKUQB35× $\frac{1}{2}$ L	0609912*	15/8-12UN-2A	59	38	46	17	55.0	50	50	50	974
	160 42		LKUQB42× $\frac{1}{2}$ L	0609913*	17/8-12UN-2A	61	38	47	17	55.0	60	50	55	1103
S	400 06		LKUQB06× $\frac{1}{2}$ S	0609914*	7/16-20UNF-2A	30	15	20	12	16.5	17	14	14	72
	400 08		LKUQB08× $\frac{1}{2}$ S	0609915*	9/16-18UNF-2A	32	17	25	12	18.3	19	19	17	94
	400 10		LKUQB10× $\frac{1}{2}$ S	0609916*	9/16-18UNF-2A	34	18	26	12	20.2	22	19	17	106
	400 12		LKUQB12× $\frac{1}{2}$ S	0609917*	3/4-16UNF-2A	38	22	30	14	25.7	24	22	22	234
	400 16		LKUQB16× $\frac{1}{2}$ S	0609918*	7/8-14UNF-2A	43	25	34	16	29.3	30	27	27	327
	400 20		LKUQB20× $\frac{1}{2}$ S	0609919*	11/16-12UN-2A	49	28	37	19	36.7	36	30	32	627
	400 25		LKUQB25× $\frac{1}{2}$ S	0609920*	11/16-12UN-2A	54	30	50	19	44.0	46	36	32	824
	250 30		LKUQB30× $\frac{1}{2}$ S	0609921*	15/8-12UN-2A	62	36	50	19	55.0	50	50	50	1113
	250 38		LKUQB38× $\frac{1}{2}$ S	0609922*	17/8-12UN-2A	65	34	51	19	55.0	60	50	55	1342

*材料: G—碳钢; B—不锈钢。 *Material: G—Carbonsteel; B—Stainlesssteel.


TKUQA

端三通可调向接头—美制螺纹O型圈密封

Male branch tee adjustable union—American standard thread with O-ring seal



- Part1—本体 Tee body
Part2—螺母 Nut
Part5—调向螺母 Nut
Part8—金属垫 Metal seal
Part9—O形圈 O-ring
Part11—卡套 Ferrule

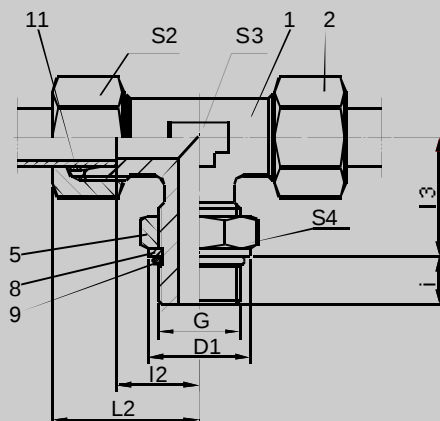

TKUQA

订货示例：型号为TKUQA06L，材料为碳钢，仅供本体和螺母时，订货号为0610001G Part1+2。

Order example: Type is TKUQA06L, material is carbon steel, only ordering tee body and nut, the reference is 0610001G Part1+2.

Series 系列	Tube O D 管子外径	Type 型号	Reference 订货号 TKUQA	G	L2	I2	I3	i	D1	S2	S3	S4	Weight 重量(g) TKUQA
L	315 06	TKUQA06L	0610001*	7/16-20UNF-2A	29	14	19	10	16.5	14	14	14	91
	315 08	TKUQA08L	0610002*	7/16-20UNF-2A	31	16	19	10	18.3	17	14	14	101
	315 10	TKUQA10L	0610003*	9/16-18UNF-2A	32	17	24	10	20.2	19	19	17	175
	315 12	TKUQA12L	0610004*	9/16-18UNF-2A	34	19	25	11	25.7	22	19	17	191
	315 12	TKUQA12L	0610005*	3/4-16UNF-2A	34	19	25	13	25.7	22	19	22	247
	315 15	TKUQA15L	0610006*	3/4-16UNF-2A	36	21	28	13	29.3	27	22	22	329
	315 15	TKUQA15L	0610007*	7/8-14UNF-2A	36	21	28	15	29.3	27	22	27	329
	315 18	TKUQA18L	0610008*	7/8-14UNF-2A	40	24	32	15	29.3	32	27	27	419
	315 18	TKUQA18L	0610009*	11/16-12UN-2A	40	24	32	17	29.3	32	30	32	581
	160 22	TKUQA22L	0610010*	11/16-12UN-2A	44	28	35	17	36.7	36	30	32	629
S	160 28	TKUQA28L	0610011*	15/16-12UN-2A	47	31	42	17	44.0	41	36	41	751
	160 35	TKUQA35L	0610012*	15/8-12UN-2A	59	38	46	17	55.0	50	50	50	1262
	160 42	TKUQA42L	0610013*	17/8-12UN-2A	61	38	47	17	55.0	60	50	55	1480
	400 06	TKUQA06S	0610014*	7/16-20UNF-2A	30	15	20	12	16.5	17	14	14	107
	400 08	TKUQA08S	0610015*	9/16-18UNF-2A	32	17	25	12	18.3	19	19	17	177
	400 10	TKUQA10S	0610016*	9/16-18UNF-2A	34	18	26	12	20.2	22	19	17	195
	400 12	TKUQA12S	0610017*	3/4-16UNF-2A	38	22	30	14	25.7	24	22	22	311
	400 16	TKUQA16S	0610018*	7/8-14UNF-2A	43	25	34	16	29.3	30	27	27	423
	400 20	TKUQA20S	0610019*	11/16-12UN-2A	49	28	37	19	36.7	36	30	32	667
	400 25	TKUQA25S	0610020*	11/16-12UN-2A	54	30	50	19	44.0	46	36	32	981
	250 30	TKUQA30S	0610021*	15/8-12UN-2A	62	36	50	19	55.0	50	50	50	1438
	250 38	TKUQA38S	0610022*	17/8-12UN-2A	65	34	51	19	55.0	60	50	55	1658

*材料: G—碳钢; B—不锈钢; T—黄铜。 *Material: G—Carbon steel; B—Stainless steel; T—brass.